


CABINET SCREEN GS-P7.8

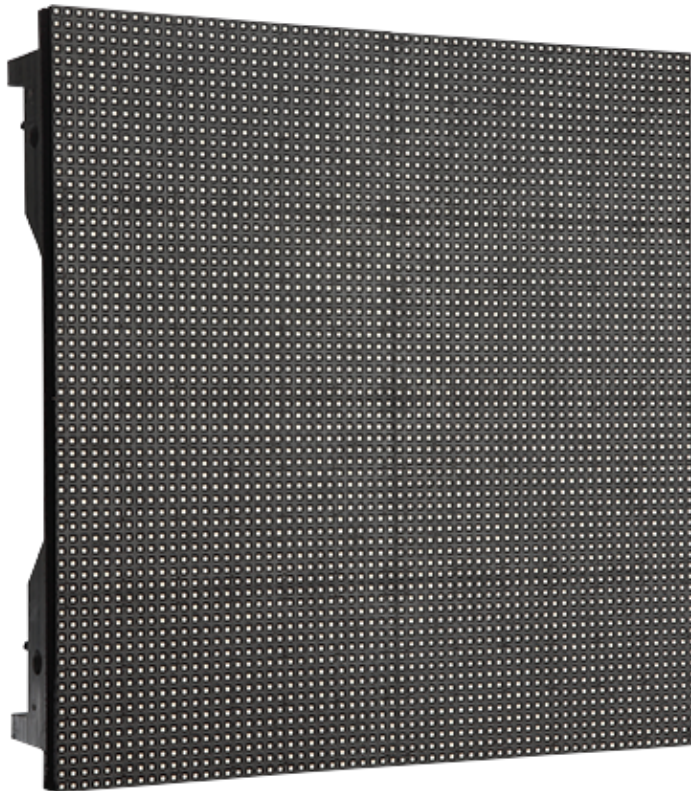

产品参数

Our GS-P7.8 is designed for outdoor use LED die cast screen. Its cabinet specially is made of aluminum die casting, which guarantee whole LED screen portable and durable use. GS-P7.8 uses Golden sea self-developed HDMI control system and is compatible to any DMX controller. Optional choice is traditional Gigabit Ethernet control system. Seamless mechanical system and easy for maintenance and high contrast levels. Support a refresh rate over 1200Hz for flicker free

application and 16-bit processing.

SPECIFICATIONS

Pixel Pitch:7.8125mm
Pixel Density:16384dot/m²
Panel Size:500x500x84mm
Panel Weigh:10.7kg
LED Type:SMD3535
Brightness: 3200CD/m²
Viewing Angle:H120 ° /V120 °
Scanning Rate:50/60Hz
Refresh Rate: 1200Hz
Contrast Level:2000:1
Gray Scale:16 Bits
Life Span:100000H
IP Rating:IP65
Max Power:600W/m²
Ave Power:300W/m²
Operating Temperature:-30 ~+50
Operating Humidity:10%-90%