



GL10P SPOT (WITH FRAMING)



Product parameters

OPTICS

Source: 950W White LED

CT: 6500K

Lamp life expectancy: 20,000H

CRI: 70 (High CRI: 90)

MOVEMENT



Pan movement: 540 ° /630 ° optional (16 bit)

Tilt movement: 270 ° (16 bit)

Advanced moving system: fast, stable and quiet, auto X/Y repositioning.

COLORS

CMY color mixing

CTO linear (2700K-6500K)

1 Color wheel: 6 interchangeable dichroic filters + open

GOBOS

1 Rotating gobo wheel: 7 interchangeable + open

1 Static gobo wheel: 7 interchangeable + open

FEATURES

Rotating prism: 4 facet prism and linear prism which can make beam shaper

Focus

Iris

Shutter: electronic, variable from 1-25Hz or random

Dimming: 0-100% linear dimming



Frost: light frost, heavy frost

Zoom: 5.7 ° - 50 ° linear

Optional High CRI Version:GL10PH

Animation wheel: special dynamic flame or water effect, etc

Framing system: full field travel with the ability to create different shapes. Rotation of $\pm 45^\circ$

DISPLAY

LCD display with battery operated for fast addressing

15 second standby auto lock

Pan/ Tilt disengage (hold MENU and ENTER button)

SOFTWARE

Upgrades: fast and convenient using uploader over DMX

Remote reset DMX address, fixture reset, sound control by DMX

Run time of LED engine and fixture

3 Control channel modes: 39/37/60CH

OTHER SPEC



Input signal isolation

Optional installed wireless receiver

Optional ArtNET control

RDM compatible

POWER

AC100-240V, 50/60HZ

DIMENSIONS AND WEIGHT

Fixture dimensions:42.4x36.8x79.7cm

Packing dimensions:

97.5x57.5x50.5cm(Carton)

78.5x58.5x93cm(Single flightcase)

Net weight: 46.3kgs

Cross weight:


52.8kgs(Carton)

87.8kgs(Single flightcase)






Colours/ Gobos

ANIMATION WHEEL: 

COLOR WHEEL: 

ROTATING GOBO WHEEL: 

Dimensions

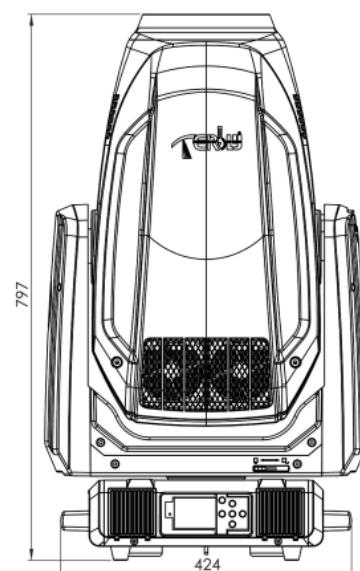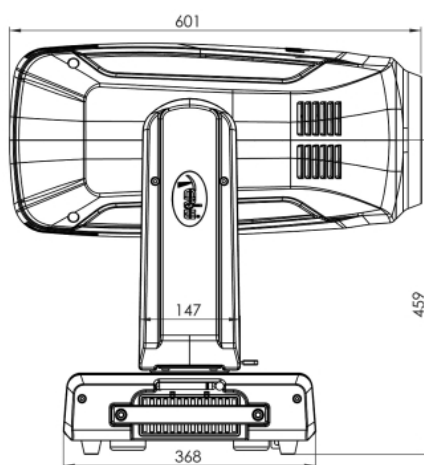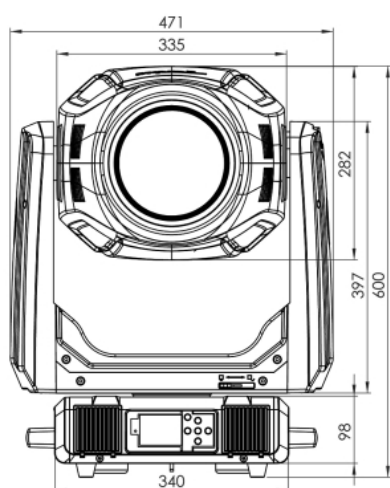


Photometrics



Min. Beam angle(5.7°)


Intensity LUX 98260 23670 10550 5989

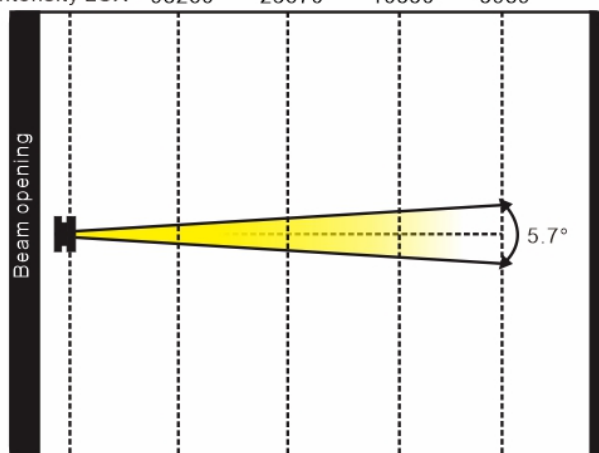

Distance(m) 5 10 15 20
Diameter(m) Φ0.5 Φ1 Φ1.5 Φ2

Max. Beam angle(50°)

Intensity LUX 3364 981 548 276

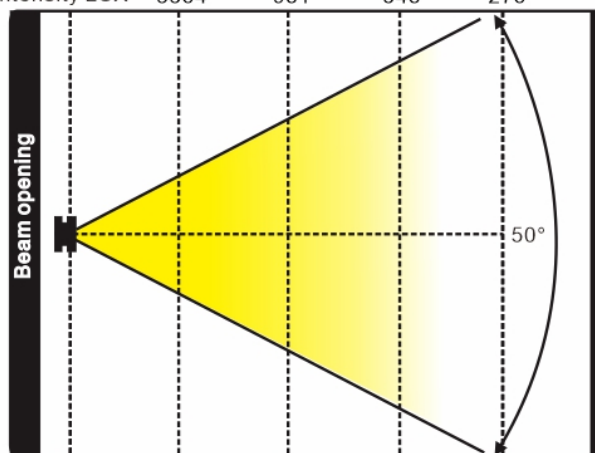

Distance(m) 5 10 15 20
Diameter(m) Φ4.66 Φ9.32 Φ13.98 Φ18.64

Errors and omissions are possible. All specifications are subject for change without prior notice.