



V5000WP WASH (WITH FRAMING)



Product parameters

Optical system

Source: OSRAM Lok-it 1800/PS

Fixture CT: 6000K

Lamp life expectancy : 750h

CRI: 90 , High CRI mode: RA up to 95, R9 up to 95

Fixture output: 59,000lm

Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning



Color system

CMY+CTO color mixing

2 Color wheels: 13 dichroic filters + open

Effects

Motorized focus

Zoom range: 5.5 ° -70 °

4 individually positionable blades with $\pm 45^\circ$ rotation of the complete framing system

Iris

Dimming: 0-100% linear dimming

Shutter: mechanical with various speed

Protection rating

IP20

Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 31/33/53CH

Control

Input signal isolation

Auto thermal protection circuit

RDM protocol

Electric parameter

AC200-240V, 50/60Hz

Power: 2000W



Dimension and weight

Product dimension: 46.7x36.8x86.5cm

Packing dimension (carton): 58.0x50.5x98.0cm

Net weight: 43.0kgs

Gross weight (carton): 49.5kgs




Colours/ Gobos

COLOR WHEEL 1: 

COLOR WHEEL 2: 

:


Dimensions

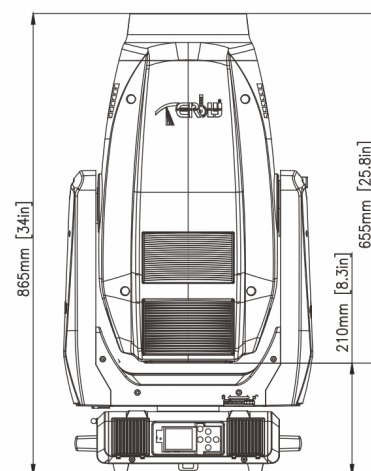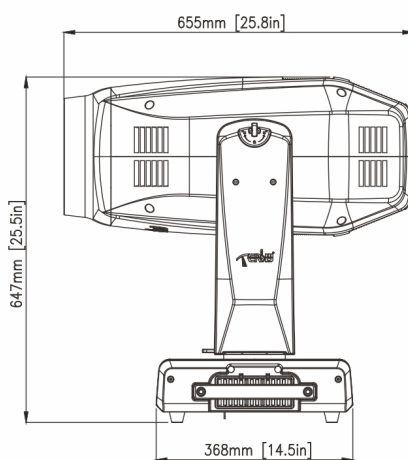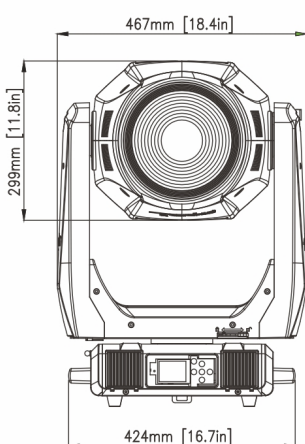




Photometrics


Intensity LUX (5.5°)

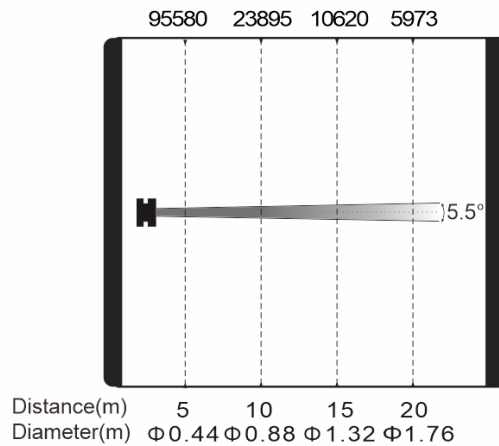


Intensity LUX (11.5°)

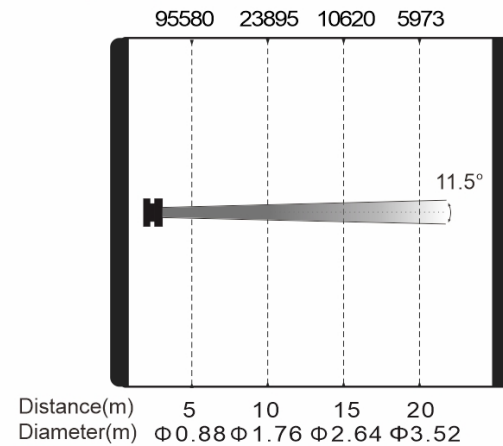

Intensity LUX (50°)

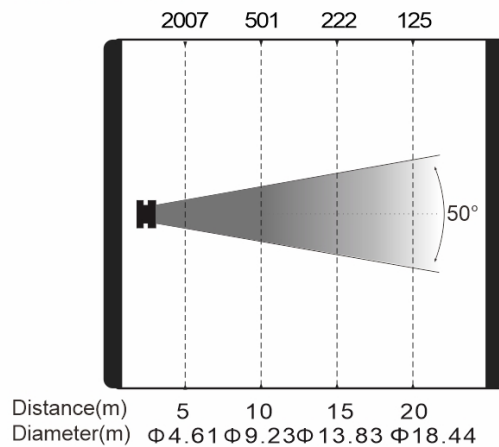

Intensity LUX (70°)

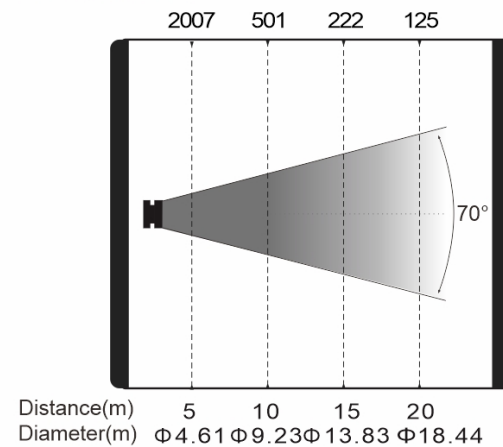

Errors and omissions are possible. All specifications are subject for change without prior notice.