



## V1500TB-ER BEAM



### Product parameters

#### OPTICS

Lamp: Philips MSR GOLD 1510 SA/DE

CT:6000 K, Life: 750H

#### MOVEMENT

Pan movement: 540 ° /630 ° optional (16 bit )

Tilt movement: 270 ° (16 bit )

Advanced moving system: fast, stable and quiet, auto X-Y repositioning

#### COLORS

CMY color mixing and speed can be adjustable

CTO color temperature linear change from 2700 -6500K



---

1 Color wheel: 8 dichroic filters +open, rainbow effect  
30 CMY+CTO+Color macros and random CMY  
“ Slot in&out ” color wheel system

## GOBOS

1 Rotating gobo wheel: 6 interchangeable, rotating, indexable, gobos+open  
1 Static gobo wheel: 7 interchangeable, indexable, gobos+open

## FEATURES

3 Control channel modes: 21/19/32 channels  
Rotating prism: 3 facets  
Focus: motorized focus  
Shutter: Variable from 1-25 flashes or random strobe  
Dimmer: 0-100% full range dimming  
Frost: extremely nice wash effect  
Beam angle: 5 ° , parallel and strong beam effect

## DISPLAY

Advanced and convenient full-color LCD touch screen, with rechargeable battery  
Locked automatically after standby for 15 seconds to prevent error; hold the button for 3 seconds to activate  
Friendly reset detection: hold MENU and ENTER button to lock pan/tilt reset, able to complete reset detection inside flight case

## SOFTWARE

7 pre-installed programs available upon selection  
Upgrades: fast and convenient through DMX cable  
Reset DMX address, remote lamp switch, reset, sound control can all be done by the console  
Running time of lamp and fixture on display for reference

## OTHER SPEC

Input signal isolation: guarantees stable signal transmission without interference  
Auto-protection at high temperature: lamp automatically switches off when



---

reaching high temperature until the fixture cools down  
Build in wireless receiver

## POWER

AC100-240V, 50/60HZ

## DIMENSIONS AND WEIGHT

Packing Dimension: 60x56x80cm

Net Weight: 33kgs

Gross Weight: 66kgs(flight case)


## Colours/ Gobos

:

:

:

## Dimensions

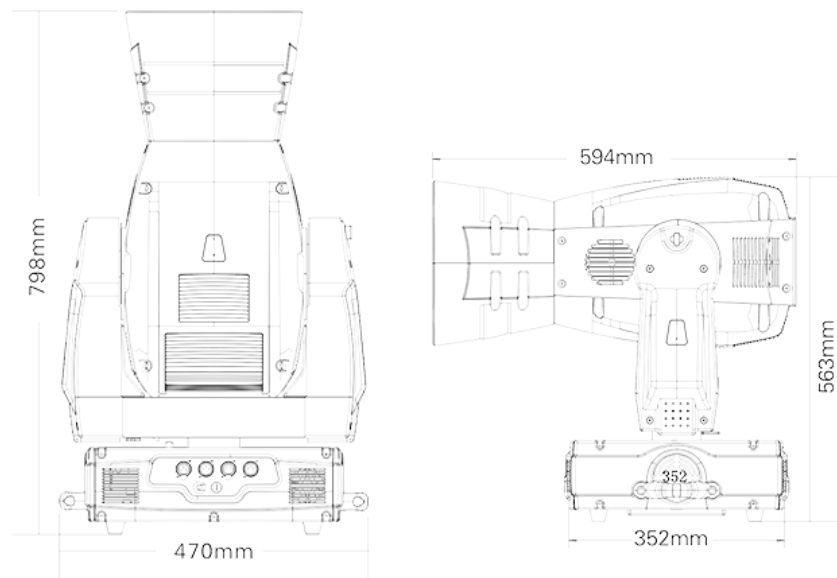


## Photometrics



Beam angle 5°

Intensity LUX

46390 25860 16130

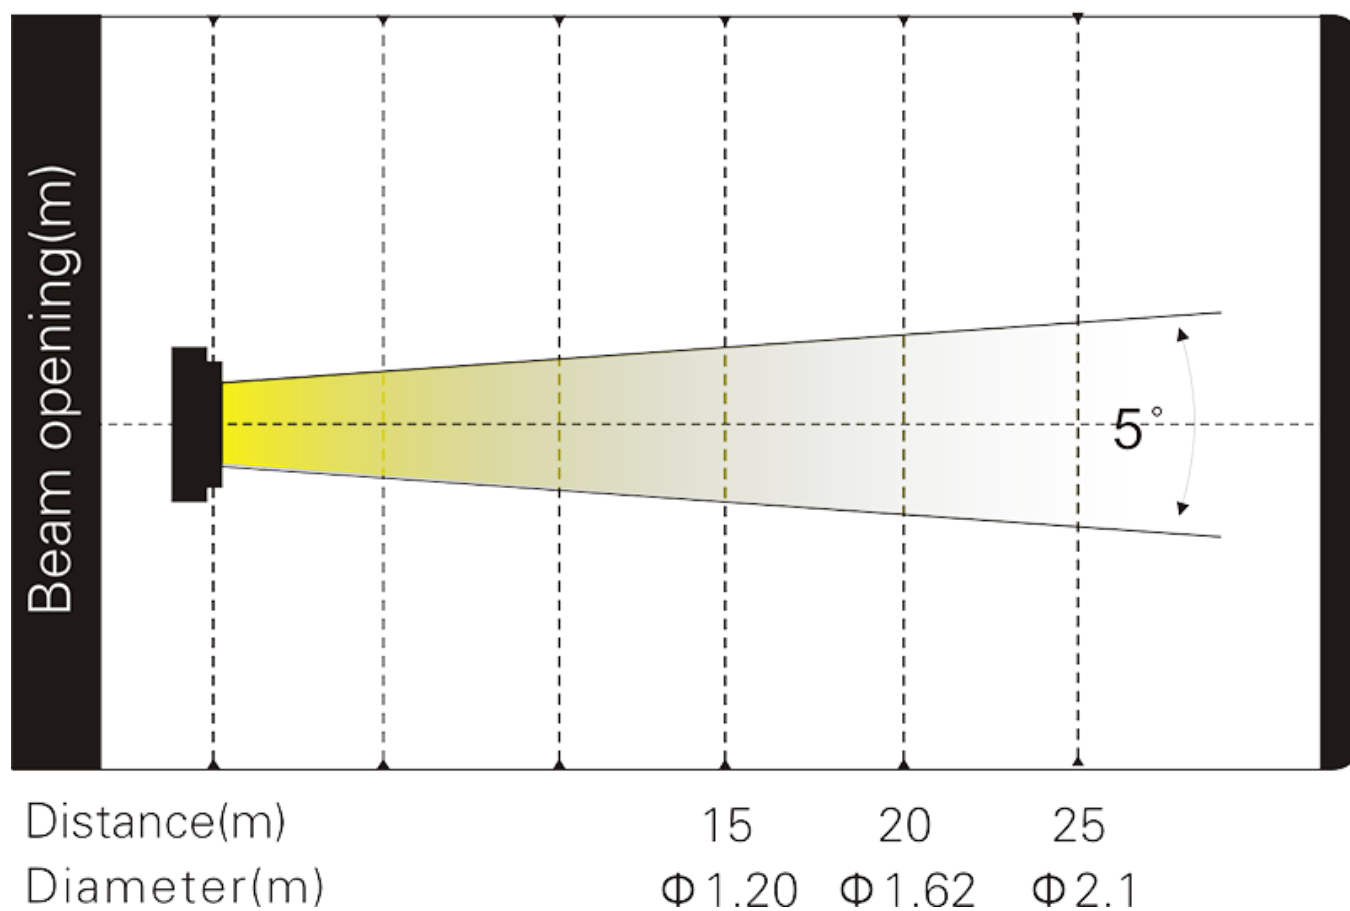

Errors and omissions are possible. All specifications are subject for change without prior notice.