



V2000P SPOT (WITH FRAMING)



Product parameters

OPTICS

Source: Philips MSR GOLD 1510 SA/DE

CT:6000 K

Life: 750H

MOVEMENT

Pan movement: 540 ° /630 ° optional (16 bit)

Tilt movement: 270 ° (16 bit)

Advanced moving system: auto repositioning, fast, quiet and smooth

COLORS

CMY color mixing



CTO linear 2700 -6500K

1 Color wheel: 7 dichroic filters +open, rainbow effect

GOBOS

1 Rotating gobo wheel: 6 interchangeable, rotating, indexable, gobos+open

1 Static gobo wheel: 7 interchangeable, indexable, gobos+open

FEATURES

Rotating prism: 3 facets

Focus

Iris

Shutter:electronic, variable from 1-25Hz or random

Dimmer: 0-100% linear dimming

Frost

Zoom: 9 ° - 50 ° linear zoom

Patented framing system: full field travel with the ability to create different shapes.

Framing rotation of 90 °

DISPLAY

Battery operated for fast addressing

15 second standby auto lock

Pan/ Tilt disengage (hold MENU and ENTER button)

SOFTWARE

Upgrades: fast and convenient using uploader over DMX

Remote reset DMX address, fixture reset, sound control by DMX

Run time of LED engine and fixture

3 Control channel modes: 36/34/57 channels

OTHER SPEC

Input signal isolation

Optional installed wireless receiver

Optional ArtNET control



RDM compatible

POWER

AC100-240V, 50/60HZ

DIMENSIONS AND WEIGHT

Packing Dimension: 87x63x48cm

Net Weight: 36kgs

Gross Weight: 40kgs


Colours/ Gobos

COLOR WHEEL: 

ROTATING GOBO WHEEL: 

STATIC GOBO WHEEL: 


Dimensions

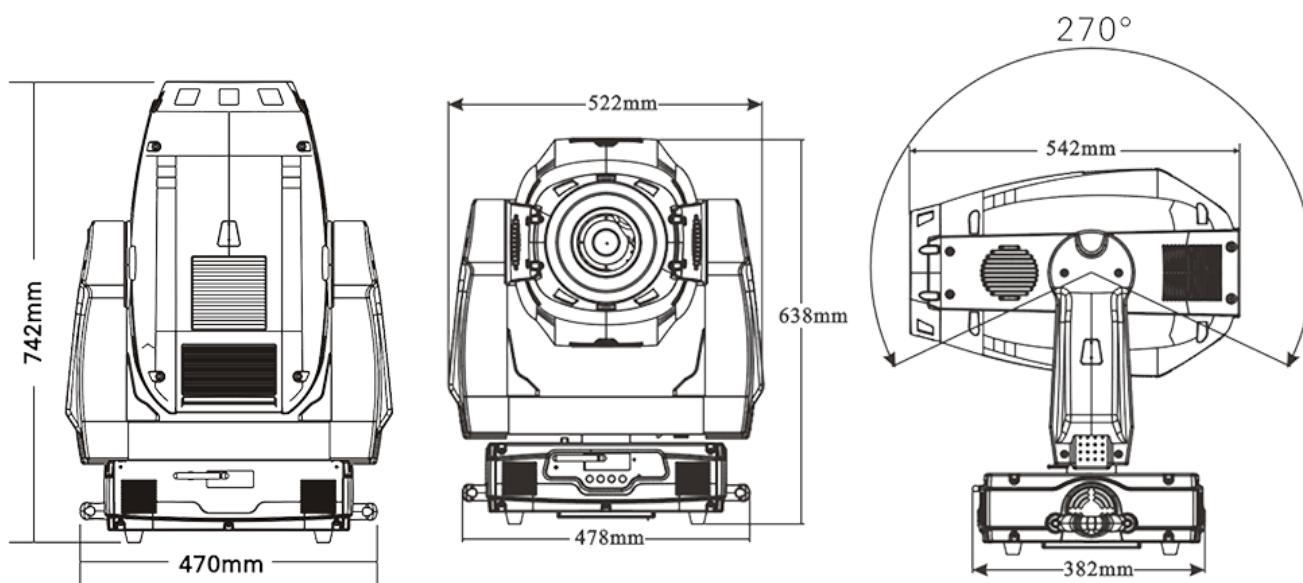

Photometrics



	2506	626	278	157
Intensity LUX(Max)	62950	15737	6994	3934

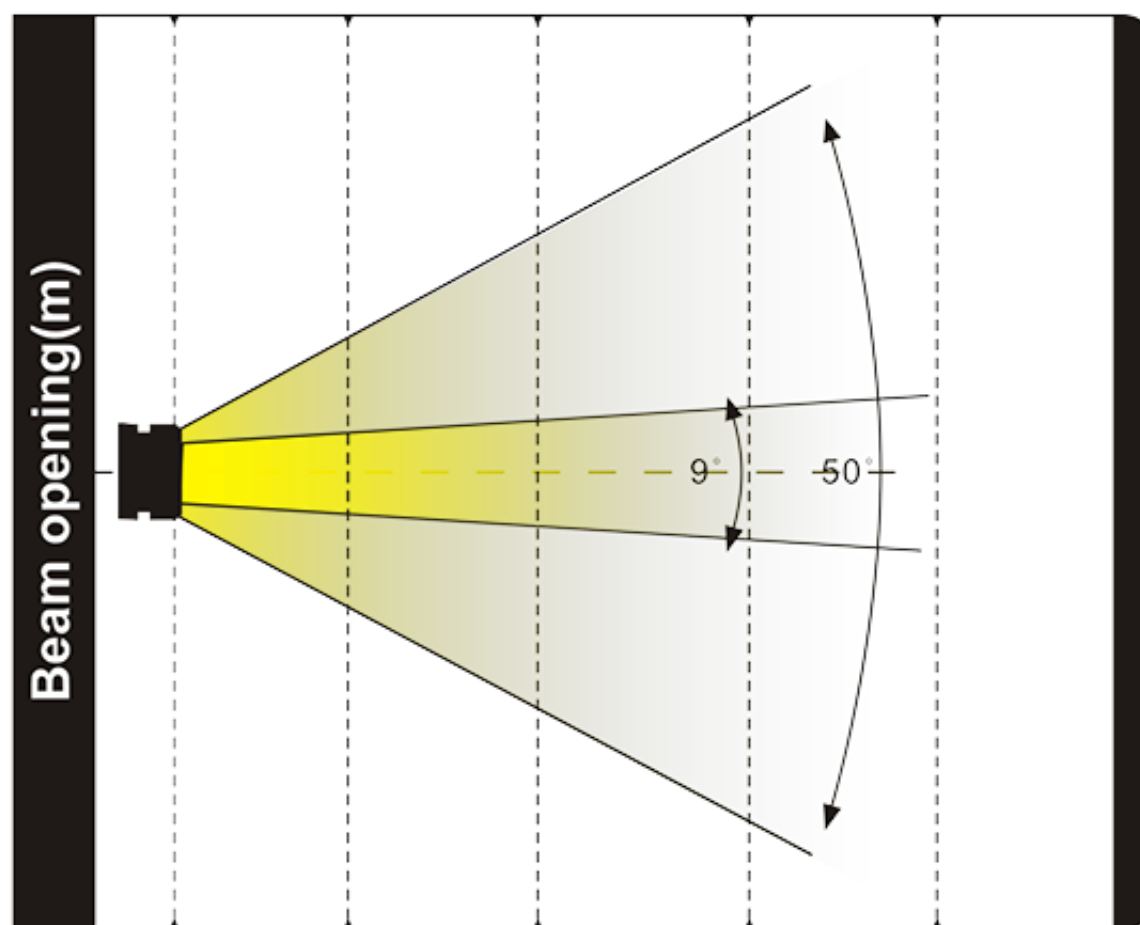

Distance(m)	5	10	15	20
9°Diameter(m)	Φ0.8	Φ1.57	Φ2.36	Φ3.15
50°Diameter(m)	Φ4.67	Φ9.31	Φ13.9	Φ18.6

Errors and omissions are possible. All specifications are subject for change without prior notice.