

### GLW1925 WASH



## **Product parameters**

### **OPTICS**

Source: 19x 25W 7-in-1 color LED

Life: >50,000H

### **MOVEMENT**

Pan movement: 540 ° /630 ° optional (16 bit)

Tilt movement: 270 ° (16 bit)

Advanced motion system: auto repositioning, fast, quiet and smooth

## **COLORS**

RGBWA+Mint+UV color mixing

Color temperature linear: 2700K to 8000K



Color temperature presets: 2700K, 3200K, 4300K, 5600K, 6500K, 8000K

Excellent color mixing and rainbow effect

#### **FEATURES**

Zoom range: 5 ° - 50 ° (Beam Angle), 8 ° - 75 ° (Field Angle)

Strobe: electronic, variable from 1-25Hz or pulse

Dimming: 0%-100% linear dimming

Ring control

GAMMA: 2.0, 2.2, 2.4, 2.6, 2.8, different blackout speed to fit different camera

Refresh rate: 900Hz - 24,000 Hz

#### **DISPLAY**

Battery operated for fast addressing
15 second standby auto lock

Pan/ Tilt disengage (hold MENU and ENTER button)

#### **SOFTWARE**

Upgrades: fast and convenient with uploader over DMX

Remote reset DMX address, fixture reset, sound control by DMX

Run time of LED engine and fixture

3 DMX channel Mode: 31/22/40 channels

3 Operational modes: DMX-512, Master/Slave & Sound Active

## **OTHER SPEC**

Input signal isolation
Optional installed wireless receiver
RDM compatible

## **POWER**

Input voltage: AC100 - 240V, 50/60 Hz

## **DIMENSION AND WEIGHT**

Packing Dimension: 67x54x42.5cm

Net Weight: 21kg



# Colours/ Gobos


:

;

:


# **Dimensions**



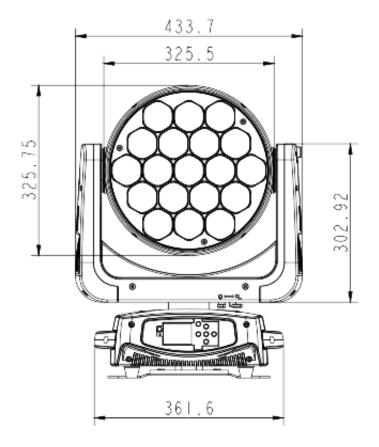

# **Photometrics**



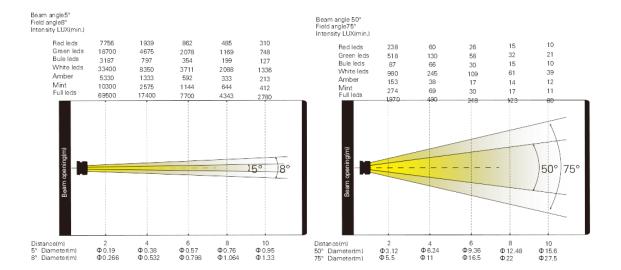

Errors and omissions are possible. All specifications are subject for change without prior notice.

5/5