OVAL48D

Product parameters

48x3W LEDs: RGBW each 12pcs

Extremely Long Life: 100,000 hr and low power consumption

4 DMX channel modes: 4/5/7/9 channels

3 operational modes: DMX-512, Master/Slave & Sound Active

Strobe effect with 1-25 flashes per second and pulse effect

General dimming and blackout for all LEDs

Protection rating: IP65, aluminium die-case

Excellent color mixing and rainbow effect

Color temperature adjustable from 2700K-7200K

4 digit LED display

Preset program: 7 built in programs can be called up via DMX controller

Beam angle: 9°, field angle: 22°

Attached an easily mounted metal holder enable to fit of optional diffractive diffusing film to get different beam angles and effects

Software upgrade: through DMX cable conveniently, quickly upgrade software

OVAL48DW: 32 x warm white, 16 x cool white

Power: AC 100-240V ,50/60HZ

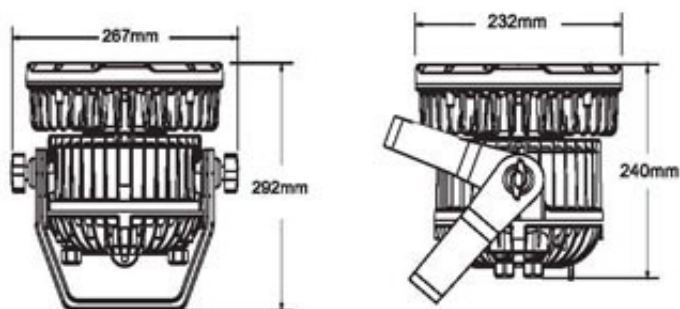Packing Dimension: 35x32x29cm

Net Weight: 7kgs

Gross Weight: 8kgs

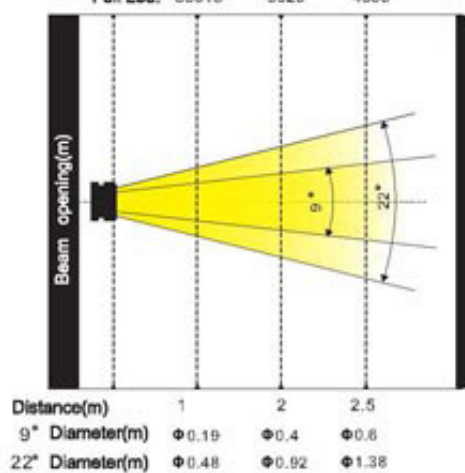## Colours/Gobos

:

:

:

Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 109, Haiyong Road, Shiqi Town, Panyu District, Guangzhou.
TEL: +86 2039966388/39966399   FAX: +86 20 39966388/39966399
Email: sales@terbly.com   Website: www.terbly.com

3 / 3

Photometrics

Beam angle 9°
Field angle 22° （LENS 15°）

Intensity LUX			
Red Led:	6180	1812	835
Green Led:	18200	5896	2775
Blue Led:	3300	1210	600
White Led:	11330	3415	1584
Full Led:	33010	9920	4560

Distance(m)	1	2	2.5
9° Diameter(m)	Φ0.19	Φ0.4	Φ0.6
22° Diameter(m)	Φ0.48	Φ0.92	Φ1.38

Errors and omissions are possible. All specifications are subject for change without prior notice.