

OVAL36FC II



Product parameters

36 x 3W LEDs: 12 x red, 9 x green, 9 x blue, 6 x white

Extremely Long Life: 100,000 hr and low power consumption

4 DMX channel modes: 4/5/7/9 channels

3 operational modes: DMX-512, Master/Slave & Sound Active

Strobe effect with 1-25 flashes per second and pulse effect

General dimming and blackout for all LEDs

Protection rating: IP65, aluminium die-case

Excellent color mixing and rainbow effect

Color temperature adjustable from 2700K-7200K

4 digit LED display

Preset program: 7 built in programs can be called up via DMX controller

Beam angle: 13 ° , field angle: 25 °

Attached an easily mounted metal holder enable to fit of optional diffractive diffusing film to get different beam angles and effects

Optional remote controller for simple control of color selection, shutter and dimmer

Software upgrade: through DMX cable conveniently, quickly upgrade software

Power: AC100-240V,50/60HZ

Packing Dimension: 31x26x35cm

Net Weight: 6kgs

Gross Weight: 7.5kgs


Colours/ Gobos

:

:

:


Dimensions

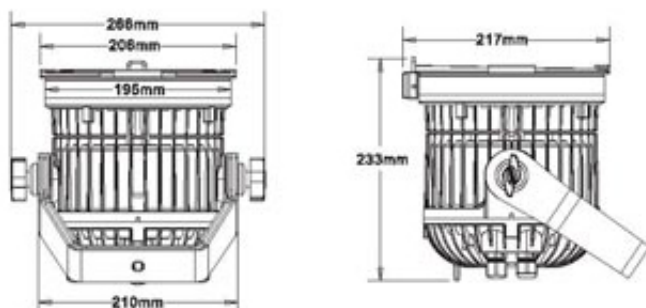

Photometrics

Beam angle 13°
Field angle 25° (LENS 15°)

Intensity LUX	Red Led:	7980	1811	790
	Green Led:	10700	2706	1224
	Blue Led:	2080	530	245
	White Led:	5722	1363	617
	Full Led:	26380	6440	2823

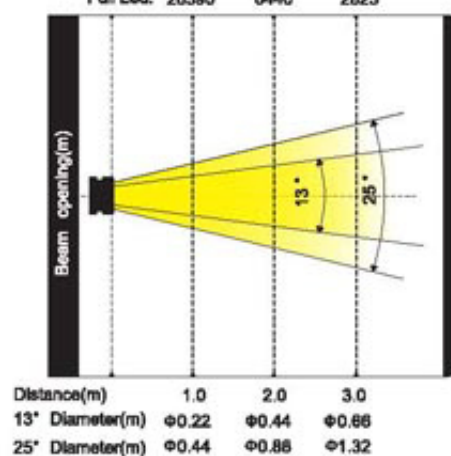

Errors and omissions are possible. All specifications are subject for change without prior notice.