

## LSC36II



### **Product parameters**

Lamp: single white 20W LED, CT:6500 K, Life: 50,000H

Control channel: 9 channels

Pan movement: 170 ° Tilt movement: 85 °

Color wheel: 8 dichroic filters +open, rainbow effect

Rotating gobo: 7 interchangeable, rotating, indexable, gobos+open

Shutter: Variable from 1-25 flashes or random strobe

Dimmer: 0-100% full range dimming

Beam angle: 11 °

8 pre-built programs can be selected

4 digit LED display: locked automatically after 15 seconds from the last button press to prevent incorrect operation, long press menu button for 3 seconds to



## activate keys again

Energy saving mode: black out can reduce 50 % power consumption; User can set in menu that within 1-99 minutes if receiving no signal, the fixture will enter hibernation status

Software upgrade: through DMX cable conveniently, quickly upgrade software


Power: AC100-240V,50/60HZ Packing Dimension: 67x37x34cm

Net Weight: 7.6kgs Gross Weight: 10kgs


$\sim$ 1		,	$\sim$	
Cole	$\cap$	rs/	(i0	nns

#### **Dimensions**



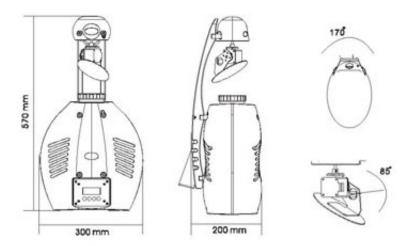

# **Photometrics**

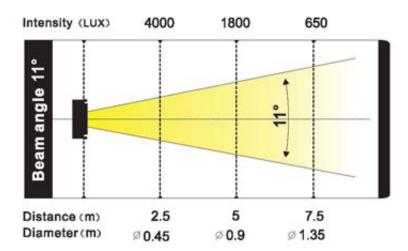

Errors and omissions are possible. All specifications are subject for change without prior notice.

3/3