

## LBM51



## **Product parameters**

Lamp: single white 50W LED, CT:6500 K, Life: 50,000H

2 DMX channel modes: 9/11 channels

Pan movement: 540 ° /630 ° optional(16 bit)

Tilt movement: 265 ° (16 bit)

Advanced moving system: fast, stable and quiet, auto X-Y repositioning

Color wheel: 7 dichroic filters +open, rainbow effect

Static gobo: 8 indexable, gobos+open

Rotating prism: 3 facets and prism macros

Shutter: Variable from 1-25 flashes or random strobe

Dimmer: 0-100% full range dimming

Beam angle: 5°

7 pre-built programs can be selected

4 digit LED display: locked automatically after 15 seconds from the last button press to prevent incorrect operation, long press menu button for 3 seconds to activate keys again.

Software upgrade: through DMX cable conveniently, quickly upgrade software. Remote DMX addressing, lamp on/off, reset, sound control switch by controller

Power: AC100-240V, 50/60HZ

Packing dimension: 58.5x41.5x 30.5 cm

Net Weight: 11.5kg Gross Weight: 16.5kg

Col	الما	rc/	$C_{\Delta}$	has
CO	lOU	15/	Gυ	มบร


:


:

•


## **Dimensions**







## **Photometrics**

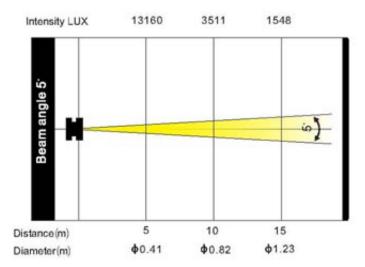

Errors and omissions are possible. All specifications are subject for change without prior notice.

3/3