

---

## Outdoor Graze ELV-G1/G4



### Product parameters

ELV-G outdoor Graze series is a high power, white LED, outdoor linear fixture. Available in 1' and 4' sections, it offers smooth linear dimming with ELV modules.

Featuring class-leading output, robust housing, LSF filter options, and a glare shield, it is the perfect option for any structure that calls for outdoor linear grazing

Color Temperature: 2700K, 3000K, 3500K, 4000K

Beam Angle: 10 ° , 40 ° , 60 ° , 10 ° x60 ° , 30 ° x60 °

Max Fixture Runs: 40 ' @120VAC/80'@240VAC+

Power Consumption: 20W(1')/ 80W(4')

Total Lumens:



---

10 ° 1' 1052@2700K 1283@3500K 1379@4000K

4' 4208@2700K 5132@3500K 5516@4000K

10 ° x60 ° 1' 948@2700K 1039@3500K 1173@4000K

4' 3792@2700K 4156@3500K 4692@4000K

Efficacy (lm/W):

10 ° 52.6@2700K/3000K, 64@3500K, 70@4000K

10 ° x60 ° 47.4@2700K/3000K, 52@3500K, 58.6@4000K

CRI: >80

Finish: Anodized Brushed Aluminum (Black or White - Special Order Only)

Housing: Aluminum; Clear Polycarbonate Lens

Operating Temperature: -20 ° C to 45 ° C

Operating Voltage: 95-135V / 200-300V

Dimming: TRIAC + ELV

Fixture Connectors: Integral, 3 Pin Male & Female Connector

Rating: IP 65

Weight: 1' 1.4kg 4' 5.4kg

Dimensions: 74.1mmx98.5mmx305mm/1219.2mm


Colours/ Gobos

:

:

:

# Dimensions

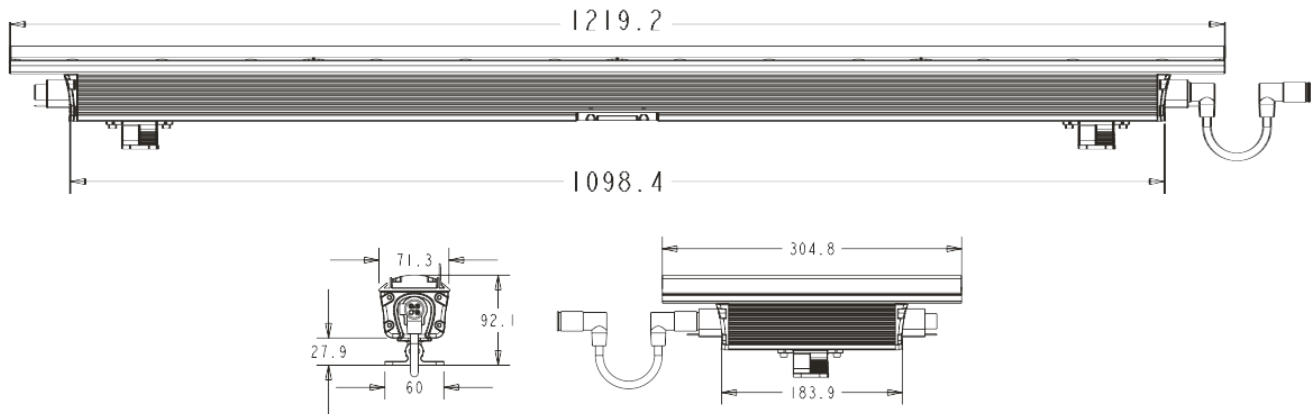

Errors and omissions are possible. All specifications are subject for change without prior notice.