




CABINET SCREEN GS-P6.25



Golden sea professional and creative LED die cast screen series are ideal for stage, event and rental application.

IP 20

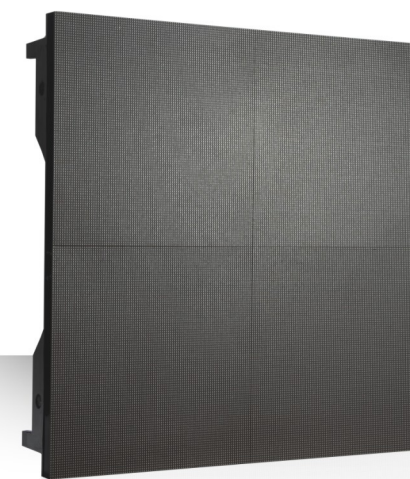


Our **GS-P6.25** is designed for indoor use LED die cast screen. Its cabinet specially is made of aluminum die casting, which guarantee whole LED screen portable and durable use. GS-P6.25 uses Golden sea self-developed HDMI control system and is compatible to any DMX controller. Optional choice is traditional Gigabit Ethernet control system. Seamless mechanical system and easy for maintenance and high contrast levels. Support a refresh rate over 2000Hz for flicker free application and 16-bit processing.

SPECIFICATIONS

Pixel Pitch	6.25mm
Pixel Density	25600dot/ m2
Panel Size	500x 500x84mm
Panel Weigh	<10kg
LED Type	SMD3528
Brightness	≥2000CD/m2
Viewing Angle	H120°/ V120°
Scanning Rate	50/60Hz
Refresh Rate	≥ 2000Hz
Contrast Level	2000:1
Gray Scale	16 Bits
Life Span	100000h
IP Rating	IP20
Max Power	640W/m2
Ave Power	350W/m2
Operating Temperature	-20°C~ +45°C
Operating Humidity	5%-95%

Connection

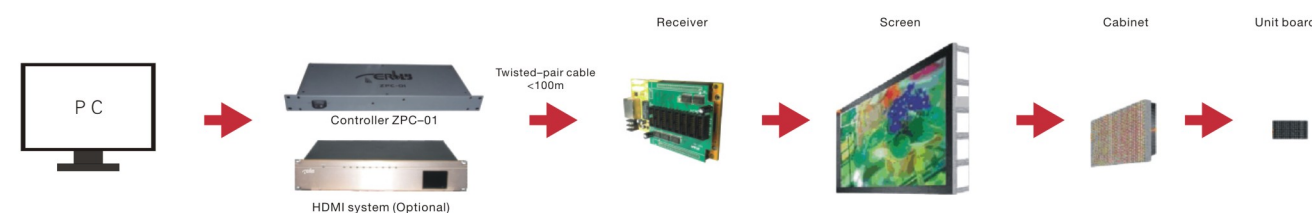

* Errors and emissions for every information given in this catalogue is expected. All information is subject to change without prior notice.