Outdoor Graze ELV-G1/G4



Product parameters

ELV-G outdoor Graze series is a high power, white LED, outdoor linear fixture. Available in 1' and 4' sections, it offers smooth linear dimming with ELV modules.
Featuring class-leading output, robust housing, LSF filter options, and a glare shield,
it is the perfect option for any structure that calls for outdoor linear grazing

Color Temperature: 2700K, 3000K, 3500K, 4000K
Beam Angle: 10 ° , 40 ° , 60 ° , 10 ° x60 ° , 30 ° x60 °
Max Fixture Runs: 40 ’ @120VAC/80'@240VAC+
Power Consumption: 20W(1')/ 80W(4')
Total Lumens:

10 ° 1' 1052@2700K 1283@3500K 1379@4000K
4' 4208@2700K 5132@3500K 5516@4000K
10 ° x60 ° 1' 948@2700K 1039@3500K 1173@4000K
4' 3792@2700K 4156@3500K 4692@4000K
Efficacy (lm/W):
10 ° 52.6@2700K/3000K, 64@3500K, 70@4000K

10 ° x60 ° 47.4@2700K/3000K, 52@3500K, 58.6@4000K
CRI: >80
Finish: Anodized Brushed Aluminum (Black or White - Special Order Only)
Housing: Aluminum; Clear Polycarbonate Lens
Operating Temperature: -20 ° C to 45 ° C
Operating Voltage: 95-135V / 200-300V
Dimming: TRIAC + ELV
Fixture Connectors:Integral, 3 Pin Male & Female Connector
Rating: IP 65
Weight: 1' 1.4kg 4' 5.4kg
Dimensions: 74.1mmx98.5mmx305mm/1219.2mm

Colours/ Gobos


:

:

:

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Dimensions

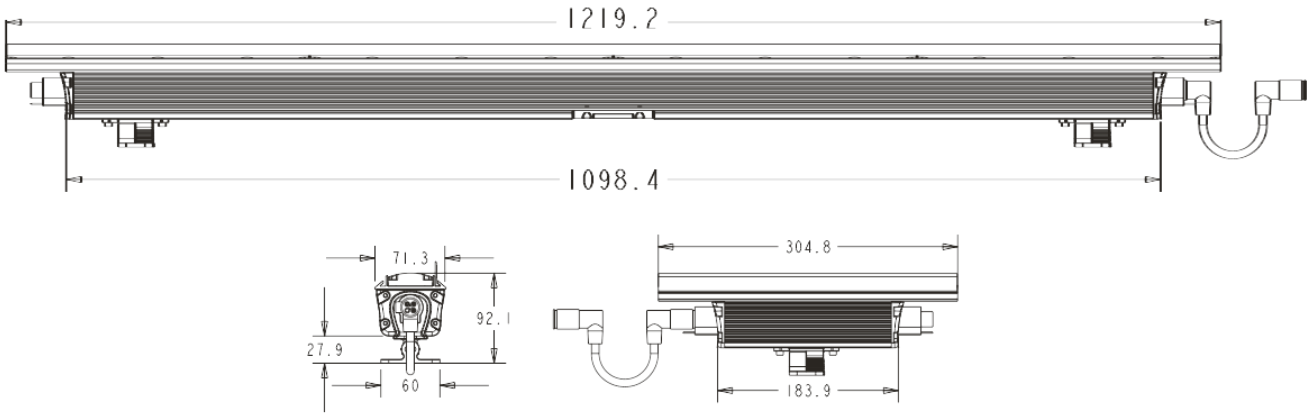

Errors and omissions are possible. All specifications are subject for change without prior notice.