
Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

CABINET SCREEN GS-P7.8

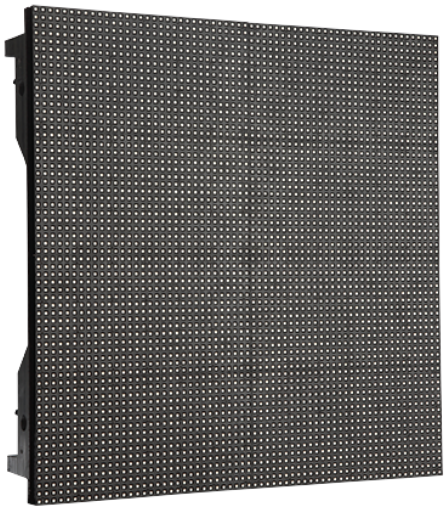

Product parameters

Our GS-P7.8 is designed for outdoor use LED die cast screen. Its cabinet specially is made of aluminum die casting, which guarantee whole LED screen portable and durabe use. GS-P7.8 uses Golden sea self-developed HDMI control system and is compatible to any DMX controller. Optional choice is traditional Gigabit Ethernet control system. Seamless mechanical system and easy for maintenance and high contrast levels. Support a refresh rate over 1200Hz for flicker free application and 16-bit processing.

SPECIFICATIONS

Pixel Pitch:7.8125mm
Pixel Density:16384dot/m2

Panel Size:500x500x84mm
Panel Weigh:10.7kg
LED Type:SMD3535
Brightness:≥3200CD/m2
Viewing Angle:H120 ° /V120 °
Scaning Rate:50/60Hz
Refresh Rate:≥1200Hz
Contrast Level:2000:1
Gray Scale:16 Bits
Life Span:100000H
IP Rating:IP65
Max Power:600W/m2
Ave Power:300W/m2
Operating Temperature:-30°C~+50°C
Operating Humidity:10%-90%

Colours/ Gobos

:

:

:

Errors and omissions are possible. All specifications are subject for change without prior notice.