
# CREATIVE CURTAIN SCREEN GS-P40

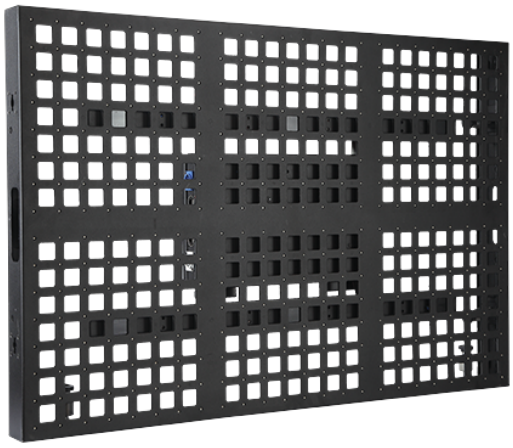

## Product parameters

Our Curtain Series LED Display is with specially designed structure making it lightweight, fast installation, cost effective and moderate brightness. It is not only perfect for stages, bars, lobbies in hotels and restaurant, but also suitable for glass curtain of buildings. As for functions of P40, multimedia video as well as all kinds of light effect designed by professional designers is able to be performed charmingly. “ Creative Curtain Series ” uses of RGB 3 in 1 — Red,Green and Blue lights are evenly distributed. This design allows fast and easy installation and maintenance from the front and back.

SPECIFICATIONS

Pixel Pitch:40mm

Pixel Density:625dot/m2
Panel Size:960x640x60mm
Panel Weigh:＜18.5kg
LED Type:SMD(3528RGB 3 in 1)
Brightness:800CD/m2
Viewing Angle:H140 ° /V110 °
Scaning Rate:50/60 Hz
Refresh Rate:≥600 Hz
Contrast Level:2000:1
Gray Scale:14 Bits
Life Span:100000H
IP Rating:IP20
Max Power:180W/m2
Ave Power:130W/m2
Operating Temperature:-10°C~+45°C
Operating Humidity:5%-95%

## Colours/ Gobos


:

:

:

## Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

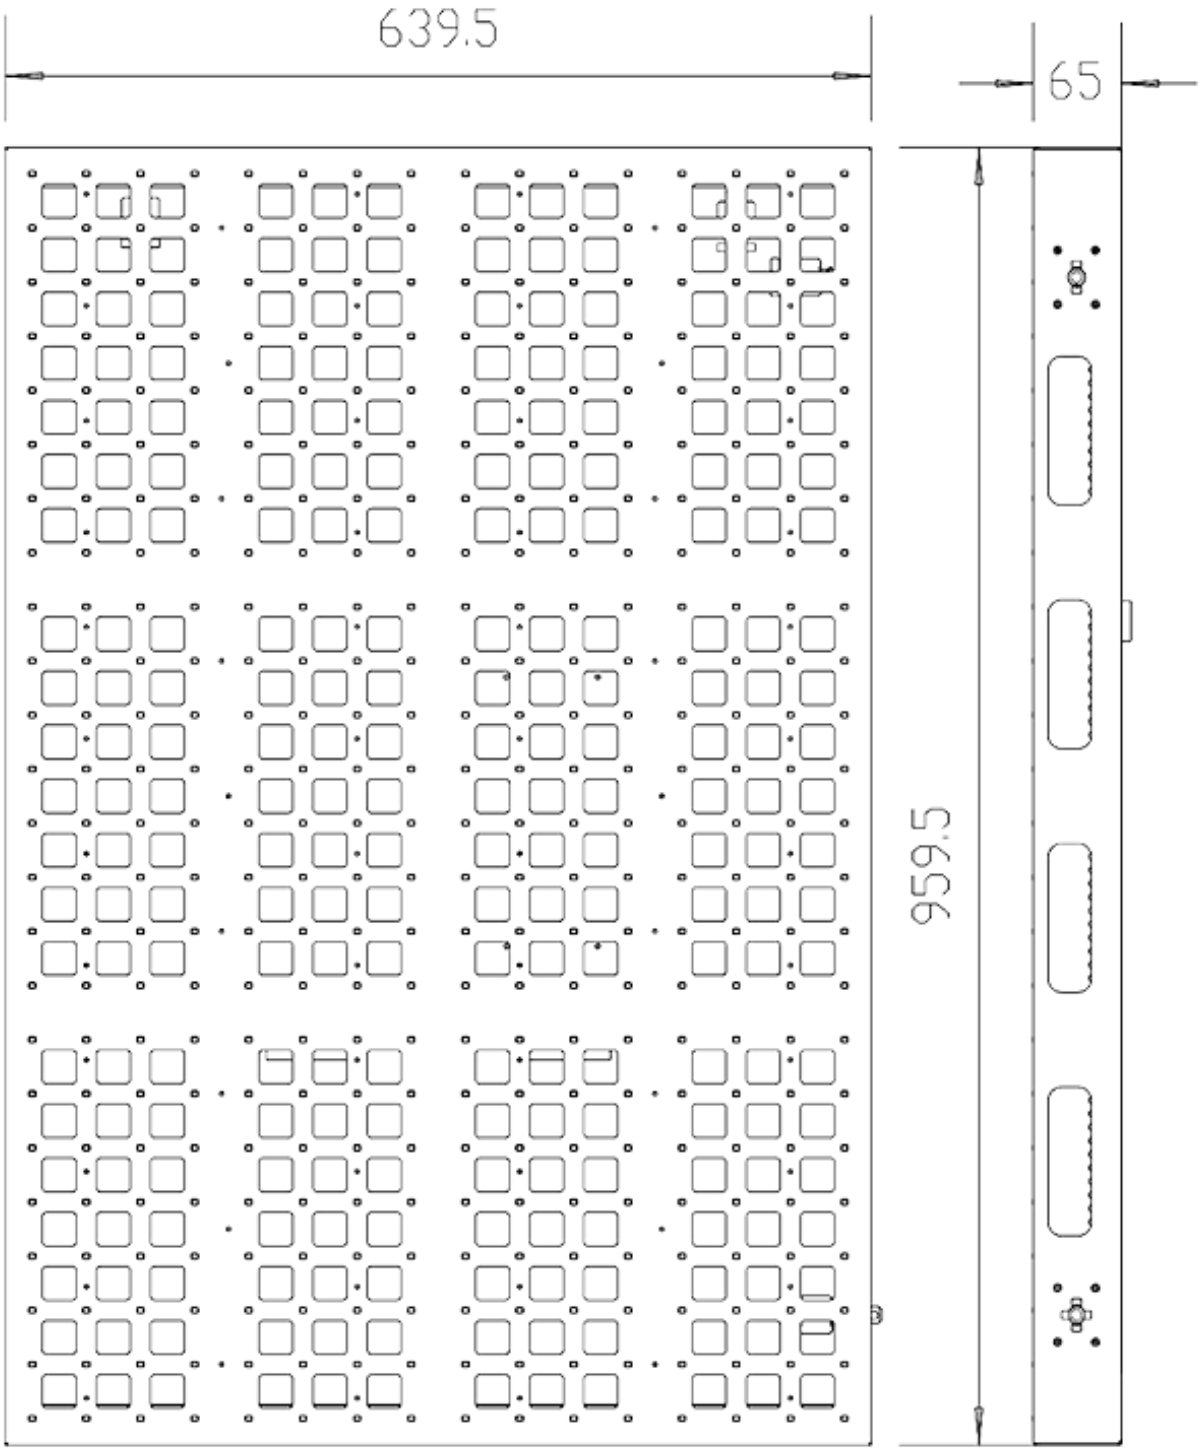


Errors and omissions are possible. All specifications are subject for change without prior notice.