

---

## V4000WP WASH (WITH FRAMING)



### Product parameters

#### Optical system

Source: OSRAM Lok-it! 1400W/PS

Fixture CT: 6400K

Lamp life expectancy : 750h

CRI: up to 95

Fixture output: 35,200lm

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning



---

## Color system

CMY+RGB+CTO color mixing

2 Color wheels: each with 6 interchangeable dichroic filters + open

## Effects

Motorized focus

Zoom range: 11 ° -60 °

4 individually positionable blades with  $\pm 45^\circ$  rotation of the complete framing system

Iris

Dimming: 0-100% linear dimming

Shutter: mechanical with various speed

## Protection rating

IP20

## Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

## Software

Upgrade with DMX and USB as optional

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 33/31/55CH

## Control

Input signal isolation

Auto thermal protection circuit

Art-Net control

RDM protocol

## Electric parameter

AC100-240V, 50/60Hz



Power: 1800W

### Dimension and weight


Product dimension: 467x368x792mm

Packing dimension (carton): 945x580x505mm

Net weight: 43kg

Gross weight (carton): 49.5kg


### Colours/ Gobos

COLOR WHEEL 1: 

COLOR WHEEL 2: 



:

### Dimensions

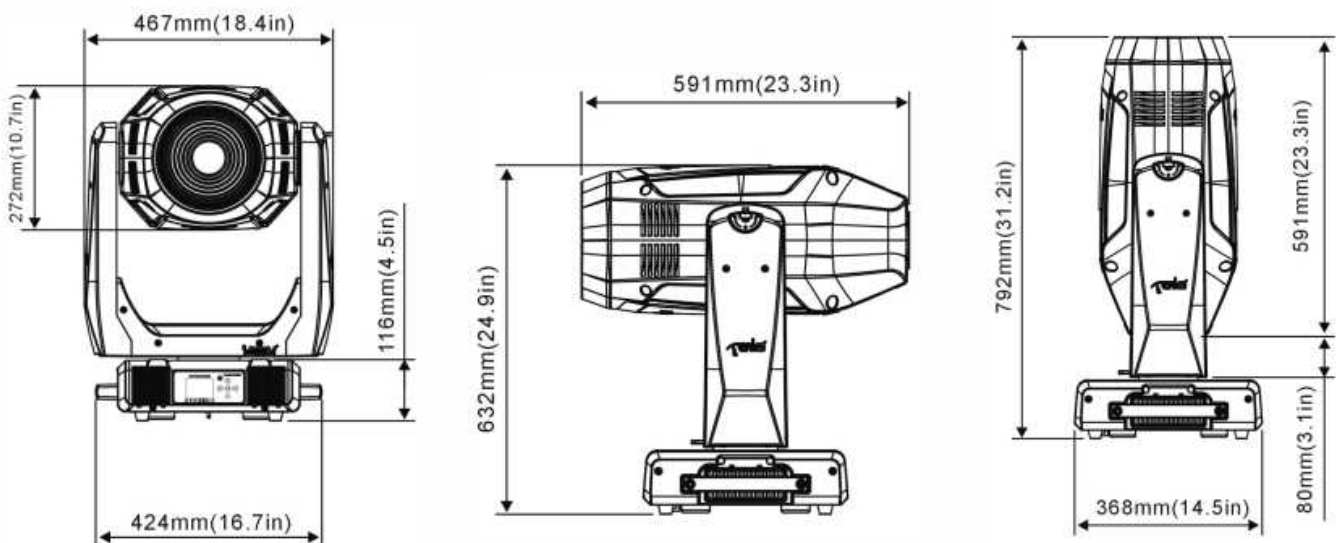



## Photometrics

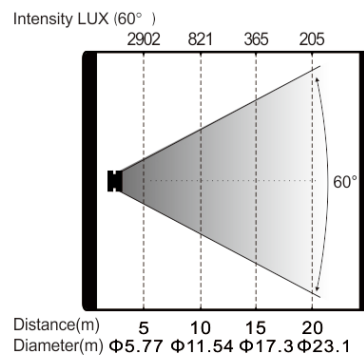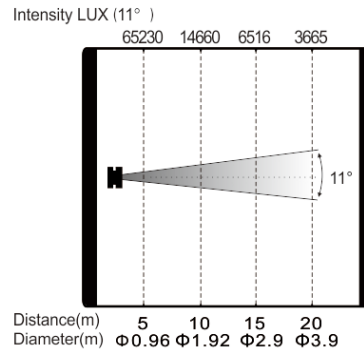

Errors and omissions are possible. All specifications are subject for change without prior notice.