
V4000WP WASH (WITH FRAMING)



Product parameters

Optical system

Source: OSRAM Lok-it! 1400W/PS

Fixture CT: 6400K

Lamp life expectancy : 750h

CRI: up to 95

Fixture output: 35,200lm

Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning



Color system

CMY+RGB+CTO color mixing

2 Color wheels: each with 6 interchangeable dichroic filters + open

Effects

Motorized focus

Zoom range: 11 ° -60 °

4 individually positionable blades with $\pm 45^\circ$ rotation of the complete framing system

Iris

Dimming: 0-100% linear dimming

Shutter: mechanical with various speed

Protection rating

IP20

Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

Software

Upgrade with DMX and USB as optional

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 33/31/55CH

Control

Input signal isolation

Auto thermal protection circuit

Art-Net control

RDM protocol

Electric parameter

AC100-240V, 50/60Hz



Power: 1800W

Dimension and weight


Product dimension: 467x368x792mm


Packing dimension (carton): 945x580x505mm

Net weight: 43kg

Gross weight (carton): 49.5kg


Colours/ Gobos

COLOR WHEEL 1: 

COLOR WHEEL 2: 



:

Dimensions

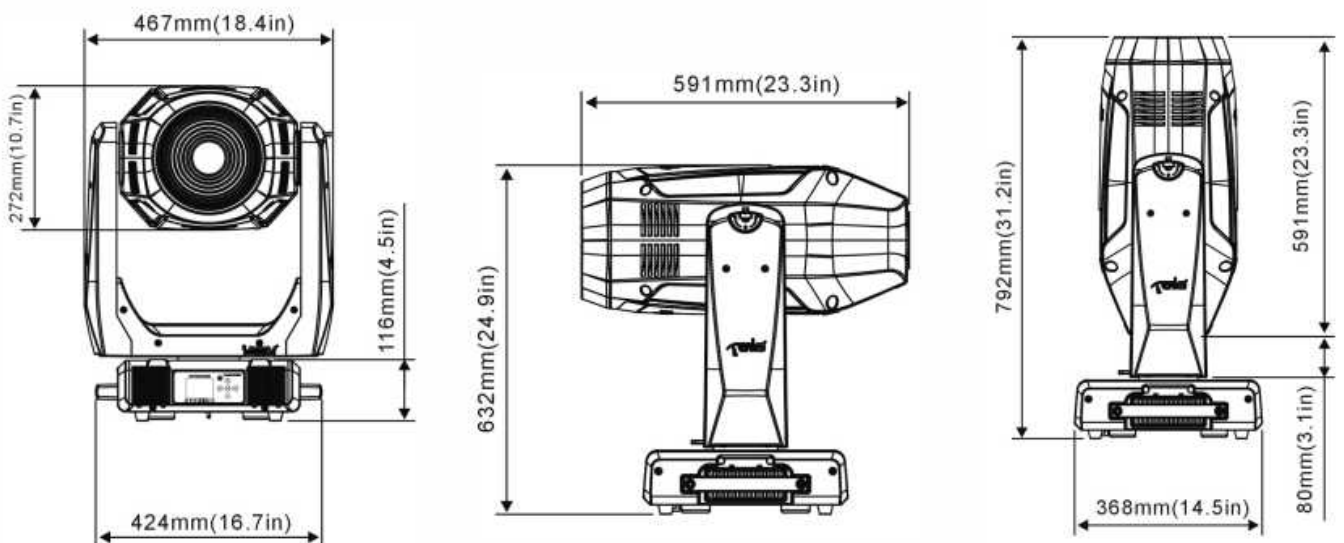



Photometrics

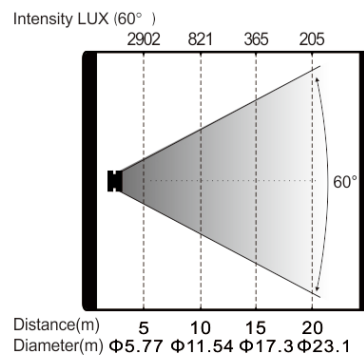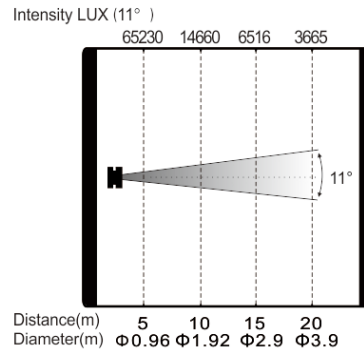

Errors and omissions are possible. All specifications are subject for change without prior notice.