

## GL3WP WASH WITH FRAMING



### Product parameters

#### Optical system

Source: 380W White LED

Fixture CT: 6000K

Light source life expectancy : 20,000h

CRI: up to 95

Fixture Output: 15800lm (Plano convex glass lens), 13800lm (Fresnel)

Optional lens: Plano convex glass lens or Fresnel

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning

## Color system

CMY+CTO color mixing

1 Color wheel: 7 dichroic filters +open

## Effects

Motorized focus

Zoom range: 17 ° - 63 °

Frost

4 individually positionable blades with  $\pm 45^\circ$  rotation of the complete framing system

Dimming: 0-100% linear dimming

Strobe: electronic, variable from 1-25Hz or pulse

## Protection rating

IP20

## Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

## Software

Upgrade with DMX and USB as optional

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 26/28/41CH

## Control

Input signal isolation

Auto thermal protection circuit

Optional installed wireless receiver

Art-Net control

RDM protocol

## Electric parameter

AC100-240V, 50/60Hz

Power: 600W

## Dimension and weight

Product dimension: 407x326x677mm

Packing dimension (double flightcase): 965x575x930mm

Net weight: 25kg

Gross weight (double flightcase): 104.5kg

## Colours/ Gobos


COLOUR WHEEL:





:

:

## Dimensions

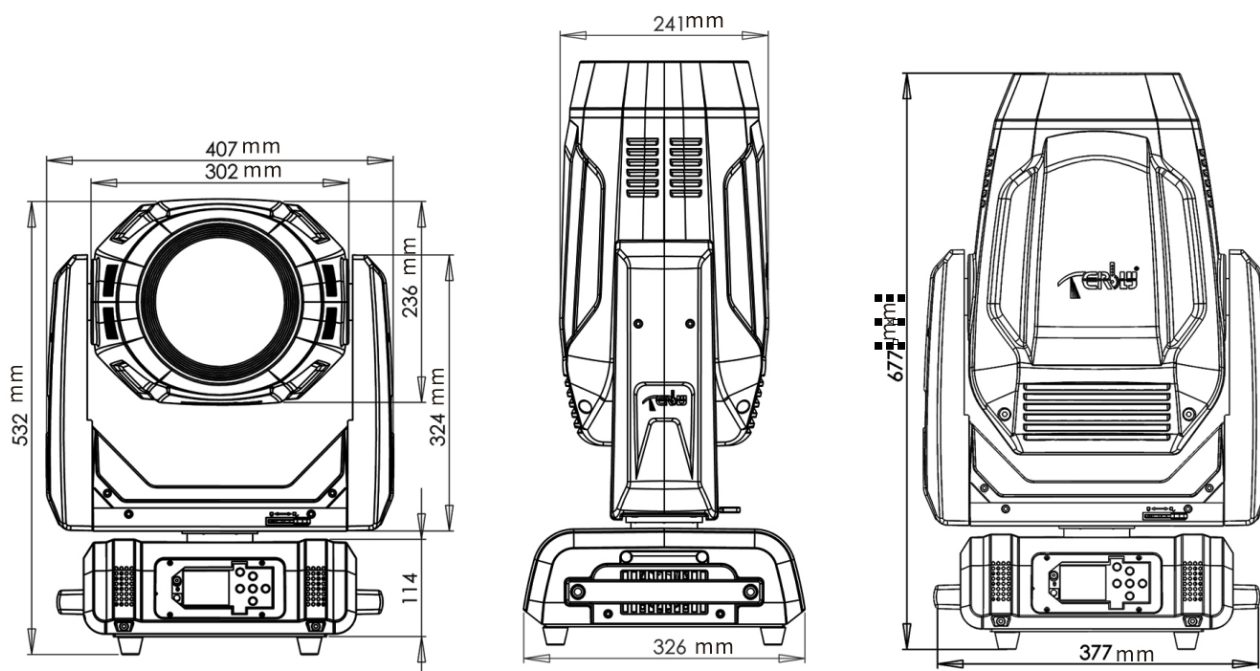

## Photometrics

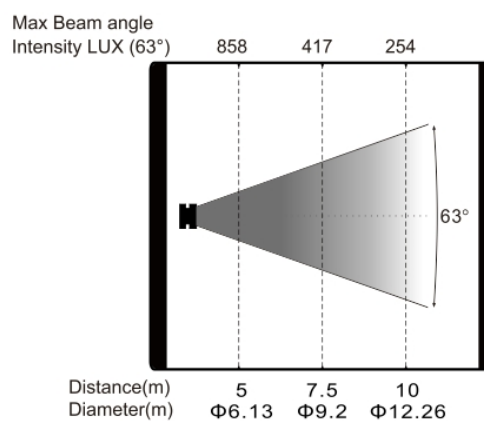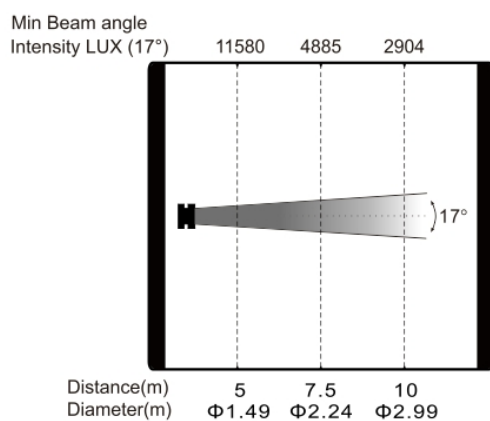

Errors and omissions are possible. All specifications are subject for change without prior notice.