
G7B NOVA BEAM



Product parameters

Optical system

Source: Philips MSD Platinum Flex 300, 380W

Fixture CT: 7300K

Life span : 6000h

Fixture output: 12,000lm

Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning

Color system



CMY color mixing

1 Color wheel: 14 dichroic filters +open

Gobo system

1 Static gobo wheel: 15 gobos + open

Effects

Motorized focus

Beam angle: 2 °

2 Rotating prisms: 4 linear + 16 facet,dynamic prism morph

Frost

Dimming: 0%-100% linear dimming

Shutter: mechanical with various speed

Protection rating

IP20

Display

Battery operated for fast addressing,15 seconds standby auto lock

Pan/ Tilt disengage (hold Left arrow and Right arrow buttons)

Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 19/17/27CH

Control

Input signal isolation

Auto thermal protection circuit

Optional installed wireless receiver

RDM protocol

Electric parameter



AC200-240V, 50/60Hz

Power: 550W

Dimension and weight

Product dimension: 38.6x30.2x60.4cm

Packing dimension (carton): 71.5x50.0x43.5cm

Net weight: 21.0kgs

Gross weight (carton): 26.5kgs




Colours/ Gobos

COLOUR WHEEL: 


STATIC GOBO WHEEL: 


:

Dimensions

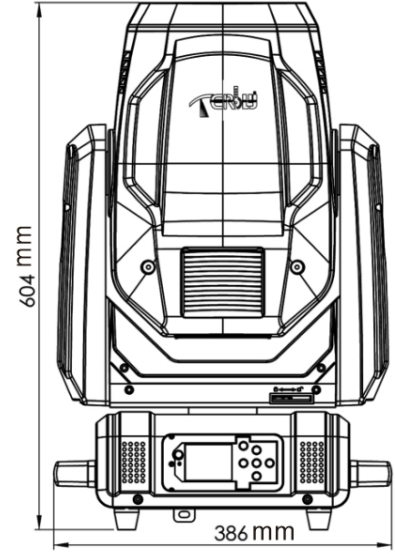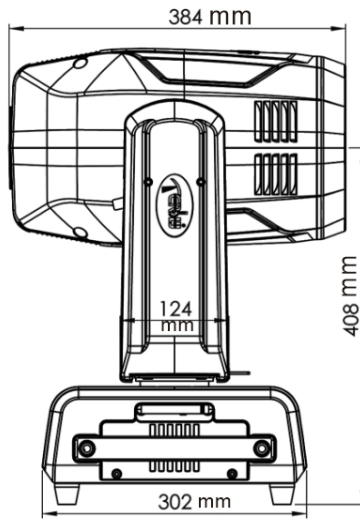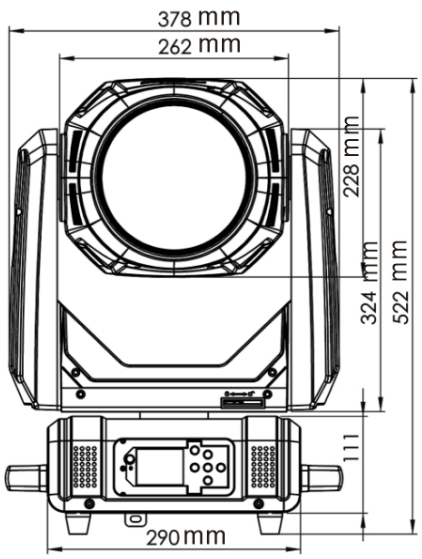

Photometrics

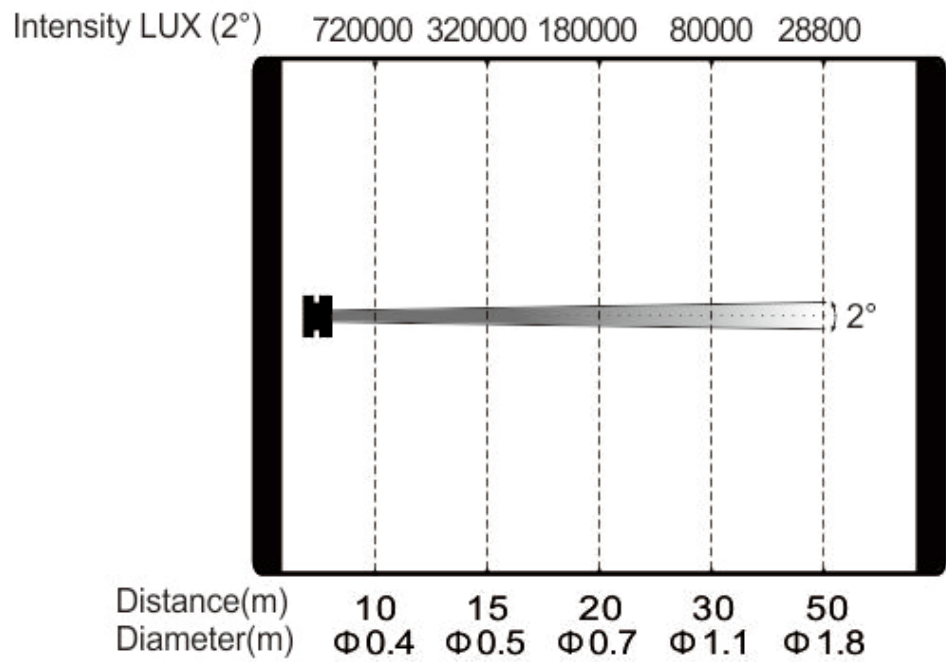

Errors and omissions are possible. All specifications are subject for change without prior notice.