

---

## G7B NOVA IP BEAM



### Product parameters

#### Optical system

Source: Philips MSD Platinum Flex 300S, 380W

Fixture CT: 6800K

Life span : 6000h

Luminance: 183400lux@20m

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning

#### Color system



---

## CMY color mixing

1 Color wheel: 14 dichroic filters +open

## Gobo system

1 Static gobo wheel: 15 gobos + open

## Effects

Motorized focus

Beam angle: 2 °

2 Rotating prisms:16 facet + 4 linear prism, two prisms can be morphed

Frost

Dimming: 0%-100% linear dimming

Shutter: mechanical with various speed

## Protection rating

IP65

## Display

Battery operated for fast addressing,15 seconds standby auto lock

Pan/ Tilt disengage (hold MENU and ENTER button)

## Software

Upgrade with DMX

Remote reset DMX address, lamp control, fixture reset by DMX

Run time of light source and fixture

3 Control channel modes: 19/17/27CH

## Control

Input signal isolation

Auto thermal protection circuit

Optional installed wireless receiver

RDM protocol

## Electric parameter



AC200-240V, 50/60Hz

Power: 550W

### Dimension and weight

Product dimension: 44.4x33.2x74.2cm

Packing dimension (carton): 56.0x46.5x86.5cm

Net weight: 37.98kgs

Gross weight (carton): 44kgs

### Colours/ Gobos




COLOUR WHEEL: 

STATIC GOBO WHEEL: 



:


### Dimensions

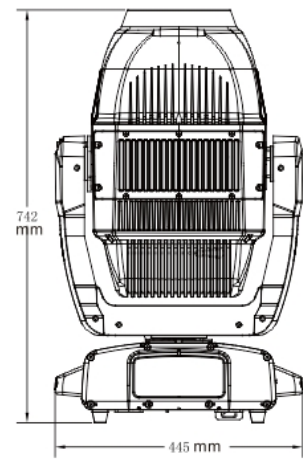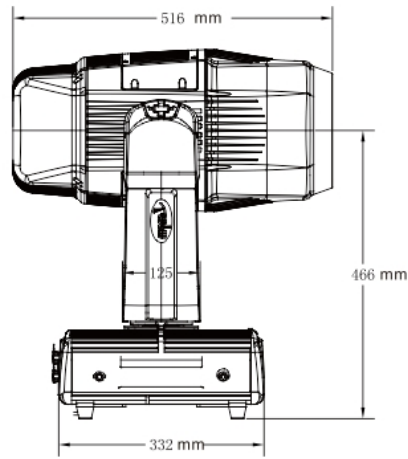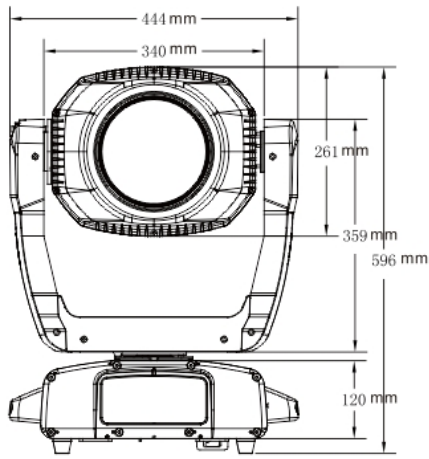

## Photometrics



Intensity LUX (2°) 733600 326044 183400 81511 29344

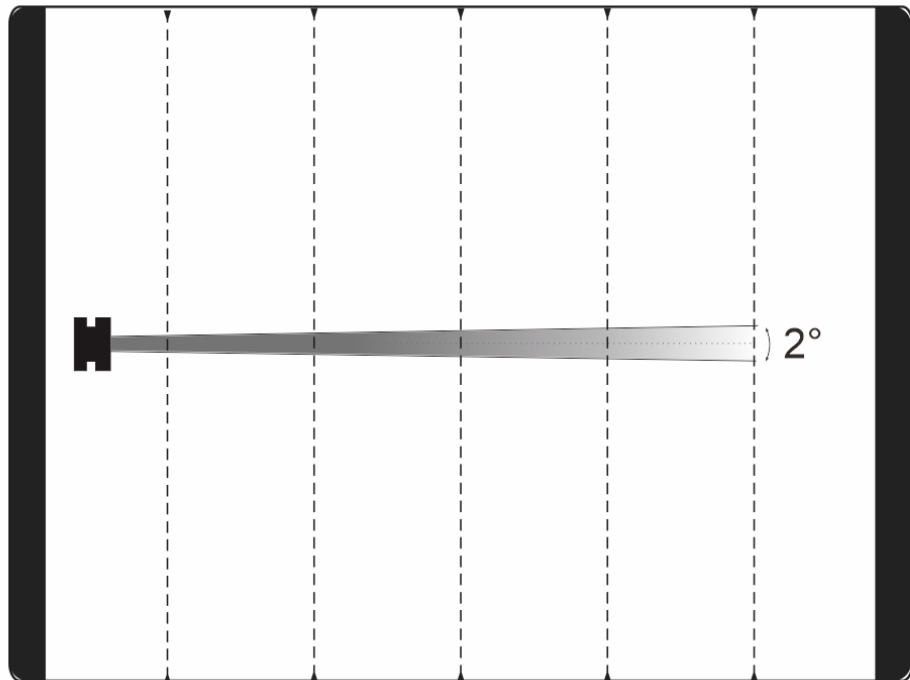

Distance(m)	10	15	20	30	50
Diameter(m)	Φ 0.36	Φ 0.54	Φ 0.72	Φ 1.08	Φ 1.8

Errors and omissions are possible. All specifications are subject for change without prior notice.