

## S380B IP BEAM



### Product parameters

#### Optical system

Source: Philips MSD Platinum Flex 300, 380W

Fixture CT: 6500K

Light source life expectancy : 6000 hours Average Light Source Life\*

\*Testing conditions in the lab may differ based on various factors.

Illuminance: 160000lux@20m

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning

## Color system

### CMY color mixing

1 Color wheel: 14 dichroic filters + open

## Gobo system

1 Static gobo wheel: 15 gobos + open

## Effects

### Motorized focus

Beam angle: 2 °

2 Rotating prisms: 4 linear + 16 facet, dynamic prism morph, indexable with macros

### Frost

Dimming: 0-100% linear dimming

Shutter: mechanical with various speed

## Protection rating

IP66

## Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

## Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 19/17/27CH

Auto thermal protection circuit

## Control

Input signal isolation

RDM protocol

## Electric parameter

AC200-240V, 50/60Hz

Power: 550W

## Dimension and weight

Product dimension: 468x370x718mm



Packing dimension (carton): 865x560x465mm

Net weight: 37kg

Gross weight (carton): 42kg


## Colours/ Gobos

COLOR WHEEL: 

STATIC GOBO WHEEL:   


:


## Dimensions

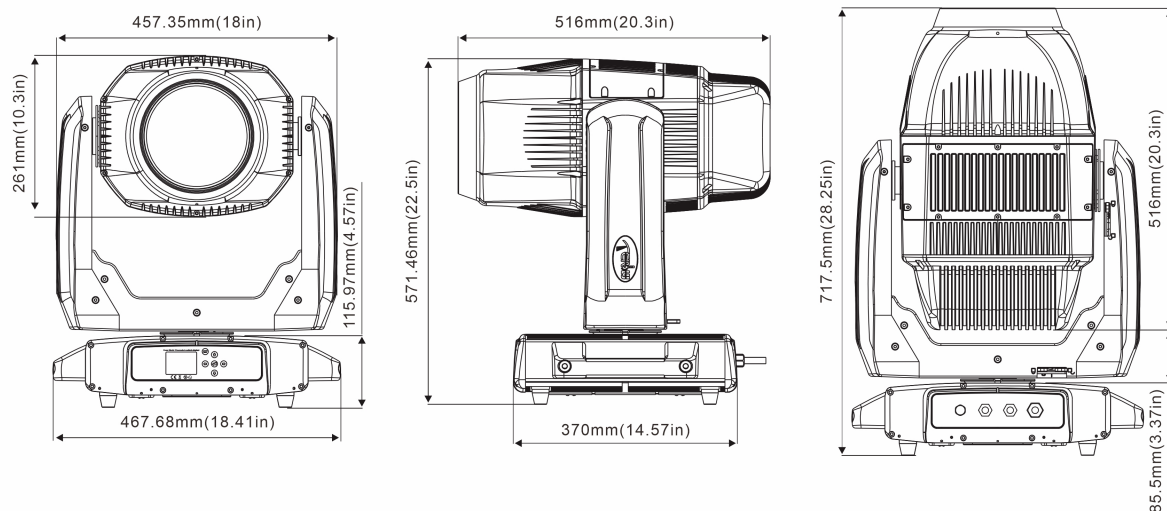

## Photometrics

Intensity LUX (2°)

652800 290133 163200 72533 26112

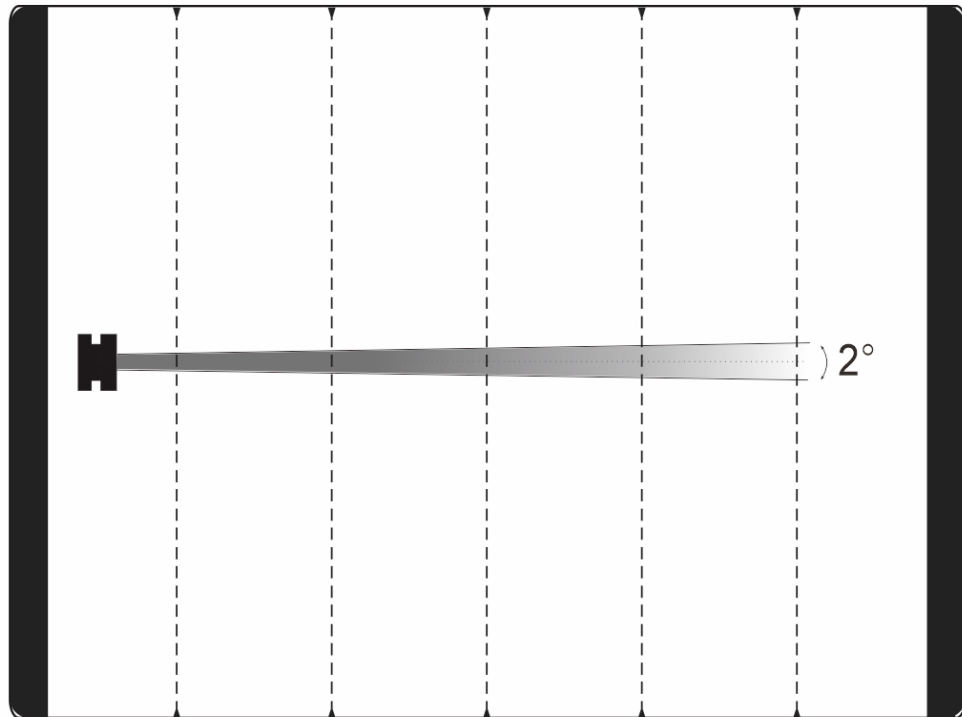

Distance(m)	10	15	20	30	50
Diameter(m)	Φ 0.35	Φ 0.53	Φ 0.7	Φ 1.05	Φ 1.75

Errors and omissions are possible. All specifications are subject for change without prior notice.