

---

## S380B IP BEAM

SMART Series



### Product parameters

#### Optical system

Source: Philips MSD Platinum Flex 300, 380W

Fixture CT: 6500K

Lamp life expectancy : 6000h

Illuminance: 163200lux@20m

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning

#### Color system



---

## CMY color mixing

1 Color wheel: 14 dichroic filters + open

## Gobo system

1 Static gobo wheel: 15 gobos + open

## Effects

Motorized focus

Beam angle: 2 °

2 Rotating prisms: 4 linear + 16 facet, dynamic prism morph, indexable with macros

Frost

Dimming: 0-100% linear dimming

Shutter: mechanical with various speed

## Protection rating

IP66

## Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

## Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 19/17/27CH

## Control

Input signal isolation

Auto thermal protection circuit

RDM protocol

## Electric parameter



AC200-240V, 50/60Hz  
Power: 550W

### Dimension and weight

Product dimension: 467.7x370x717.5mm  
Packing dimension (carton): 865x560x465mm  
Net weight: 37kg  
Gross weight (carton): 42kg




### Colours/ Gobos

COLOR WHEEL: 

STATIC GOBO WHEEL:   


:

### Dimensions

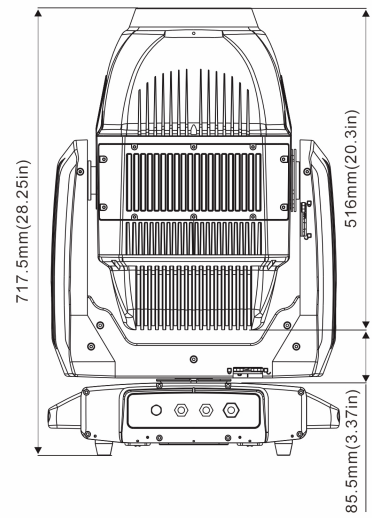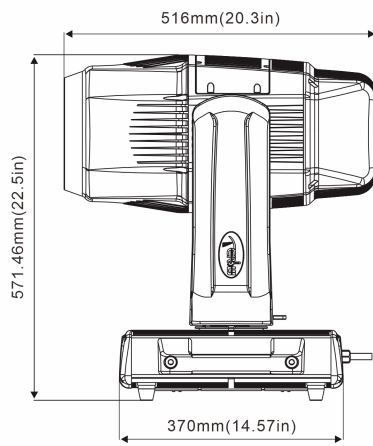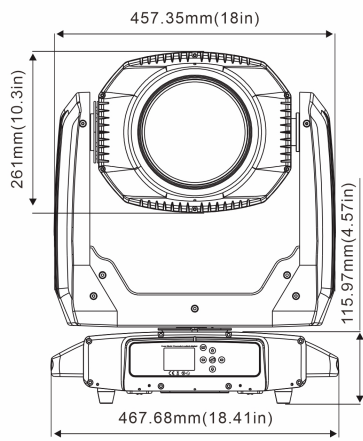


## Photometrics



## Intensity LUX (2°)

652800 290133 163200 72533 26112

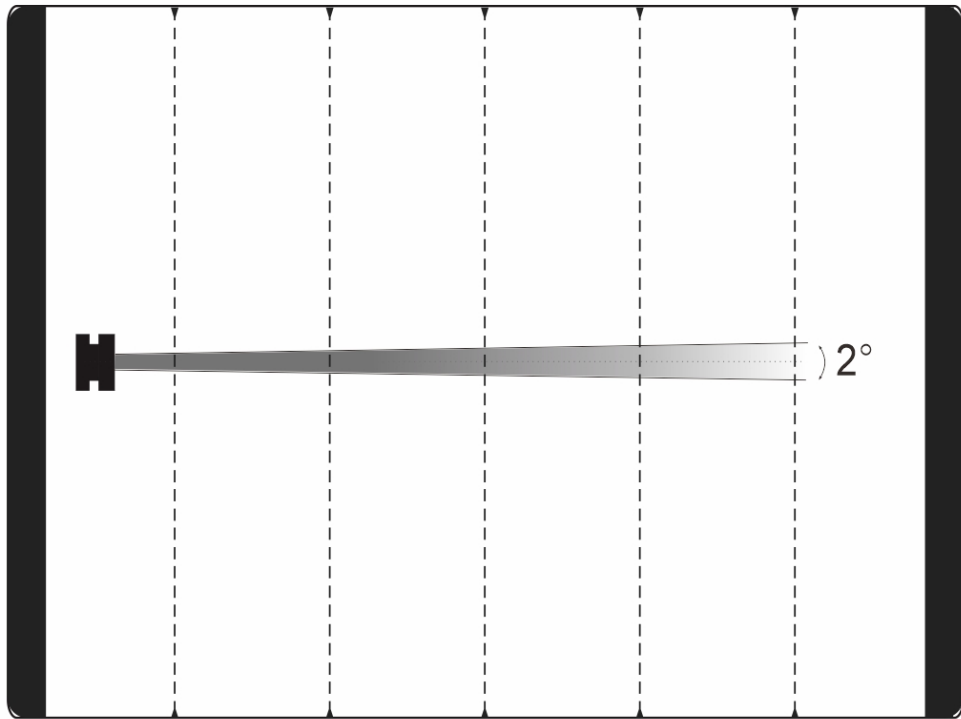

Distance(m)	10	15	20	30	50
Diameter(m)	Φ 0.35	Φ 0.53	Φ 0.7	Φ 1.05	Φ 1.75

Errors and omissions are possible. All specifications are subject for change without prior notice.