

---

## S380B BEAM

SMART Series



### Product parameters

#### Optical system

Source: Philips MSD Platinum Flex 300, 380W

Fixture CT: 6400K

Lamp life expectancy : 6000h

Fixture output: 11000lm

Illuminance: 163100lux@20m

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning



---

## Color system

CMY color mixing

1 Color wheel: 14 dichroic filters + open

## Gobo system

1 Static gobo wheel: 15 gobos + open

## Effects

Motorized focus

Beam angle: 2 °

2 Rotating prisms: 4 linear + 16 facet, dynamic prism morph

Frost

Dimming: 0-100% linear dimming

Shutter: mechanical with various speed

## Protection rating

IP20

## Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

## Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 19/17/27CH

## Control

Input signal isolation

Auto thermal protection circuit

RDM protocol

## Electric parameter



AC200-240V, 50/60Hz

Power: 550W

### Dimension and weight

Product dimension: 388.8x326x641.5mm

Packing dimension (carton): 740x500x455mm



Net weight: 20.5kg

Gross weight (carton): 25.5kg




### Colours/ Gobos

COLOR WHEEL: 

:

STATIC GOBO WHEEL:   


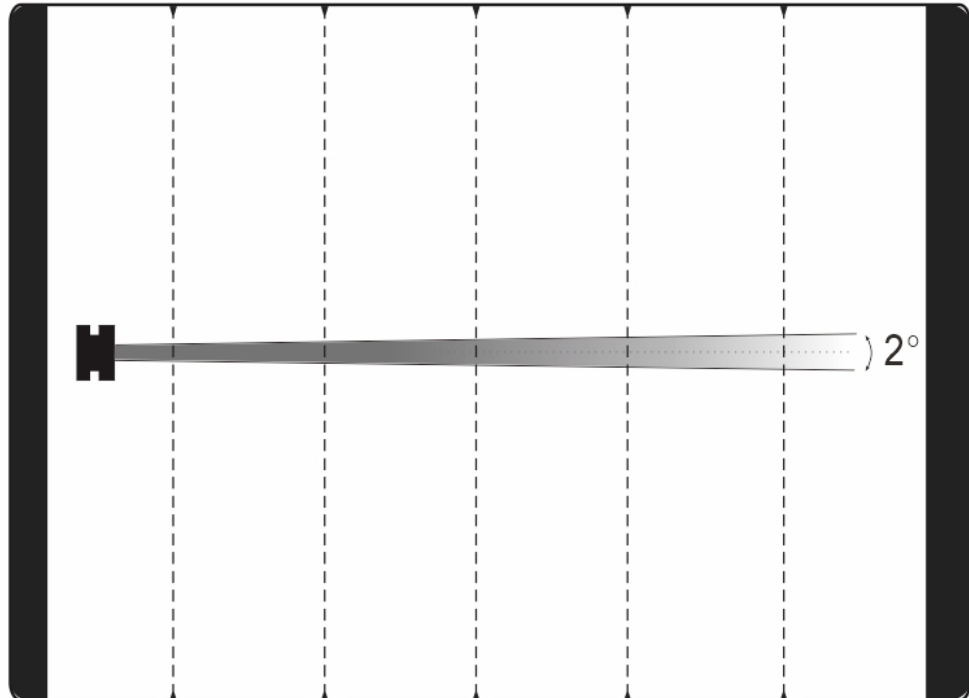
### Dimensions

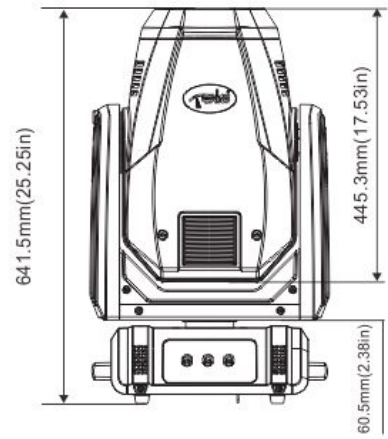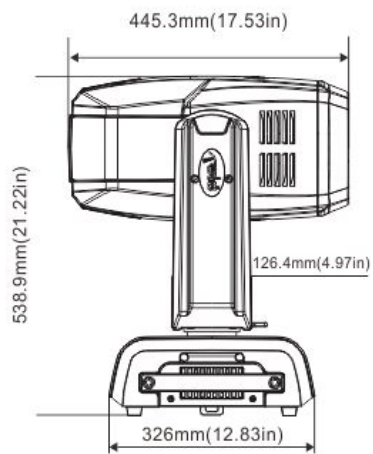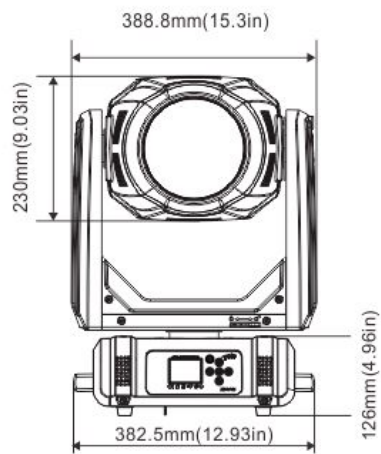

## Photometrics

Intensity LUX (2°)

652400 289955 163100 72489 26096



Distance(m)

10

15

20

30

50

Diameter(m)

$\Phi 0.35$

$\Phi 0.53$

$\Phi 0.7$

$\Phi 1.06$

$\Phi 1.80$

Errors and omissions are possible. All specifications are subject for change without prior notice.