

### S380B BEAM



### **Product parameters**

Optical system

Source: Philips MSD Platinum Flex 300, 380W

Fixture CT: 6500K

Light source life expectancy: 6000 hours Average Light Source Life\*

\*Testing conditions in the lab may differ based on various factors.

Fixture output: 11000lm

Illuminace: 160000lux@20m

Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning



Color system CMY color mixing

1 Color wheel: 14 dichroic filters + open

Gobo system

1 Static gobo wheel: 15 gobos + open

**Effects** 

Motorized focus

Beam angle: 2°

2 Rotating prisms: 4 linear + 16 facet, dynamic prism morph

**Frost** 

Dimming: 0-100% linear dimming

Shutter: mechanical with various speed

Protection rating

**IP20** 

Display

Battery operated for fast addressing,15 seconds standby auto lock Pan/tilt disengage (hold Left arrow and Right arrow buttons)

Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 19/17/27CH

Auto thermal protection circuit

Control

Input signal isolation

**RDM** protocol



Electric parameter AC200-240V, 50/60Hz

Power: 550W

Dimension and weight

Product dimension: 389x326x642mm

Packing dimension (carton): 740x500x455mm

Net weight: 20 kg

Gross weight (carton): 26 kg


## Colours/ Gobos





:

### **Dimensions**






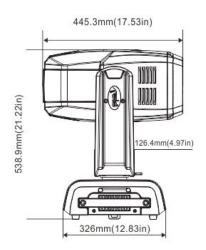



# **Photometrics**



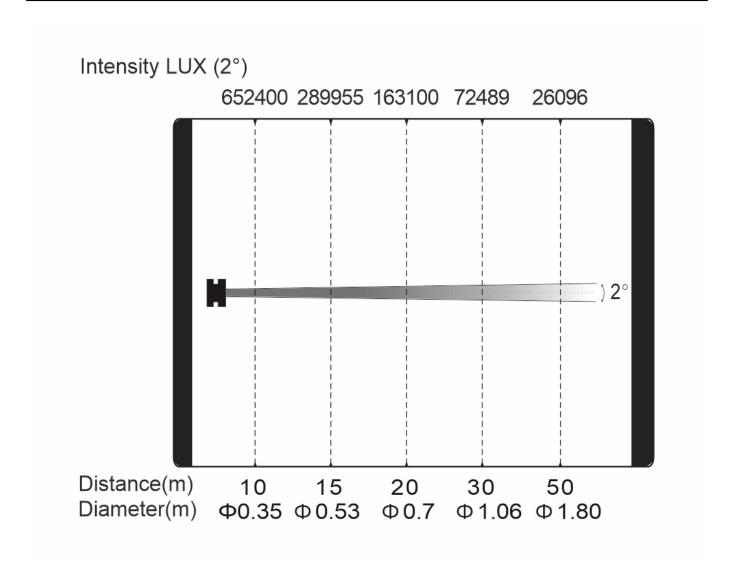

Errors and omissions are possible. All specifications are subject for change without prior notice.