Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

SL1000PH LED PROFILE



Product parameters

Optical system

Source: 1000W White LED
Fixture CT: 6100K （SL1000P: 6700K)
Lamp life expectancy：20,000 hours Average Light Source Life*
CRI: up to 95, (SL1000P: ≥70)

Fixture output: 32000lm (SL1000P: 52,000lm)

Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning

Color system
CMY+CTO color mixing

1 Color wheel: 6 dichroic filters + open

Gobo system
1 Rotating gobo wheel:6 interchangeable gobos + open. Gobo OD: 36mm
1 Static gobo wheel:7 interchangeable gobos + open

1 Animation wheel

Effects
Motorized focus
Zoom range: 7 ° -55 ° (SL1000P: 6.5 ° -55 °)
Auto focus
2 Rotating prisms: 4 linear + 4 facet
Frost: light frost, heavy frost
4 individually positionable blades with ±45 ° rotation of the complete framing system
Iris
Dimming: 0-100% linear dimming
Strobe: electronic, variable from 1-25Hz or pulse
GAMMA：2.0, 2.2, 2.4, 2.6, 2.8, to fit different camera's linearity

Refresh rate: 1200Hz

Protection rating

IP20

Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

Software

Upgrade with DMX
Remote reset DMX address and fixture by DMX
Run time of fixture and light source
3 Control channel modes: 39/37/60CH

Auto thermal protection circuit

Control

Input signal isolation

RDM protocol

Electric parameter

AC200-240V, 50/60Hz

Power: 1350W

Dimension and weight

Product dimension: 479x326x834mm
Packing dimension (carton): 965x595x465mm
Net weight: 41kg
Gross weight (carton): 52kg

***Testing conditions in the lab may differ based on various factors.**

Colours/ Gobos


COLOR WHEEL: 

ROTATING GOBO WHEEL: 

STATIC GOBO WHEEL: 

Dimensions


Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

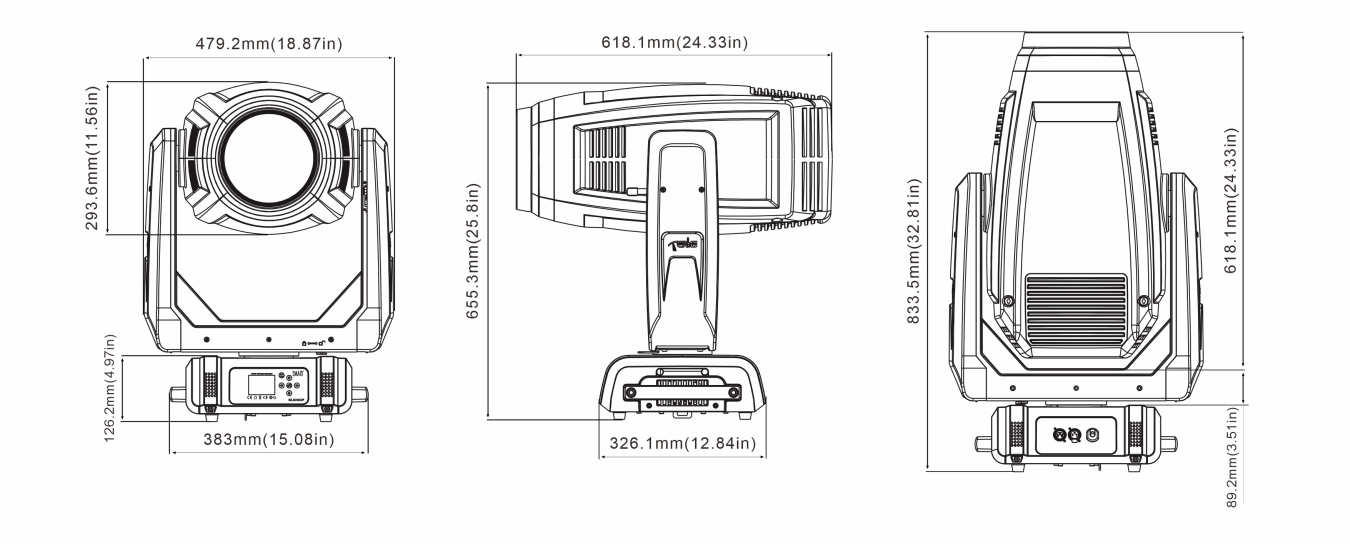


Photometrics

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com


SL1000PH
Min. Beam Mode
Intensity LUX (7 °)

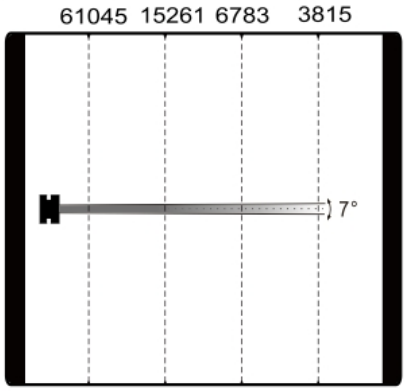


Max. Beam Mode
Intensity LUX (55°)

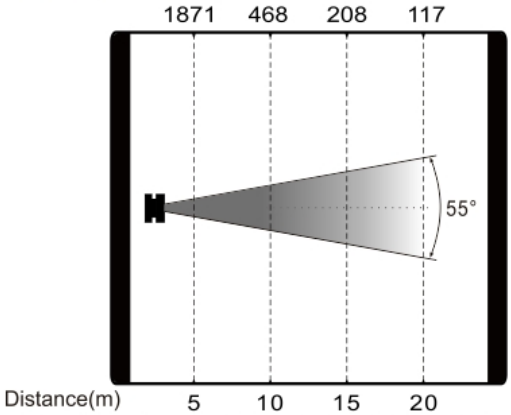

SL1000P
Min. Beam Mode
Intensity LUX (6.5 °)

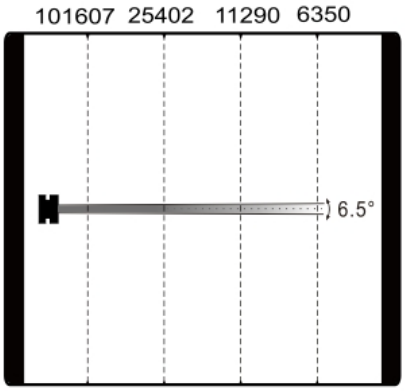

Max. Beam Mode
Intensity LUX (55°)

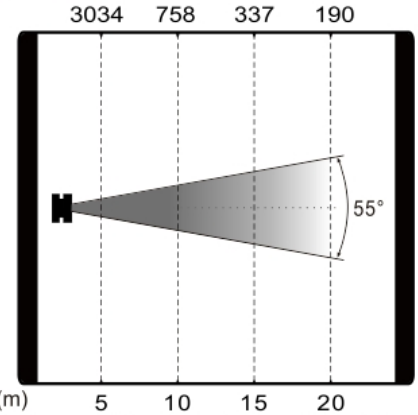

Errors and omissions are possible. All specifications are subject for change without prior notice.