

## V2500S SPOT



### Product parameters

#### OPTICS

Source: Philips MSR GOLD 1510 SA/DE(Or Philips MSR GOLD 1500 FASTFIT optional)

CT: 6000K

Life: 750H

#### MOVEMENT

Pan movement: 540 ° /630 ° optional (16 bit)

Tilt movement: 270 ° (16 bit)

Advanced motion system: auto repositioning, fast, quiet and smooth

#### COLORS

CMY color mixing

CTO linear 2700K-6500K

1 Color wheel: 8 dichroic filters +open

30 CMY+CTO+color macros and random CMY

GOBOS

2 Rotating gobo wheels:

6 interchangeable +open each

FEATURES

Rotating prism: 3 facet prism

Focus

Iris

Shutter: mechanical, variable from 1-25Hz or random

Dimming: 0-100% linear dimming

Frost: 0-100%

Zoom: 8 ° -50 ° linear zoom

Animation wheel: special dynamic

flame or water effect

DISPLAY

Battery operated for fast addressing

15 second standby auto lock

Pan/ Tilt disengage (hold MENU and ENTER button)

SOFTWARE

Upgrades: fast and convenient using uploader over DMX

Remote reset DMX address, lamp control, fixture reset, sound control by DMX

Run time of lamp and fixture

3 Control channel modes: 29/27/41 channels

OTHER SPEC

Input signal isolation

Auto thermal protection circuit

Optional installed wireless receiver  
RDM compatible

POWER  
AC100-240V, 50/60HZ

DIMENSIONS AND WEIGHT  
Packing dimension(flightcase): 75x 58.5 x92cm  
Net Weight: 38.5kgs  
Gross Weight(flightcase): 75kgs


Colours/ Gobos

ANIMATION WHEEL: 

COLOR WHEEL: 


ROTATING GOBO WHEEL 1: 

Dimensions

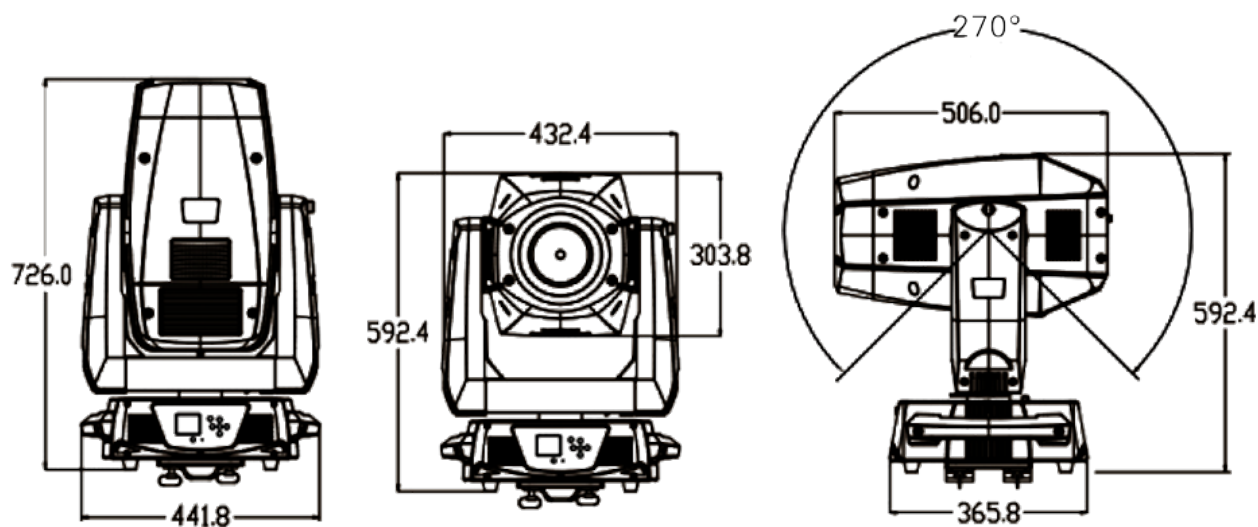

## Photometrics

	3500	1756	1047
Intensity LUX(Max)	85480	40360	22370

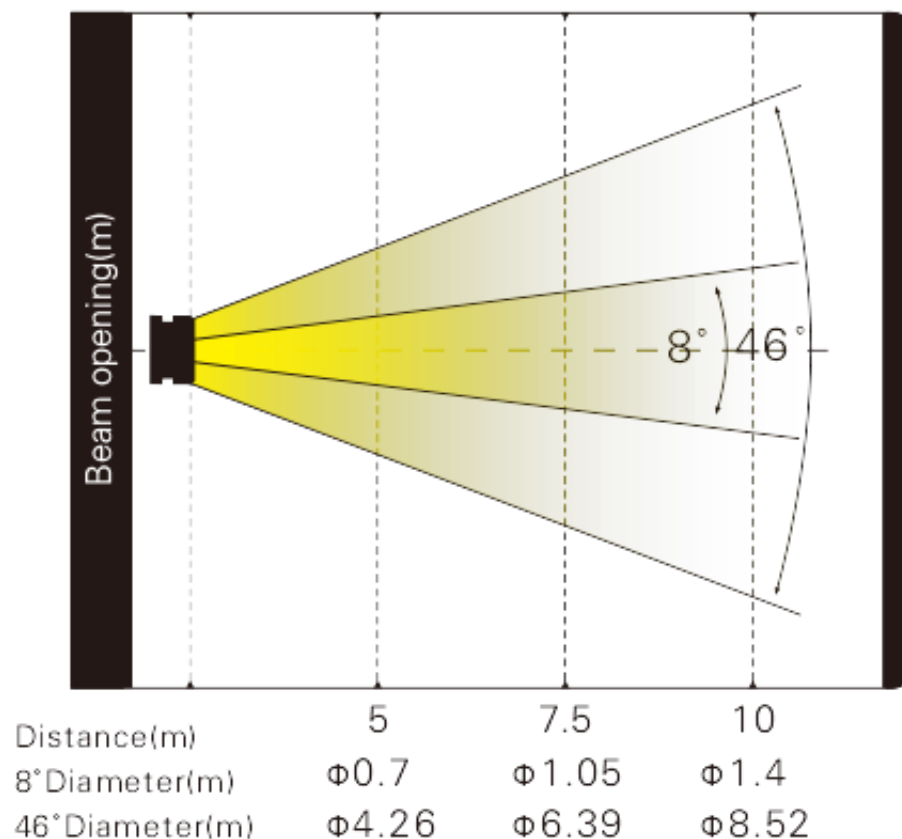

Errors and omissions are possible. All specifications are subject for change without prior notice.