Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

V2500S SPOT



Product parameters

OPTICS

Source: Philips MSR GOLD 1510 SA/DE(Or Philips MSR GOLD 1500 FASTFIT optional)
CT: 6000K
Life: 750H

MOVEMENT

Pan movement: 540 ° /630 ° optional (16 bit)
Tilt movement: 270 ° (16 bit)
Advanced motion system: auto repositioning, fast, quiet and smooth

COLORS

CMY color mixing
CTO linear 2700K-6500K
1 Color wheel: 8 dichroic filters +open
30 CMY+CTO+color macros and random CMY

GOBOS

2 Rotating gobo wheels:
6 interchangeable +open each

FEATURES

Rotating prism: 3 facet prism
Focus
Iris
Shutter: mechanical, variable from 1-25Hz or random
Dimming: 0-100% linear dimming
Frost: 0-100%
Zoom: 8 ° -50 ° linear zoom
Animation wheel: special dynamic
flame or water effect

DISPLAY

Battery operated for fast addressing
15 second standby auto lock
Pan/ Tilt disengage (hold MENU and ENTER button)

SOFTWARE

Upgrades: fast and convenient using uploader over DMX
Remote reset DMX address, lamp control, fixture reset, sound control by DMX
Run time of lamp and fixture
3 Control channel modes: 29/27/41 channels

OTHER SPEC

Input signal isolation
Auto thermal protection circuit

Optional installed wireless receiver
RDM compatible


POWER
AC100-240V, 50/60HZ

DIMENSIONS AND WEIGHT
Packing dimension(flightcase): 75x 58.5 x92cm
Net Weight: 38.5kgs
Gross Weight(flightcase): 75kgs

Colours/ Gobos


ANIMATION WHEEL: 

COLOR WHEEL: 

ROTATING GOBO WHEEL 1: 


Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

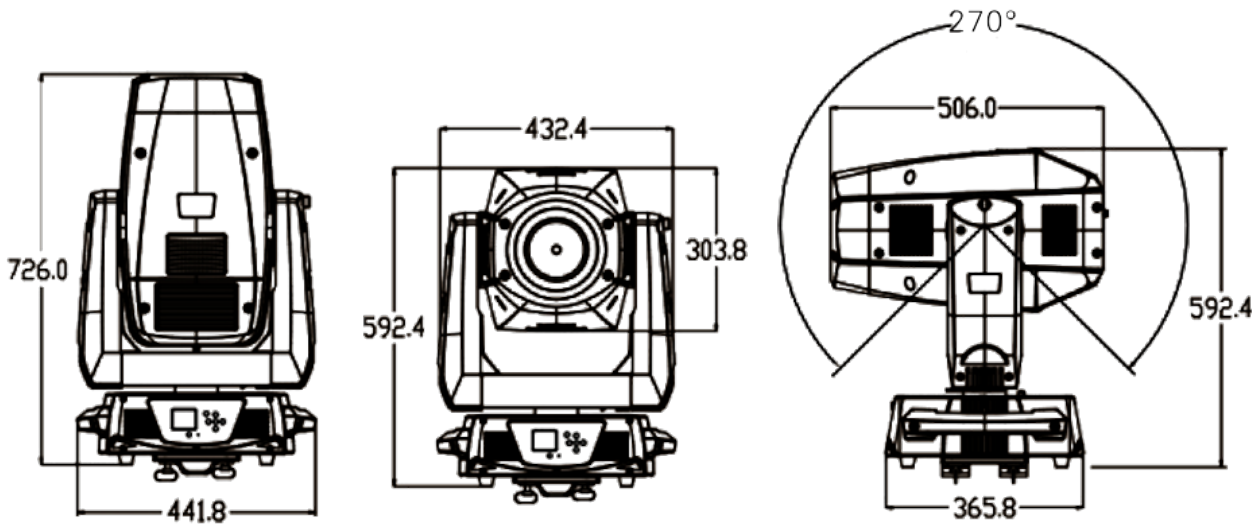

Photometrics

	3500	1756	1047
Intensity LUX(Max)	85480	40360	22370

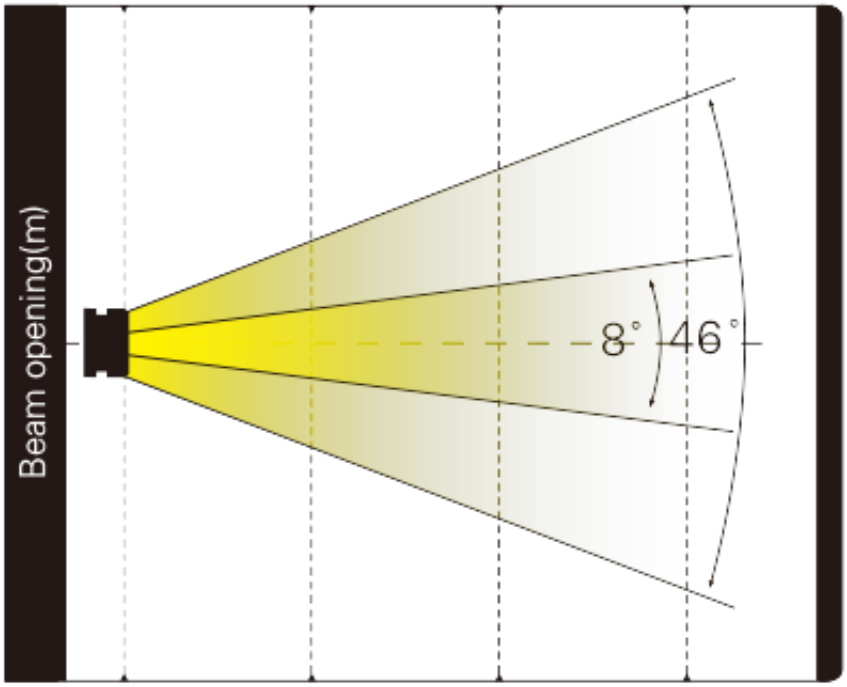

Distance(m)	5	7.5	10
8°Diameter(m)	Φ0.7	Φ1.05	Φ1.4
46°Diameter(m)	Φ4.26	Φ6.39	Φ8.52

Errors and omissions are possible. All specifications are subject for change without prior notice.