

## SL400S LED SPOT

SMART Series



### Product parameters

#### Optical system

Source: 400W White LED

Fixture CT: 7500K

Light source life expectancy : 20,000 hours Average Light Source Life\*

CRI: up to 70

Fixture output: 17,000lm

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning

Color system

CMY+CTO color mixing

1 Color wheel: 7 dichroic filters + open

Gobo system

1 Rotating gobo wheel: 7 interchangeable gobos + open. Gobo OD: 25.5mm

1 Static gobo wheel: 9 gobos + open

1 Animation wheel

Effects

Motorized focus

Zoom range: 6 ° -45 ° (field angle)

Auto focus

1 Rotating prism: 5 facet prism, indexable with macros

Frost

Iris

Dimming: 0-100% linear dimming

Strobe: electronic, variable from 1-25Hz or pulse

GAMMA: 2.2

Refresh rate: 1200Hz

## Protection rating

IP20

## Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

## Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel modes: 28/26/40CH

Auto thermal protection circuit

## Control

Input signal isolation

RDM compatible

## Electric parameter

AC200-240V, 50/60Hz

Power: 600W

### Dimension and weight

Product dimension: 386x326x656mm


Packing dimension (carton): 785x505x445mm

Net weight: 24kg

Gross weight (carton): 29kg

\*Testing conditions in the lab may differ based on various factors.


### Colours/ Gobos

COLOR WHEEL: 

ROTATING GOBO WHEEL: 


STATIC GOBO WHEEL: 

### Dimensions

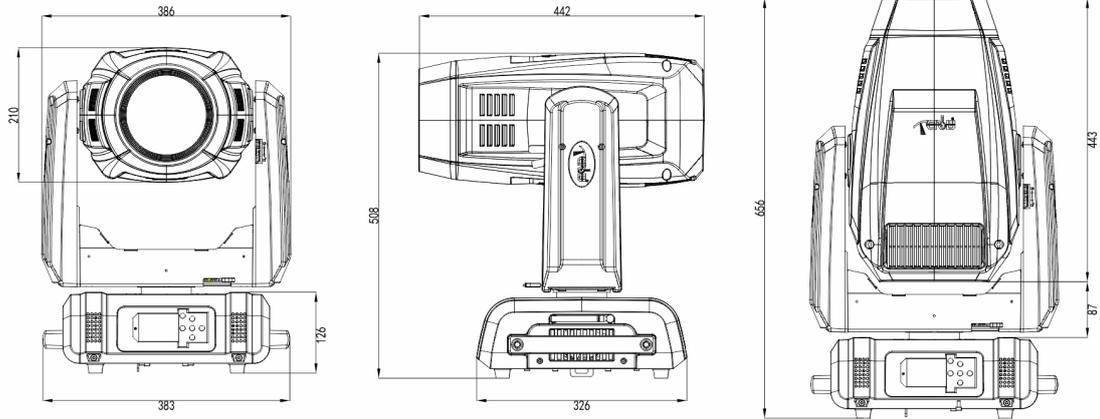


## Photometrics

Min. Beam Mode  
Intensity LUX (6°)

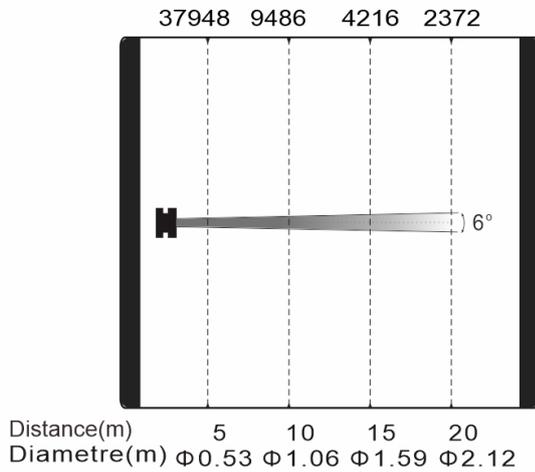

Max. Beam Mode  
Intensity LUX (45°)

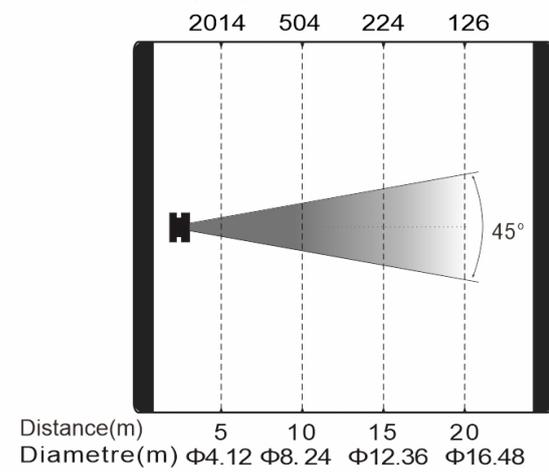

Errors and omissions are possible. All specifications are subject for change without prior notice.