

---

## GLZ300 IP LASER BEAM



### Product parameters

#### Optical system

Source: laser 260W

Fixture CT: 7900K

LED life expectancy : 12,000h

CRI: 70

Illuminance: 400,000lux@20m

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning



---

## Color system

CMY color mixing

1 Color wheel: 22 dichroic filters + open

## Gobo system

1 Rotating gobo wheel: 13 interchangeable gobos+ open. Gobo OD: 8mm

1 Static gobo wheel: 26 gobos + open

## Effects

Motorized focus

Beam angle: 0.8 °

Auto focus

4 Rotating prisms: 8 facet + 4 linear + 48 facet + 10 facet prism, each two prisms can be overlaid to produce various beam effects

Heavy frost

Dimming: 0-100% linear dimming

Strobe: electronic with various speed

## Protection rating

IP65

## Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/ Tilt disengage (hold LEFT and RIGHT button)

## Software

Upgrade with DMX

Remote reset DMX address, fixture reset by DMX

Run time of light source and fixture

3 Control channel modes: 24/22/34CH

## Control

Input signal isolation

Auto thermal protection circuit



## RDM protocol

### Electric parameter

AC200-240V, 50/60Hz

Power: 400W

### Dimension and weight


Product dimension: 467.7x370x717.5mm

Packing dimension (carton): 560x465x865mm

Net weight: 36.5 kg

Gross weight (carton): 41 kg


## Colours/ Gobos

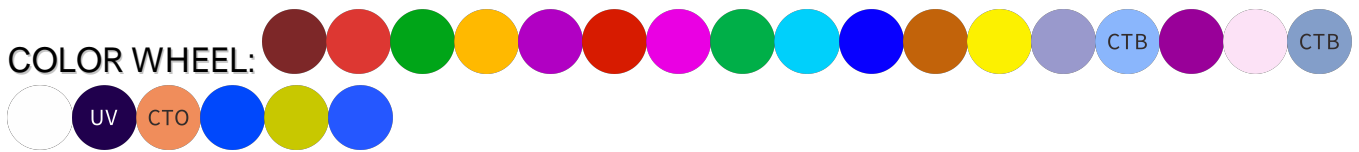

:



## Dimensions

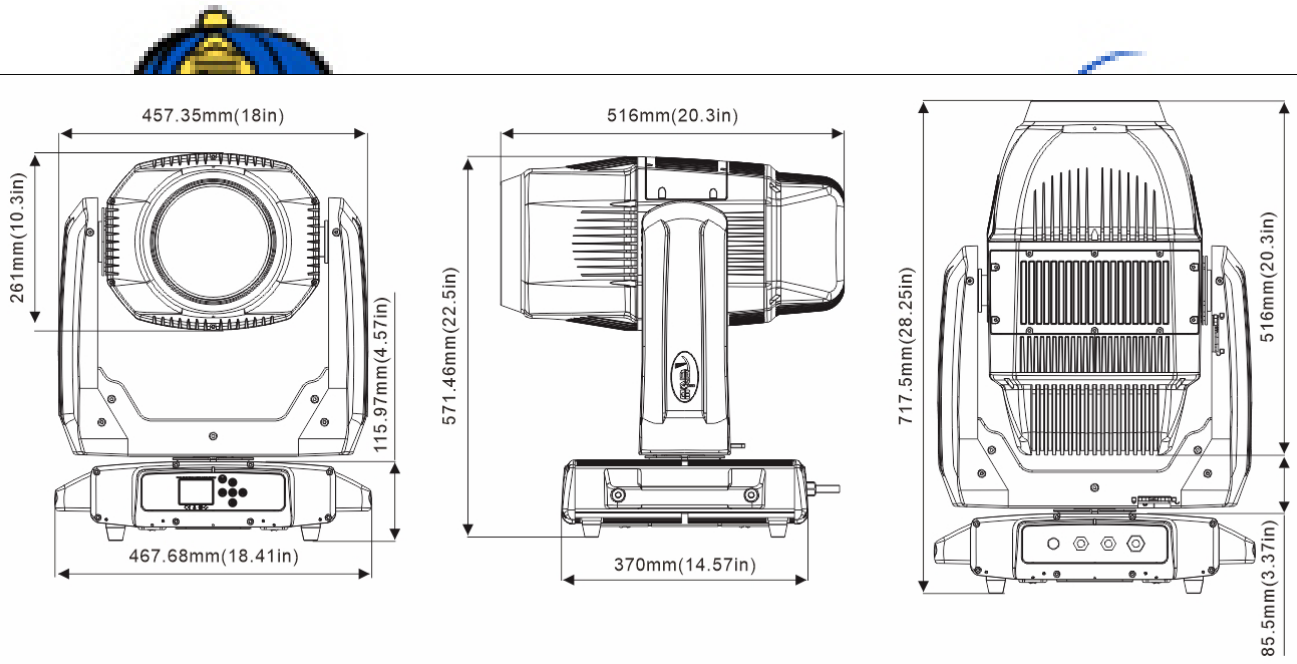


## Photometrics



Intensity LUX (0.8°)

1600000 711111 400000 177778 64000

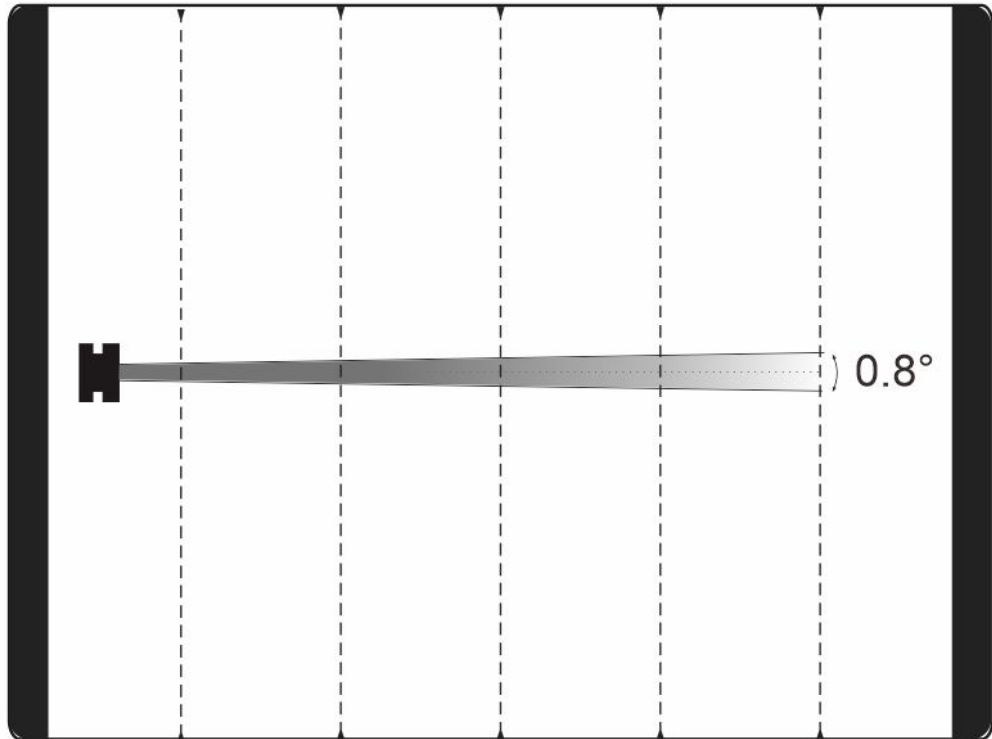

Distance(m)

10

15

20

30

50

Diameter(m)

Φ0.14

Φ0.21

Φ0.28

Φ0.42

Φ0.7

0.8°

Errors and omissions are possible. All specifications are subject for change without prior notice.