

---

## SL5000P IP LED SPOT(WITH FRAMING)

SMART Series



### Product parameters

#### Optical system

Source: 1400W White LED

Fixture CT: 6500K

LED life expectancy : 20,000h

CRI: Ra>70

Fixture output: 48,000lm

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 250 ° (16 bit)

Auto X/Y repositioning



---

## Color system

CMY+CTO color mixing

1 Color wheel: 6 dichroic filters + open

## Gobo system

1 Rotating gobo wheel: 6 interchangeable gobos + open. Gobo OD: 36mm

1 Static gobo wheel: 7 interchangeable gobos + open

1 Animation wheel

## Effects

Motorized focus

Zoom range: 5.5 ° -46 °

Auto focus

2 Rotating prisms: 4 linear + 4 facet

Frost: light frost, heavy frost

4 individually positionable blades with  $\pm 90^\circ$  rotation of the complete framing system

Iris

Dimming: 0-100% linear dimming

Strobe: electronic, variable from 1-25Hz or pulse

## Protection rating

IP65

## Display

Display

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

## Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

2 Control channel modes: 40/62CH



---

## Control

Input signal isolation

Auto thermal protection circuit

RDM protocol

## Electric parameter

AC220-240V, 50/60Hz

Power: 1700W

## Dimension and weight

Product dimension: 457x332x825mm

Net weight: 53 kg


## Colours/ Gobos

COLOR WHEEL: 

ROTATING GOBO WHEEL: 

STATIC GOBO WHEEL: 


## Dimensions

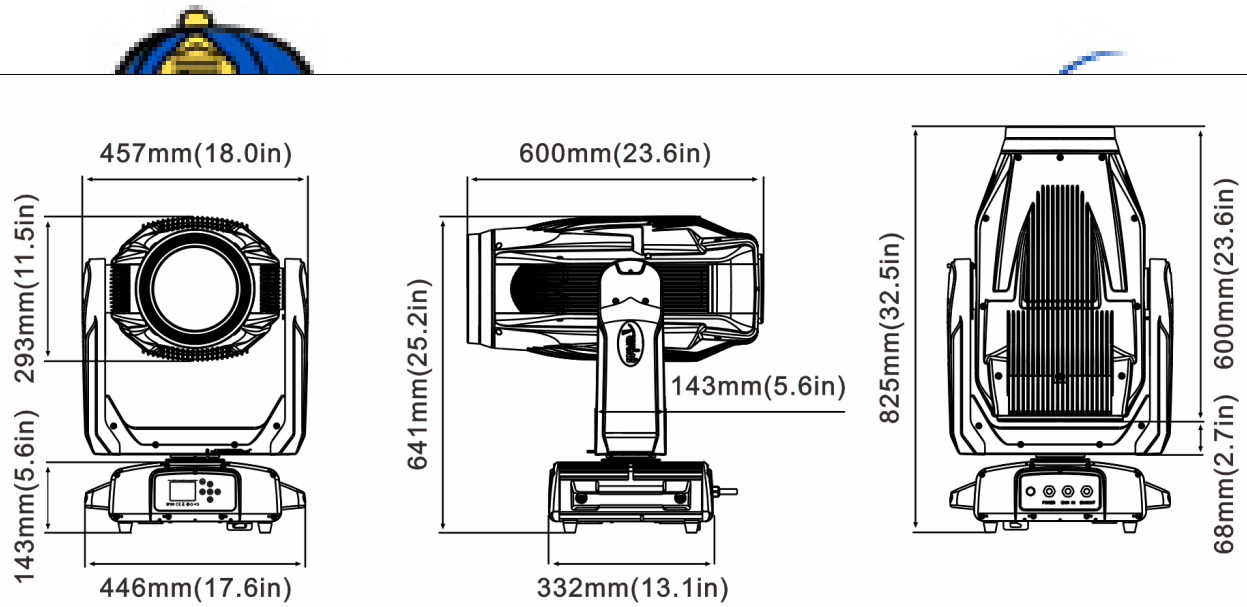

## Photometrics

Min. Beam Mode  
Intensity LUX (5.5 °)


106804 26701 11867 6675

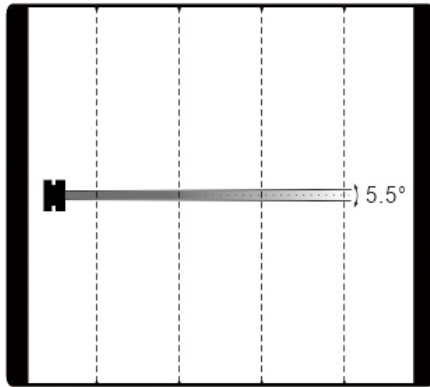

Distance(m) 5 10 15 20  
Diametre(m)  $\phi$ 0.515  $\phi$ 1.03  $\phi$ 1.545  $\phi$ 2.06

Max. Beam Mode  
Intensity LUX (46°)

4683 1171 520 293

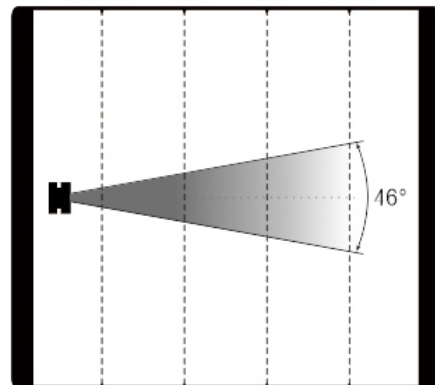

Distance(m) 5 10 15 20  
Diametre(m)  $\phi$ 4.22  $\phi$ 8.44  $\phi$ 12.66  $\phi$ 16.88

Errors and omissions are possible. All specifications are subject for change without prior notice.