

## SH9 BEAM

SMART Series



### Product parameters

#### Optical system

Source: MSD Silver 300 LL

Fixture CT: 6500K

Lamp life expectancy : 3000 hours Average Light Source Life\*

\*Testing conditions in the lab may differ based on various factors.

CRI : Ra 80

Fixture output: 9500lm

Illuminance: 230000lux@15m

#### Movement

Pan: 540 ° /630 ° optional(16 bit)

Tilt: 270 ° (16 bit)

Auto X/Y repositioning

Color system

1 Color wheel: 13 dichroic filters + open, indexable, rainbow effect

Gobo system

1 Static gobo wheel: 13 gobos + open

Effects

Motorized focus

Beam angle: 2 °

2 Rotating prisms: 8 facet + 48 facet prisms, dynamic prism morph

Frost

Dimming: 0-100% linear dimming

Shutter: mechanical with various speed

Protection rating

IP20

Display

Full – color LCD touch screen

Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

1 Control channel modes: 17CH

Auto thermal protection circuit

Control

Input signal isolation

RDM protocol

Electric parameter

AC200-240V, 50/60Hz  
Power: 400W

### Dimension and weight

Product dimension: 340x220x522mm  
Packing dimension (carton): 415x345x625mm  
Net weight: 14kg  
Gross weight (carton): 17kg


### Colours/ Gobos

COLOR WHEEL: 

7-COLOR FILTER: 

STATIC GOBO WHEEL: 


### Dimensions

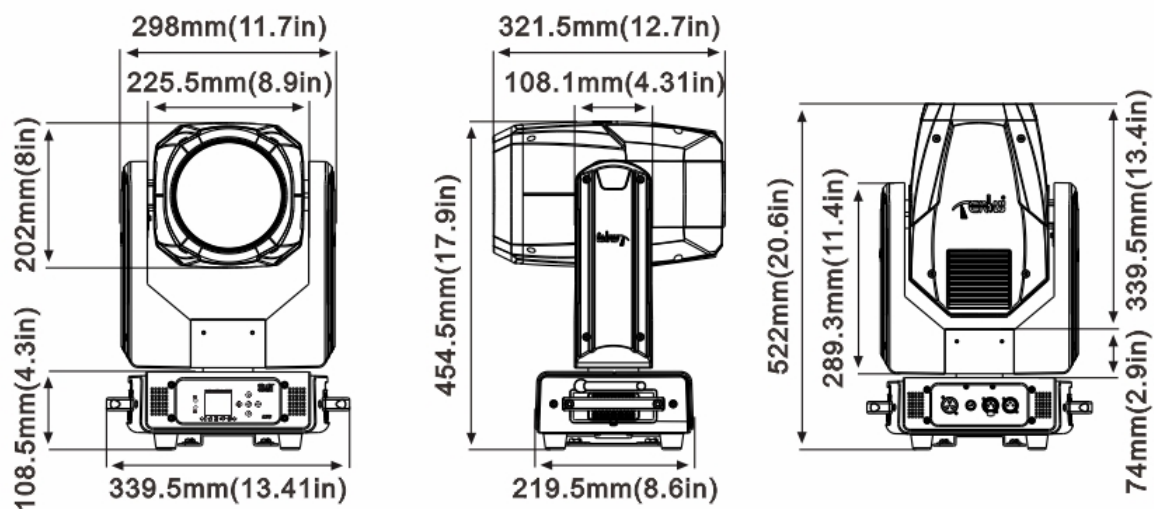

## Photometrics

Intensity LUX (2°)

232000 135000 83520 58000

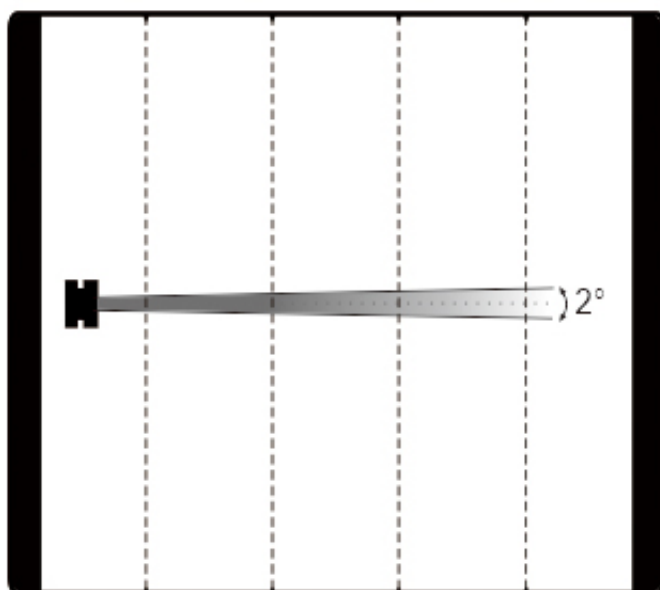

Distance(m)

15 20 25 30

Diameter(m) Φ 0.555 Φ 0.74 Φ 0.925 Φ 1.11

Errors and omissions are possible. All specifications are subject for change without prior notice.