

### **GLW1960 IP LED WASH**



# **Product parameters**

Optical system

Source: 19x60W RGBW LED

Light source life expectancy: 50,000 hours Average Light Source Life\*

CRI: 70

Fixture output:19,000lm

Movement

Pan: infinite rotation(16 bit) Tilt: infinite rotation (16 bit)

Auto X/Y repositioning

Color system



## **RGBW** color mixing

Color temperature linear: 2700K to 8500K

**Effects** 

Zoom range: 7 ° -73 ° (field angle) Dimming: 0-100% linear dimming

Strobe: electronic, variable from 1-25Hz or pulse

Pixel control

GAMMA: 2.0, 2.2, 2.4, 2.6, 2.8, to fit different visual linearity requirements

Protection rating

**IP65** 

Display

LCD display

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

#### Software

Upgrade with DMX and USB as optional Remote reset DMX address and fixture by DMX Run time of fixture and light source 2 Control channel modes: 29/176CH

### Control

Input signal isolation
Optional installed wireless receiver
Art-Net control
RDM protocol

Electric parameter

AC120-240V, 50/60Hz

Power: 1600W

Dimension and weight



Product dimension: 479x370x579mm

Net weight: 33 kg

\*Testing conditions in the lab may differ based on various factors.


# Colours/ Gobos


:

:

:


### **Dimensions**




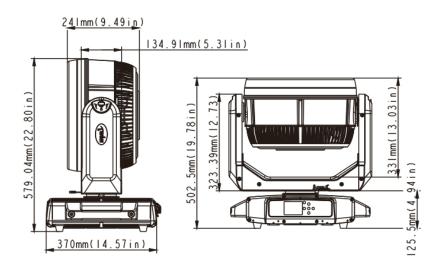

# **Photometrics**







Errors and omissions are possible. All specifications are subject for change without prior notice.