

GS-Z19 LED PAR



Product parameters

Optical system

Source: 19x20W RGBW LED

"Lamp life expectancy : 50,000 hours Average Light Source Life*

*Testing conditions in the lab may differ based on various factors."

Fixture output: 4000lm

Color system

RGBW color mixing

Color temperature linear: 2700K to 8000K

Effects

Zoom range: 10 ° -40 °

Dimming: 0-100% linear dimming
Ring control
Protection rating
IK08 , IP65 , Class I

Software
DMX channel: RGBW(4chs)

Control
RDM protocol

Electric parameter
AC100-240V, 50/60Hz
Maximum input power: 300W
Power supply: Built-in power supply

Dimension and weight
Product dimension: 357x323x433mm
Net weight: 10kg

Environment
Ta: -20 to +45
Anti-condensation system: optional
Corrosion resistance: optional for marine environment
Passive cooling: die cast aluminum housing
Compliance: CE,ROHS

Mechanics
Housing material: anodized die cast aluminum
Finish: Gray(RAL9006),Black(RAL9005)
Mounting: floor, ceiling or wall mounting (adjustable bracket)

Optional electronic accessory
Plug,leader cable,cable junction box




Colours/ Gobos

:

:


:

Dimensions

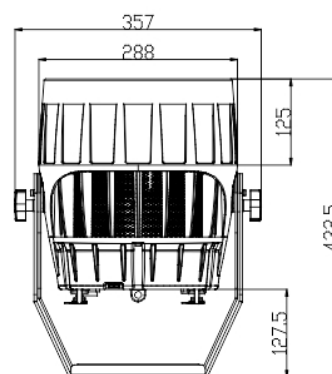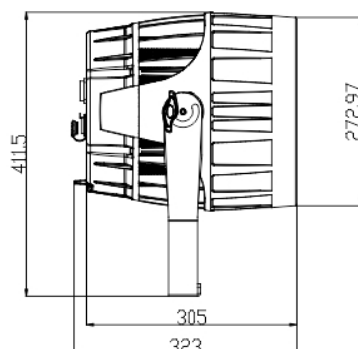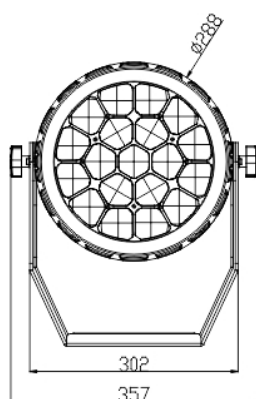


Photometrics

Intensity LUX(10°)

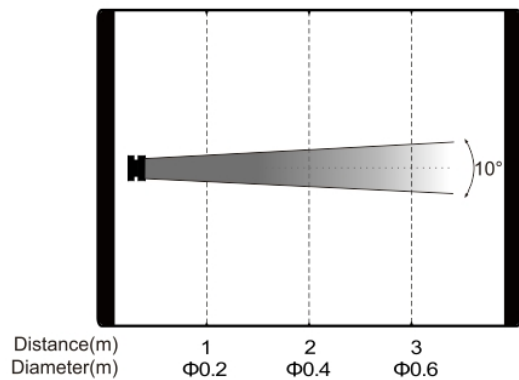

Intensity LUX(40°)

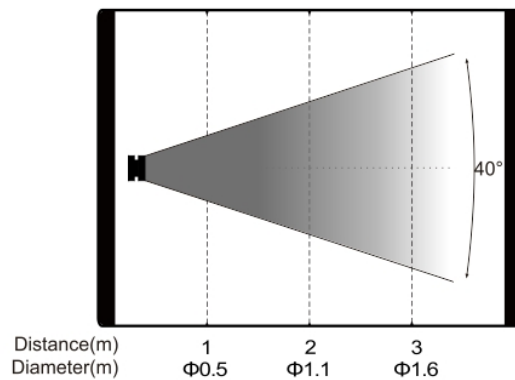

Errors and omissions are possible. All specifications are subject for change without prior notice.