Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

SL3000P IP LED PROFILE



Product parameters

Optical system

Source: 1200W white LED
Fixture CT: 6500K
Light source life expectancy：20000 hours Average Light Source Life*
CRI: Ra≥70 (adjustable and other CRI optional)
Fixture output: 40000lm

Movement

Pan:540 ° (16 bit)
Tilt: 270 ° (16 bit)
Auto pan/tilt repositioning

Color system
CMY+CTO color mixing
1 Color wheel: 6 dichroic filters+open

Gobo system
2 Rotating gobo wheel: each with 7 interchangeable gobos+ open
1 Animation wheel

Effects
Motorized focus
Zoom range：4.5 ° -55 °
Auto focus
2 Rotating prisms: 4-facet liner prism + 4-facet circular prism, used only or overlap, indexable, rotating in both directions
Frost: light, heavy
4 individually positionable blades with ±120 ° rotation of the complete framing system
Iris：5%-100% open
Dimming：0-100% linear dimming
Strobe: electronic, variable from 1-25Hz or pulse

Protection rating
IP66

Display
LCD Display
Pan/tilt disengage (hold Left and Right buttons), support to complete the reset detection in the flight case

Software
Upgrade with DMX
Run time of fixture and light source
2 Control channel modes: 44/66CH
Auto thermal protection

Control

Input signal isolation
Optional wireless DMX
Optional Art-Net Control
RDM protocol

Electric parameter

AC100-240V, 50/60Hz
Power consumption: 1400W

Dimension and weight

Product dimension: 444x315x679mm
Packing dimension (carton): 810x550x430mm
Net weight：35 kg
Gross weight (carton)：39 kg

***Testing conditions in the lab may differ based on various factors.**

Colours/ Gobos


COLOR WHEEL: 

ROTATING GOBO WHEEL I: 


ROTATING GOBO WHEEL II: 


Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

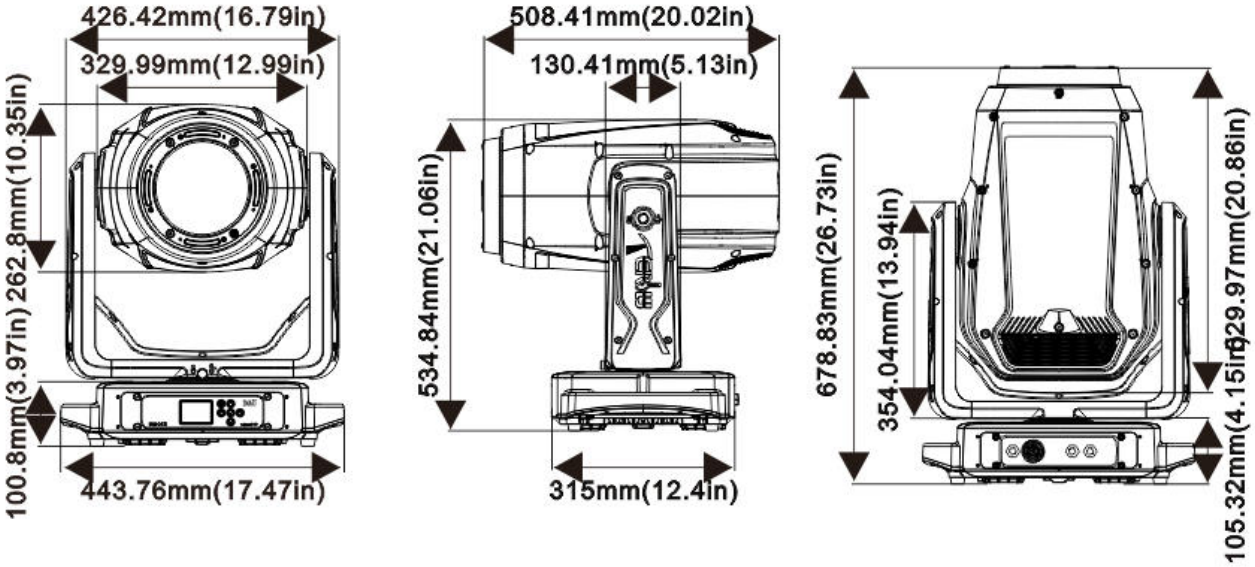

Photometrics

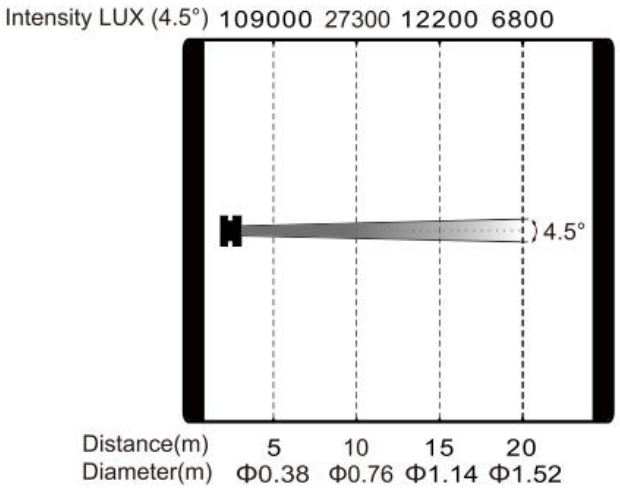

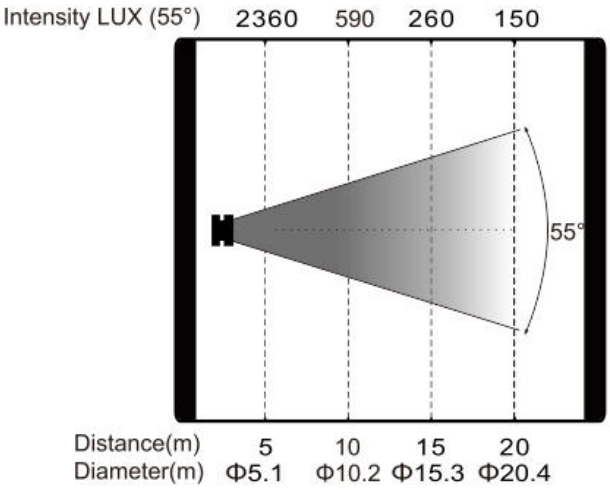

Errors and omissions are possible. All specifications are subject for change without prior notice.