

## GS-PAR19 LED PAR



### Product parameters

#### Optical system

Source: 19x20W RGBW LED

Fixture CT: 6000K

Light source life expectancy : 50,000 hours Average Light Source Life\*

CRI: Ra 70(optional High CRI: Ra: up to 90 )

Output: 10300lm@VISO (10 ° )

#### Color system

RGBW color mixing

#### Effects

Beam angle: 10 ° ( 20 ° /30 ° /45 ° /60 ° optional )

Dimming: 0-100% linear dimming  
Strobe: electronic, variable from 1-25Hz or pulse  
Ring control  
GAMMA: 2.0 , 2.2,2.4,2.6,2.8, to fit different camera's linearity  
Refresh rate: 1K,2K,3K,4K,5K,6K,10K,15K,20K,25K

Protection rating  
IP66

Display  
Fast addressing

Software  
Upgrade with DMX  
Remote reset DMX address and fixture by DMX  
Run time of fixture and light source  
3 Control channel modes: 8/10/17CH  
Auto thermal protection circuit

Control  
RDM compatible

Electric parameter  
AC200-240V, 50/60Hz  
Power: 300W


Dimension and weight  
Product dimension: 293x145x310mm  
Net weight: 6kg

\*Testing conditions in the lab may differ based on various factors.

## Colours/ Gobos


:  
 :  
 :

## Dimensions

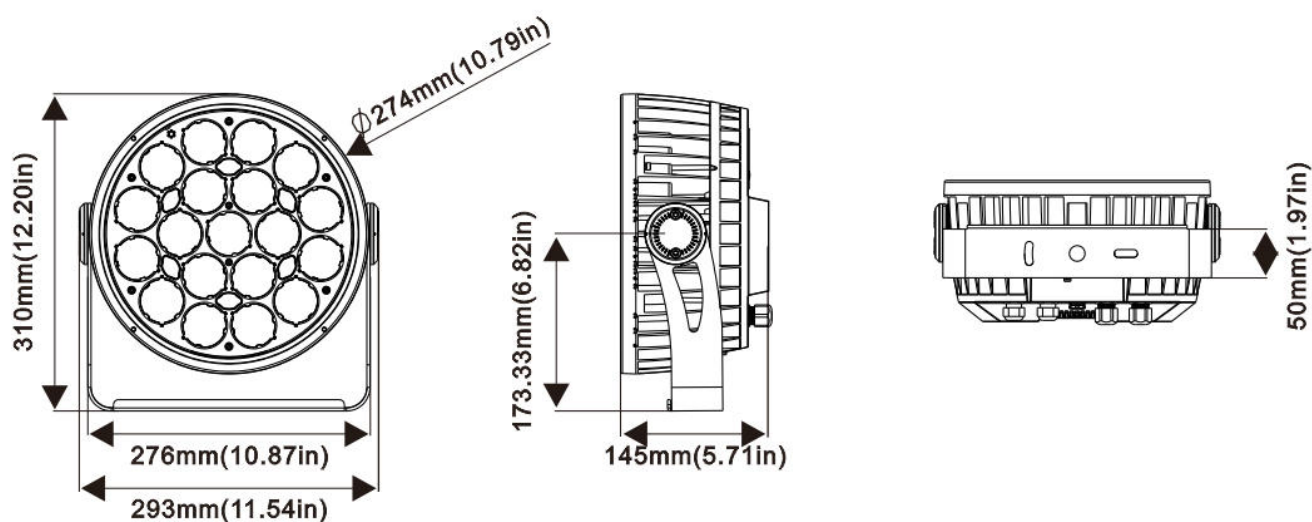

## Photometrics

Imin Beam mode angle( $10^{\circ}$ )

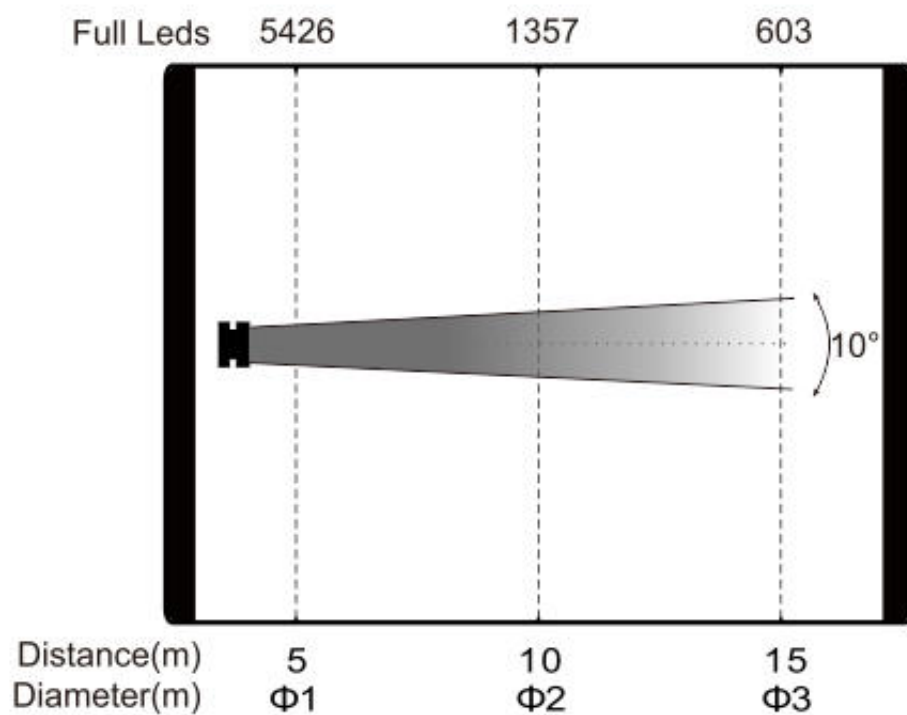

Errors and omissions are possible. All specifications are subject for change without prior notice.