Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

PT160S SPOT



Product parameters

OPTICS
Lamp: Philips Platinum 5R
CT: 8000K, Life: 2,000H

MOVEMENT
Pan movement: 540 ° /630 ° optional (16 bit)
Tilt movement: 270 ° (16 bit)
Advanced moving system: fast, stable and quiet, auto X-Y repositioning

COLORS
1 Color wheel: 8 dichroic filters +open, indexable, rainbow effect

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

GOBOS

1 Rotating gobo wheel: 8 interchangeable, rotating, indexable gobos+open
1 Static gobo wheel: 14 indexable gobos+open

FEATURES

3 Control channel modes: 17/15/24 channels
Rotating prism: 3 facets and prism macros
Iris: motorized linear change from 5%-100%
Focus: motorized focus
Shutter: variable from 1-25 flashes or random strobe
Dimming: 0-100% linear dimming
Frost: 0-100%
Beam angle: 16 °

DISPLAY

Advanced and convenient full-color LCD touch botton screen, with rechargeable battery
Locked automatically after standby for 15 seconds to prevent error
Friendly reset detection: hold MENU and ENTER button to lock pan/tilt reset, able to complete reset detection inside flight case
SOFTWARE
7 pre-installed programs available upon selection
Upgrades: fast and convenient through DMX cable
Reset DMX address, remote lamp switch, reset, sound control can all be done by the console
Running time of lamp and fixture on display for reference

OTHER SPEC

Input signal isolation: prevent interference to guarantee stable signal transmission
Auto-protection at high temperature: lamp automatically switches off when reaching high temperature until the fixture cools down
Optional built-in wireless receiver
RDM compatible

POWER
AC100-240V, 50/60HZ

DIMENSIONS AND WEIGHT
Packing dimension: 54.5 x42.5 x 43 cm
Net Weight: 16.5kgs
Gross Weight: 19kgs

Colours/ Gobos


COLOR WHEEL: 

ROTATING GOBO WHEEL: 


STATIC GOBO WHEEL: 

Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

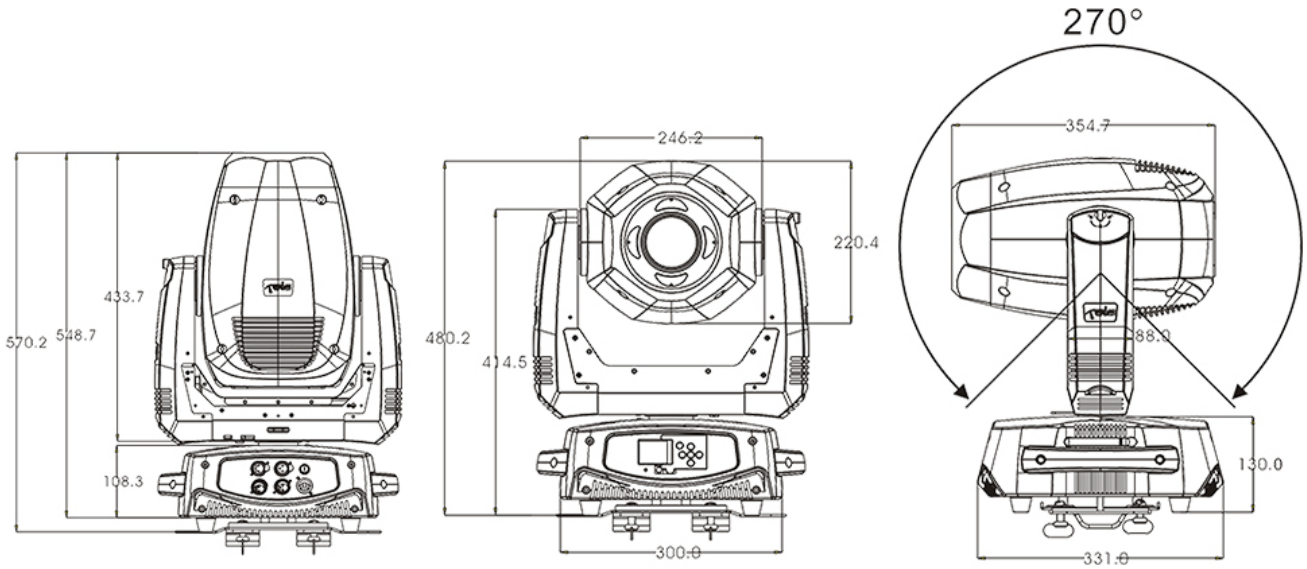


Photometrics

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Beam angle 16°

Intensity LUX	11409	2849	1250

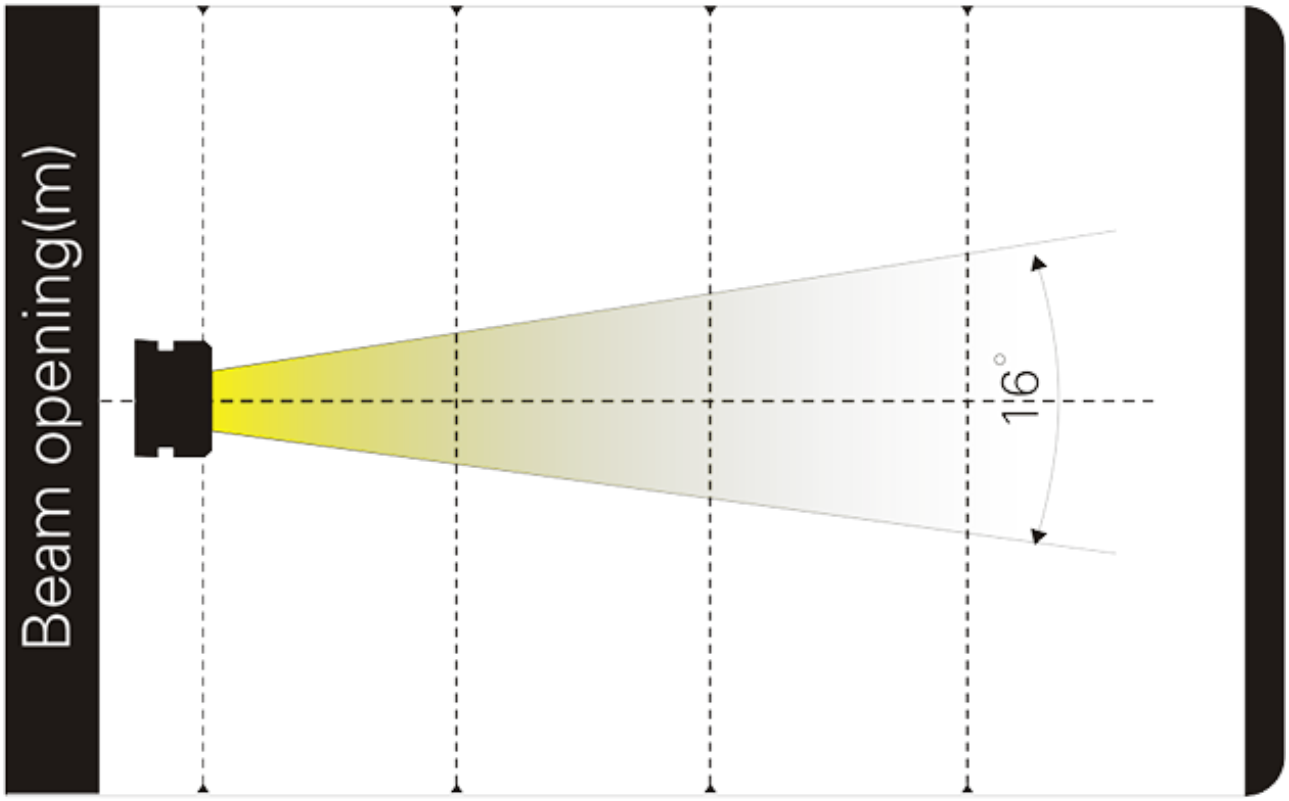

Distance(m)	2.5	5.0	7.5
Diameter(m)	Φ0.70	Φ1.40	Φ2.10

Errors and omissions are possible. All specifications are subject for change without prior notice.