

JT160B BEAM



Product parameters

OPTICS

Lamp: Philips Platinum 5R CT:8000 K, Life: 2,000H

MOVEMENT

Pan movement: 540 ° /630 ° optional (16 bit)

Tilt movement: 265 ° (16 bit)

Advanced moving system: fast, stable and quiet, auto X-Y repositioning

COLORS

1Color wheel: 12 dichroic filters +open, rainbow effect



GOBOS

1Static gobo wheel: 14 interchangeable, rotating, indexable gobos+open

FEATURES

2 Control channel modes: 12/10 channels Rotating prism: 3 facets and prism macros

Shutter: Variable from 1-13 flashes or random strobe

Dimming: 0-100% full range dimming

Frost: 0-100% Beam angle: 2 °

DISPLAY

LED display

locked automatically after 15 seconds from the last button press to prevent incorrect operation, long press menu button for 3 seconds to activate keys again Humanized reset detection set: long press menu and enter button to lock pan/tilt reset, can support fixtures do the reset detection in flight case

SOFTWARE

8 pre-built programs can be selected

Software upgrade: through DMX cable conveniently, quickly upgrade software Remote DMX addressing, lamp of/off, reset, sound control switch by controller

OTHER SPEC

Signal isolation protection function: guarantee signal transmission is very stable and without interference

High temperature automatic protection function: lamp off automatically as fixture achieve high temperature until it cool down to gurantee fixture safe usage. Optional built in wireless receiver

Advanced RDM function

POWER

AC100-240V, 50/60HZ



Packing dimension: 54.5 x 42.5 x 43 cm


Net Weight: 10kgs Gross Weight: 13kgs

Colours/ Gobos




Dimensions



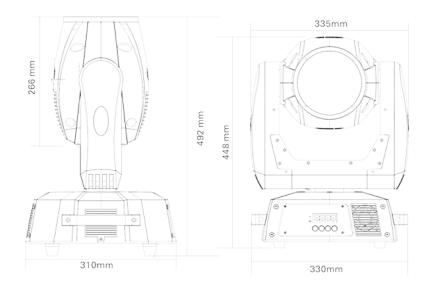

Photometrics

4/5

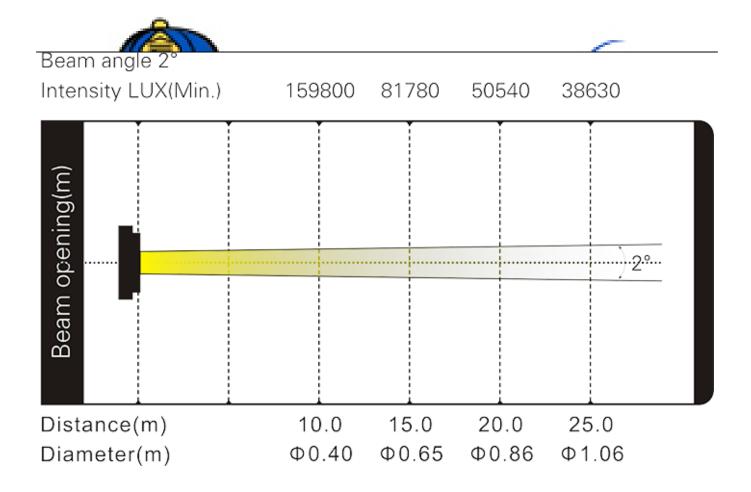

Errors and omissions are possible. All specifications are subject for change without prior notice.