Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

GL6 (GL6H) LED PROFILE



Product parameters

Optical system

Source: 600W White LED
Fixture CT: 6200K
Light source life expectancy：20,000 hours Average Light Source Life*
CRI: GL6≥74 (High CRI Version GL6H: up to 95)
Fixture output: 25,000lm

Movement

Pan: 540 ° /630 ° optional(16 bit)
Tilt: 270 ° (16 bit)
Auto X/Y repositioning

Color system
CMY+CTO color mixing
1 Color wheel: 6 dichroic filters + open

Gobo system
1 Rotating gobo wheel: 6 interchangeable gobos + open. Gobo OD: 30mm
1 Static gobo wheel: 7 gobos + open
1 Animation wheel

Effects
Motorized focus
Zoom range: 7 ° - 50 °
Auto focus
1 Rotating prism: 4 facet
Frost: light frost, heavy frost
4 individually positionable blades with ±45 ° rotation of the complete framing system
Iris
Dimming: 0-100% linear dimming
Strobe: electronic, variable from 1-25Hz or pulse

Protection rating
IP20

Display
Battery operated for fast addressing,15 seconds standby auto lock
Pan/tilt disengage (hold MENU and ENTER button)

Software
Upgrade with DMX
Remote reset DMX address and fixture by DMX
Run time of fixture and light source
3 Control channel modes: 39/37/59CH

Control

Input signal isolation
Art-Net control
RDM protocol

Electric parameter

AC100-240V, 50/60Hz
Power: 800W

Dimension and weight

Product dimension: 481x326x836mm
Packing dimension (carton): 965x595x465mm
Net weight: 46kg
Gross weight (carton): 52kg

***Testing conditions in the lab may differ based on various factors.**

Colours/ Gobos


:

COLOR WHEEL: 


ROTATING GOBO WHEEL: 

Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

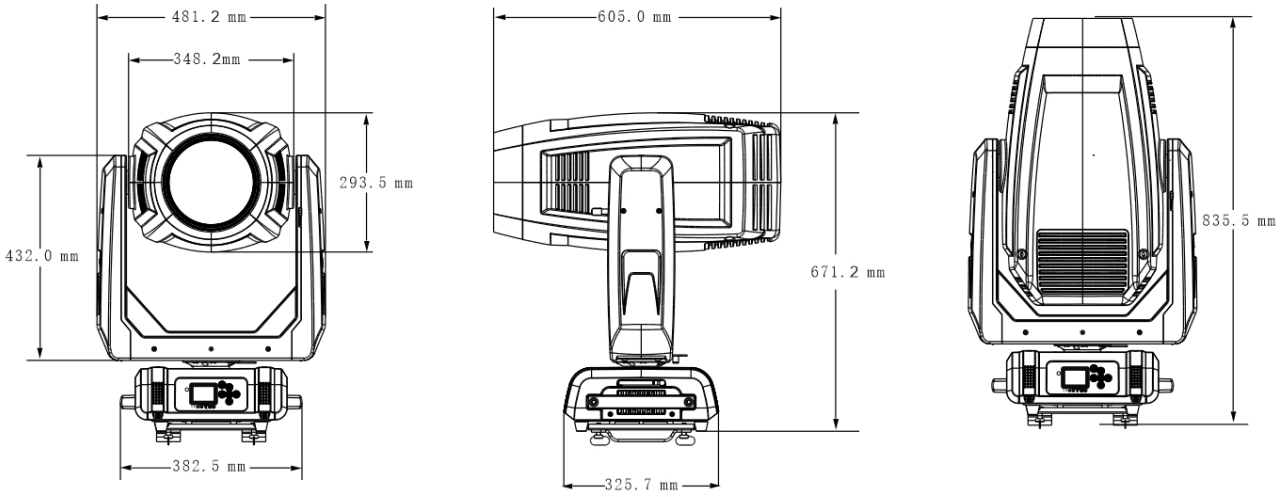

Photometrics

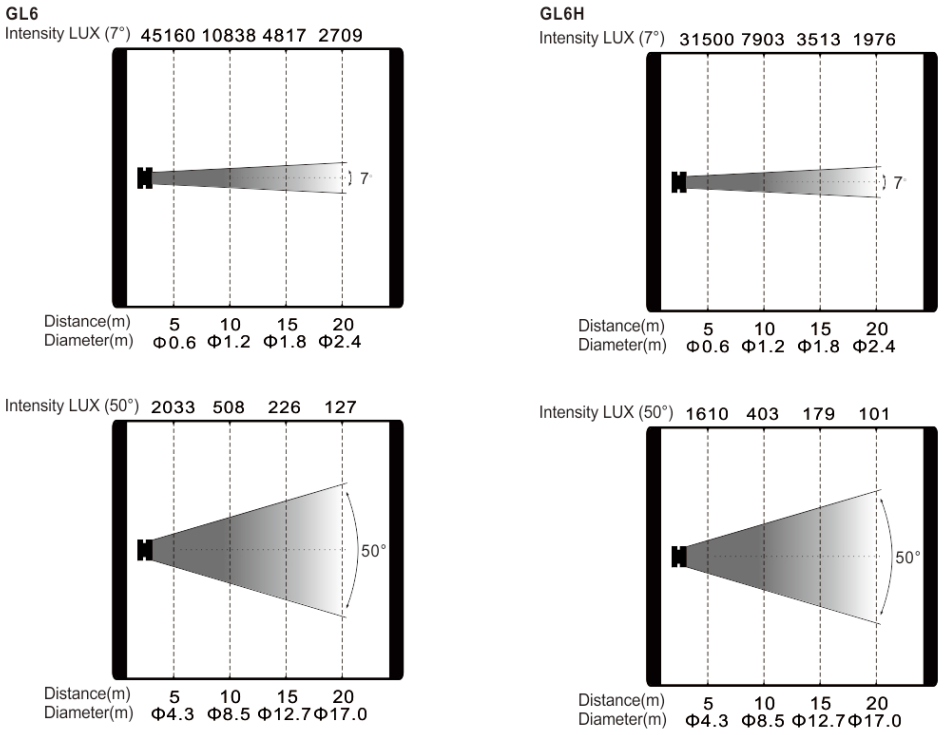

Errors and omissions are possible. All specifications are subject for change without prior notice.