

OK370Z-R II WASH



Product parameters

OPTICS

Source: 37 x 15W RGBW high power LEDs

Life: >50,000 H

MOVEMENT

Pan movement: 540 ° /630 ° optional (16 bit)

Tilt movement: 270 ° (16 bit)

Advanced motion system: auto repositioning, fast, quiet and smooth

COLOR

RGBW LED color mixing

Color temperature linear: 2700K to 8000K

Color temperature presets: 2700K, 3200K, 4300K, 5600K, 6500K, 8000K
Excellent color mixing and rainbow effect

FEATURES

Zoom: 14 ° -51 ° linear zoom
Strobe: electronic, variable from 1-25Hz or pulse
Dimmer: 0%-100% linear dimming
Ring control

DISPLAY

Battery operated for fast addressing
15 second standby auto lock
Pan/ Tilt disengage (hold MENU and ENTER button)

SOFTWARE

Upgrades: fast and convenient with uploader over DMX
Remote reset DMX address, fixture
reset, sound control by DMX
Run time of LED engine and fixture
3 Control channel modes: 35/19/49 channels
3 Operational modes: DMX-512, Master/Slave & Sound Active

OTHER SPEC

Optional pixel control. Model name: OK370Z-R
Input signal isolation
Optional installed wireless receiver
RDM compatible

POWER

AC100-240V, 50/60HZ

DIMENSIONS AND WEIGHT

Packing dimension: 70.5X60.5X43cm
Net Weight: 24.5kgs

Gross weight: 28.5kgs


Colours/ Gobos

:

:

:


Dimensions

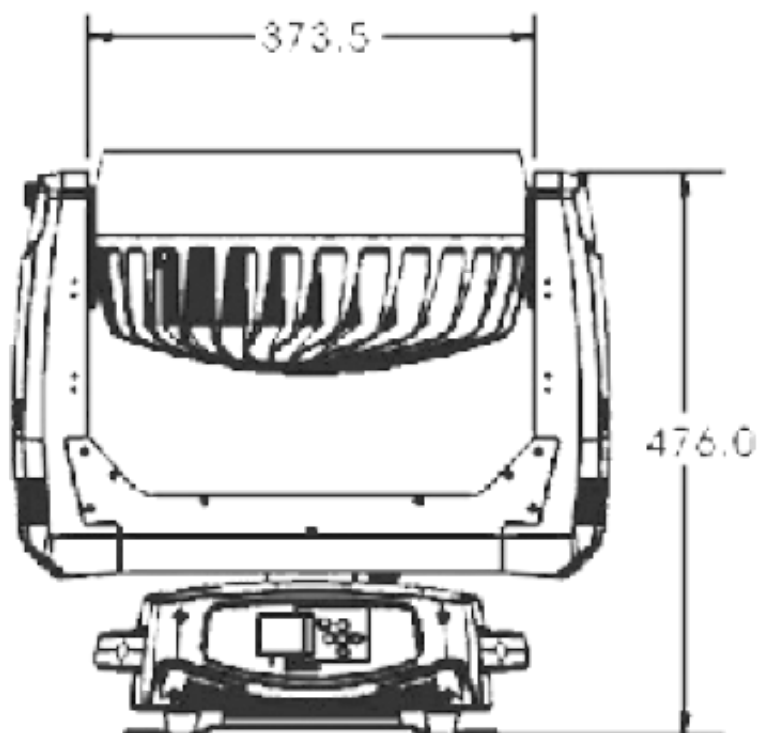

Photometrics

Intensity LUX


Red leds	8130	2244	1033
Green leds	10400	2815	1276
Blue leds	1210	330	145
White leds	13610	3793	1721
Full leds	29580	8380	3661

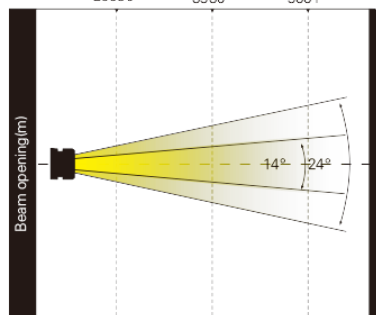

Distance(m)	2.5	5	7.5
14° Diameter(m)	Φ 0.6	Φ 1.2	Φ 1.8
24° Diameter(m)	Φ 1.05	Φ 2.1	Φ 3.15

Intensity LUX

Red leds	2000	520	255
Green leds	2536	661	313
Blue leds	310	81	37
White leds	3027	791	378
Full leds	7120	1922	894

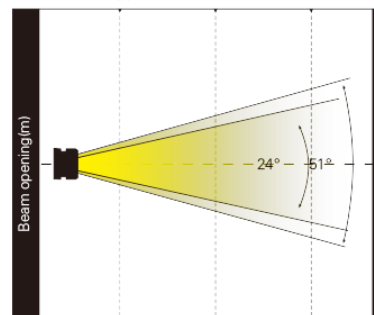

Distance(m)	2.5	5	7.5
24° Diameter(m)	Φ 1.05	Φ 2.1	Φ 3.15
51° Diameter(m)	Φ 2.38	Φ 4.76	Φ 7.14

Errors and omissions are possible. All specifications are subject for change without prior notice.