



GLW3QZ LED WASH



Product parameters

Optical system

Source: 3 x 60W RGBW LED

Lamp life expectancy : 50,000h

Fixture output: 2,500lm

Movement

Pan: infinite rotation (16 bit)

Tilt: infinite rotation (16 bit)

Auto X/Y repositioning

Color system

RGBW color mixing



Color temperature linear: 2700K to 8000K, Color temperature presets: 2700K, 3200K, 4300K, 5600K, 6500K, 8000K

Effects

Zoom range: 9 ° -75 ° (field angle)

Dimming: 0-100% linear dimming

Strobe: electronic, variable from 1-25Hz or pulse

GAMMA: 2.0, 2.2, 2.4, 2.6, 2.8, to fit different visual linearity requirements

Refresh rate: 900Hz-25,000Hz

Protection rating

IP20

Display

Battery operated for fast addressing, 15 seconds standby auto lock

Pan/tilt disengage (hold Left arrow and Right arrow buttons)

Software

Upgrade with DMX

Remote reset DMX address and fixture by DMX

Run time of fixture and light source

3 Control channel Modes: 22/20/28CH

Control

Input signal isolation

Optional Installed wireless receiver

RDM protocol

Electric parameter

AC100-240V, 50/60Hz

Power: 280W

Dimension and weight

Product dimension: 253x224x377mm



Packing dimension (carton): 440x365x295mm

Net weight: 8kg

Gross weight (carton): 10kg


Colours/ Gobos

:



:

:

Dimensions

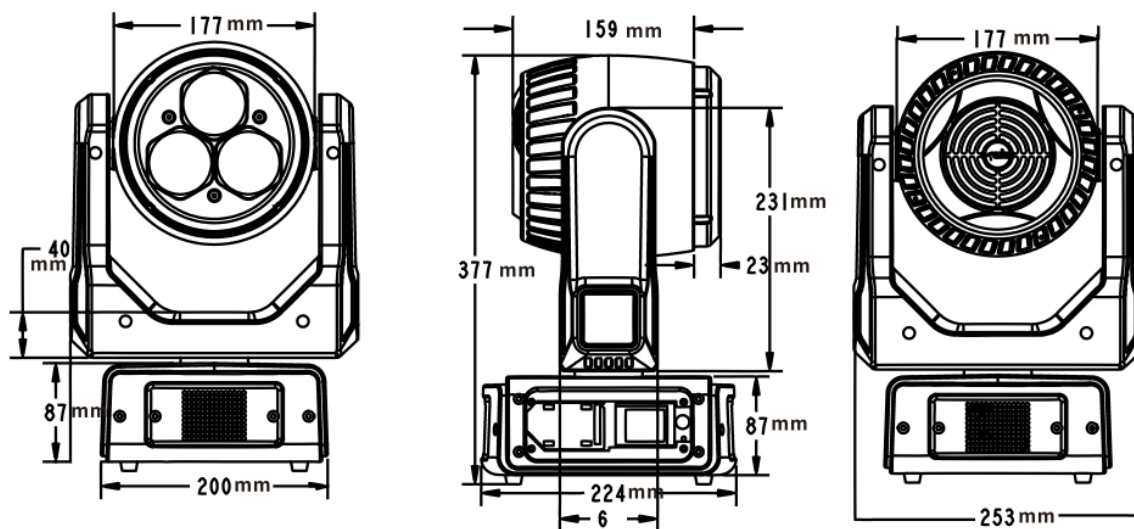

Photometrics

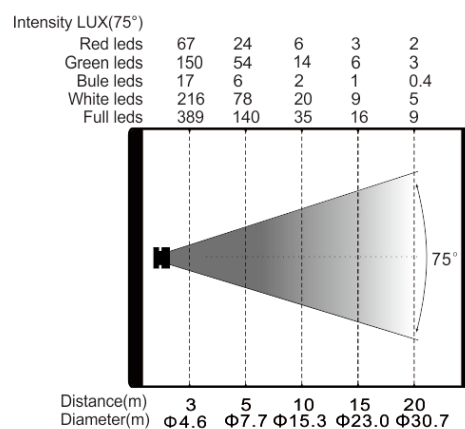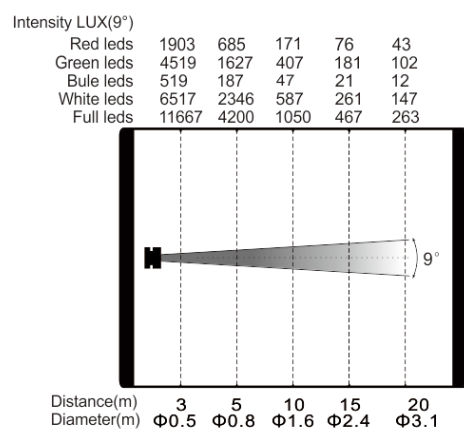

Errors and omissions are possible. All specifications are subject for change without prior notice.