Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

T180C LED PROFILE



Product parameters

Optical system

Source: R/G/B/A/M,5-in-1 LED Engine,180W
Fixture CT: 2700K-5600K linear
CRI: up to 95
Fixture Output: 6,200lm
Optical angle: 26 ° (5 ° /10 ° /14 ° /19 ° /36 ° /50 ° optional)

Effects

Dimming: 0-100% linear dimming

Protection rating

IP20

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Software
Upgrade with DMX
5 Control channel modes: 5/6/8/13/19 CH

Control
RDM protocol

Electric parameter
AC100-240V, 50/60Hz
Power: 200W

Dimension and weight
Product dimension: 201.7x268.4x617.2mm (Fixture)
Packing dimension (carton): 575x395x355mm (Fixture)
Net weight: 7.2kg (Fixture)
Gross weight (carton): 9.5kg (Fixture)

Colours/ Gobos


:

:

:

Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

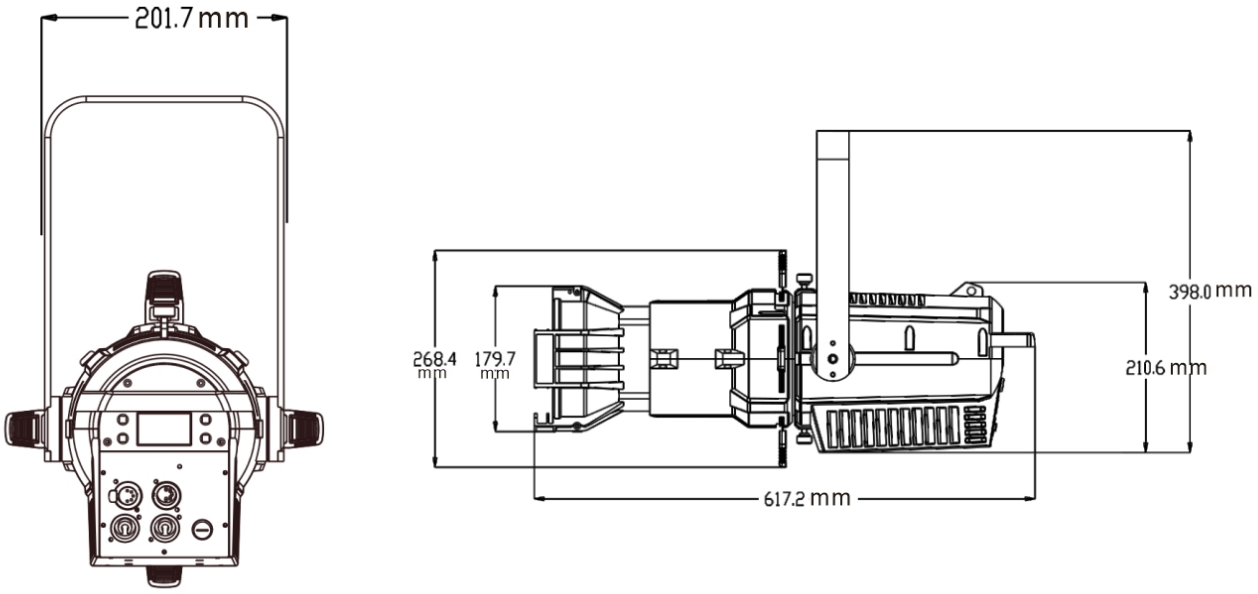


Photometrics

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Intensity LUX(19°)


RED	132	34	15	8
GREEN	335	83	37	21
BLUE	99	26	12	7
MINT	1900	467	208	117
AMBER	98	24	11	6
FULL	2450	624	276	156



Distance(m)	5	10	15	20
Diameter(m)	Φ1.7	Φ3.3	Φ5.0	Φ6.7

Intensity LUX(26°)


RED	70	94	42	24
GREEN	167	45	20	11
BLUE	52	15	7	4
MINT	925	241	107	60
AMBER	52	14	6	3
FULL	1218	316	140	79



Distance(m)	5	10	15	20
Diameter(m)	Φ2.3	Φ4.6	Φ6.9	Φ9.2

Intensity LUX(36°)

RED	45	12	6	3
GREEN	92	24	11	6
BLUE	28	7	3	2
MINT	516	133	59	33
AMBER	29	9	4	2
FULL	678	174	78	44



Distance(m)	5	10	15	20
Diameter(m)	Φ3.2	Φ6.5	Φ9.7	Φ13.0

Errors and omissions are possible. All specifications are subject for change without prior notice.