



## T180C LED PROFILE



### Product parameters

#### Optical system

Source: R/G/B/A/M,5-in-1 LED Engine,180W

Fixture CT: 2700K-5600K linear

CRI: up to 95

Fixture Output: 6,200lm

Optical angle: 26 ° (5 ° /10 ° /14 ° /19 ° /36 ° /50 ° optional)

#### Effects

Dimming: 0-100% linear dimming

#### Protection rating

IP20



---

## Software

Upgrade with DMX

5 Control channel modes: 5/6/8/13/19 CH

## Control

RDM protocol

## Electric parameter

AC100-240V, 50/60Hz

Power: 200W

## Dimension and weight

Product dimension: 201.7x268.4x617.2mm (Fixture)

Packing dimension (carton): 575x395x355mm (Fixture)

Net weight: 7.2kg (Fixture)

Gross weight (carton): 9.5kg (Fixture)


## Colours/ Gobos

:

:

:

## Dimensions

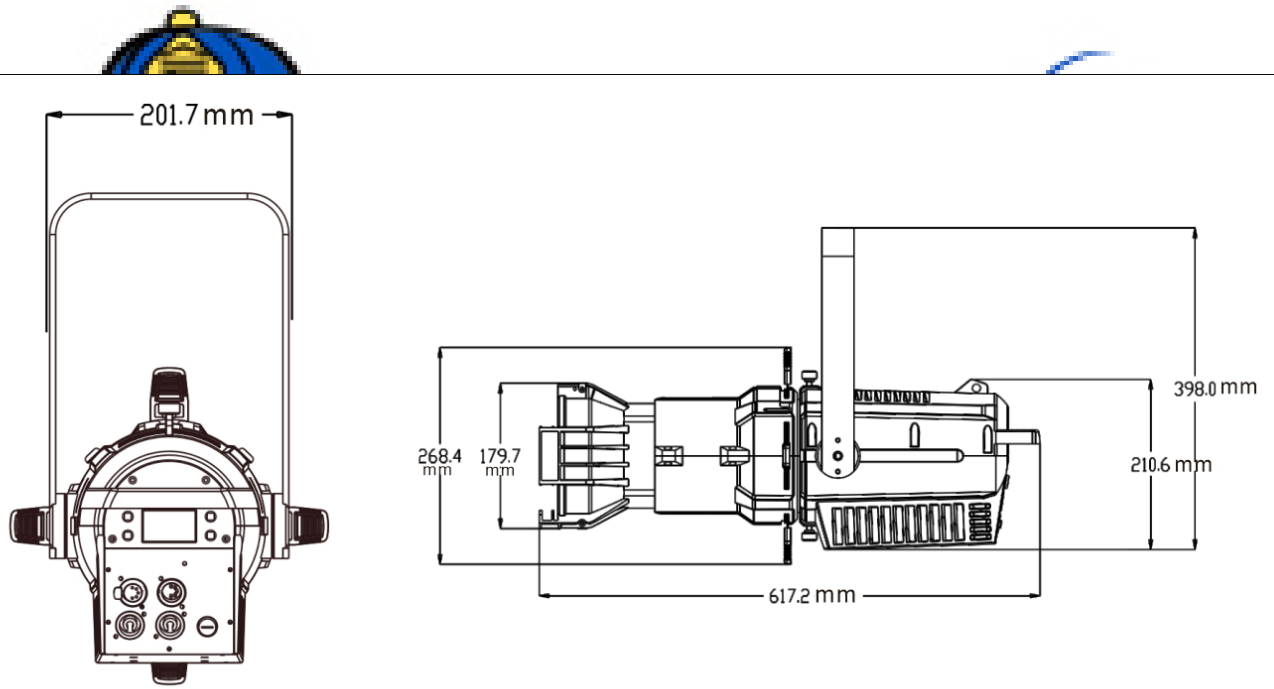


## Photometrics



Intensity LUX(19°)


RED	132	34	15	8
GREEN	335	83	37	21
BLUE	99	26	12	7
MINT	1900	467	208	117
AMBER	98	24	11	6
FULL	2450	624	276	156

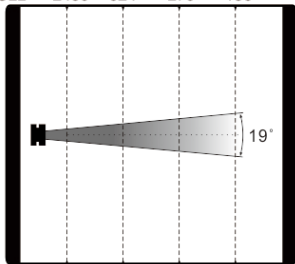

Distance(m)	5	10	15	20
Diameter(m)	Φ 1.7	Φ 3.3	Φ 5.0	Φ 6.7

Intensity LUX(26°)


RED	70	94	42	24
GREEN	167	45	20	11
BLUE	52	15	7	4
MINT	925	241	107	60
AMBER	52	14	6	3
FULL	1218	316	140	79

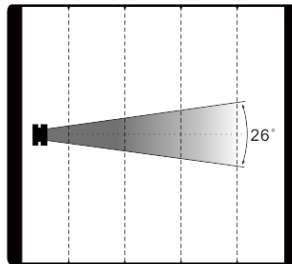

Distance(m)	5	10	15	20
Diameter(m)	Φ 2.3	Φ 4.6	Φ 6.9	Φ 9.2

Intensity LUX(36°)

RED	45	12	6	3
GREEN	92	24	11	6
BLUE	28	7	3	2
MINT	516	133	59	33
AMBER	29	9	4	2
FULL	678	174	78	44

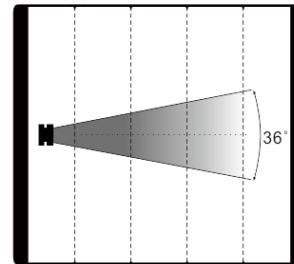

Distance(m)	5	10	15	20
Diameter(m)	Φ 3.2	Φ 6.5	Φ 9.7	Φ 13.0

Errors and omissions are possible. All specifications are subject for change without prior notice.