
Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

PIXI BAR C5

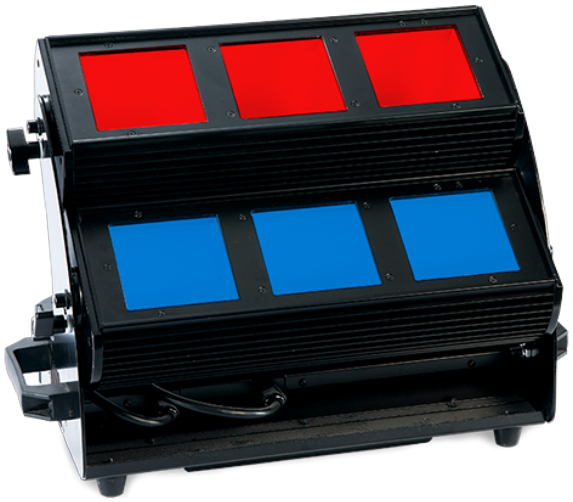

Product parameters

Optical system

Source: R/G/B/Y/W/DB/VG/HR,8-Color LED Engine
Fixture CT：8000K
Light source life expectancy：50000 hours Average Light Source Life*
CRI：≥78
Fixture output：8300lm

Effects

Zoom range: Beam Angle：44 ° x46 ° , Field Angle：75 ° x79 °
Dimming: 0-100% linear dimming

Protection rating

IP20

Software
Upgrade with DMX
3 Control channel modes: 12/20/28CH

Control
DMX 512/Manual
RDM protocol

Electric parameter
AC100-240V, 50/60Hz
Power：440W

Dimension and weight
Product dimension：506x309x353mm
Packing dimension (carton)：580x415x470mm
Net weight：11kg
Gross weight (carton)：15kg

***Testing conditions in the lab may differ based on various factors.**

Colours/ Gobos


:


:


:

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Dimensions

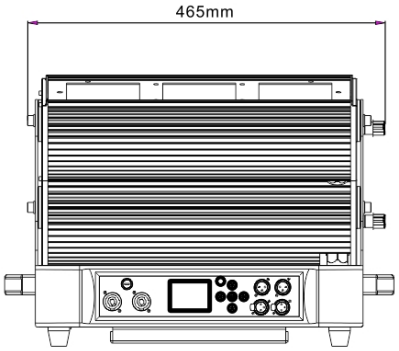

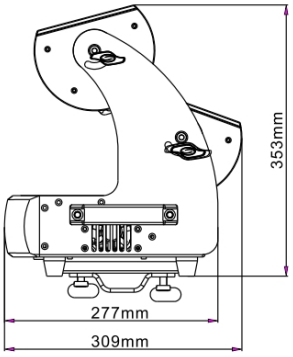


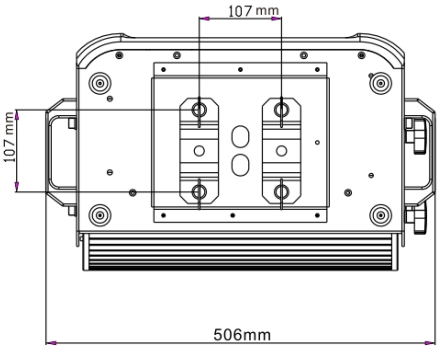

Photometrics

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

FULL	380	95	42	24
RED	71	18	8	5
BLUE	30	7	3	2
HR	20	5	2	1
C	69	17	8	4
G	149	37	17	9
DB	13	3	2	1
Y	40	10	4	3
W	148	37	16	9

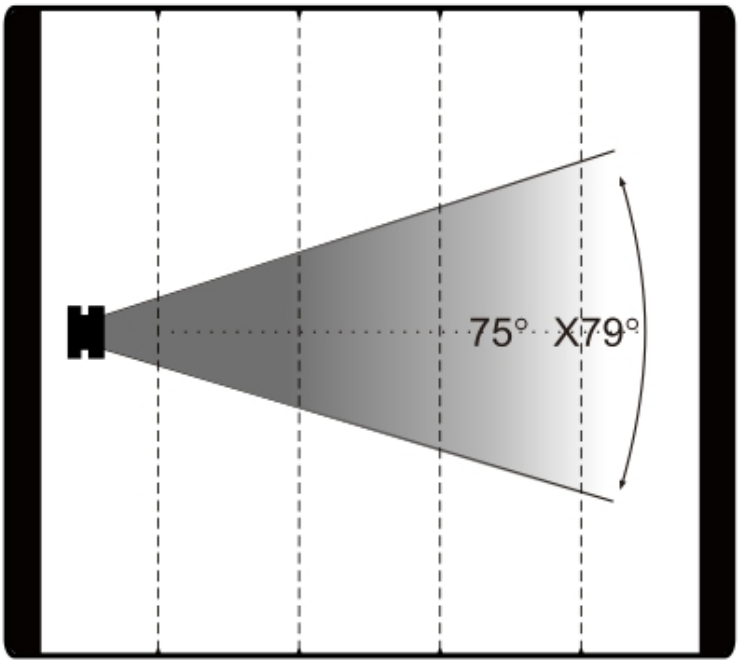

Distance(m)	5	10	15	20
Beam Width(m)	Φ7.7x8.2	Φ15.3x16.5	Φ23.0x24.7	Φ30.7x33.0

Errors and omissions are possible. All specifications are subject for change without prior notice.