T250 LED PROFILE

Product parameters

Optical system
Source: 250W White LED Engine
CRI: up to 94
Fixture Output: 10,000lm

Color system
Color temperature linear: 3200K to 6000K

Effects
Zoom: 17°-27° (field angle)
Dimming: 0-100% linear dimming

Protection rating

IP20

Software

3 Control channel modes: 2/3/7 CH

Control

Control: DMX512/manual mode

Electric parameter

AC 100-240V, 50/60Hz
Power: 300W

Dimension and weight

Product dimension: 36.8x45.8x76.4cm
Packing dimension (carton): 91.5x45.5x41.0cm
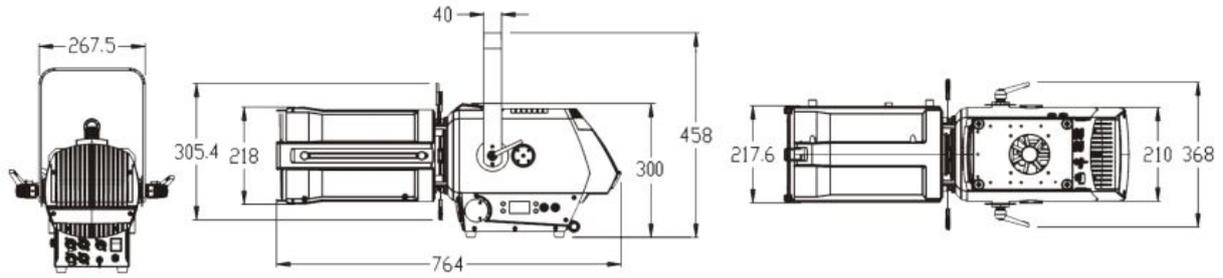Net weight: 14.0kgs
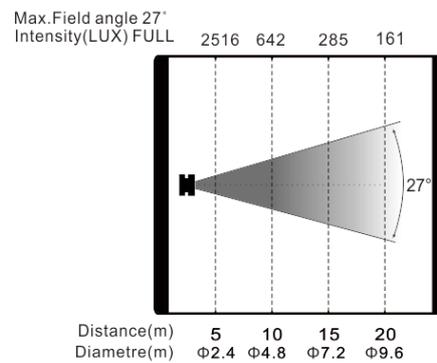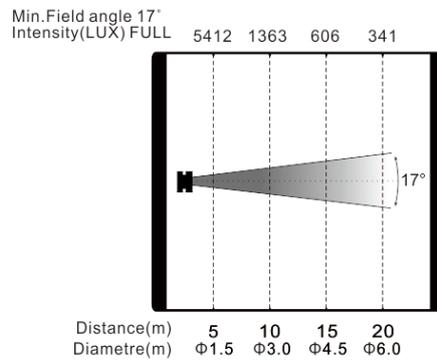Gross weight (carton): 19.5kgs

Colours/Gobos

:

:

:

Dimensions

Photometrics

Min.Field angle 17°
Intensity(LUX) FULL

| | 5412 | 1363 | 606 | 341 |

17°

| Distance(m) | 5 | 10 | 15 | 20 |
| Diametre(m) | Φ1.5 | Φ3.0 | Φ4.5 | Φ6.0 |

Max.Field angle 27°
Intensity(LUX) FULL

| | 2516 | 642 | 285 | 161 |

27°

| Distance(m) | 5 | 10 | 15 | 20 |
| Diametre(m) | Φ2.4 | Φ4.8 | Φ7.2 | Φ9.6 |

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399   FAX:+86 2039966388/39966399
Email: www.terbly.com   Website: sales@teroly.com