Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

TP300FX LED PANEL



Product parameters

Optical system

Source: R/G/B/W LEDs
Fixture CT: 2700K-8000K adjustable
Light source life expectancy：50,000 hours Average Light Source Life*
CRI: Ra：up to 98， R9：up to 96, R15：up to 97
Fixture output: 20000lm (white LED)

Color system

RGBW color mixing

Effects

Zoom range: 115 ° (beam angle), 160 ° (field angle)

Dimming: 0-100% linear dimming
Strobe: 1-25Hz, optional for synchronous strobe, pulse strobe and asynchronous strobe
GAMMA: 2.0/2.2/2.4/2.6/2.8
Refresh rate: 32KHz
"Scene Effects: Six LED panels with independent zone control, capable of creating various scene effects. Includes 11 built-in scene effects:
(Flame/ Police car/ Stage lighting/ Tungsten lamp/ Fluorescent light flicker/ Paparazzi/ Processing/ Television/ Welding/ Fireworks/ Lightning"

Protection rating
IP20

Display
Display

Software
Built-in macro effects
Upgrade with DMX
Remote reset DMX address and fixture by DMX
Run time of fixture and light source
Operational modes: DMX512/manual
2 Control channel modes: 36/61CH
Auto thermal protection circuit

Control
Input signal isolation
RDM protocol

Electric parameter
AC100-240V, 50/60Hz
Power: 300W

Dimension and weight

Product dimension: 680x408x107mm
Packing dimension (carton): 800x500x190mm
Net weight: 12 kg
Gross weight (carton): 13 kg

Others

Accessory: honeycomb cover,barndoor,lamp hook,mounting seat
Optional version：CW+WW,FW,CW,WW

***Testing conditions in the lab may differ based on various factors.**


Colours/ Gobos

:

:


:

Dimensions

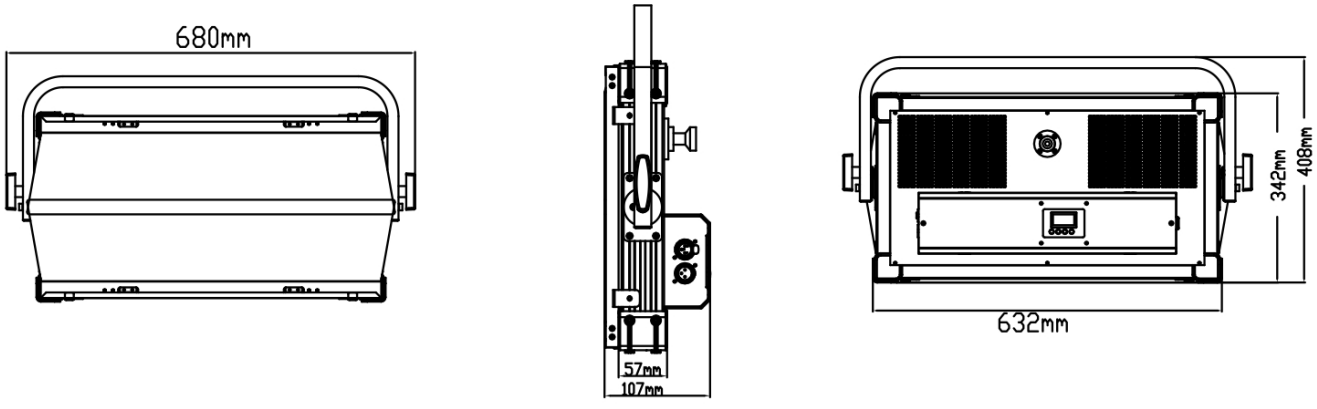

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Photometrics

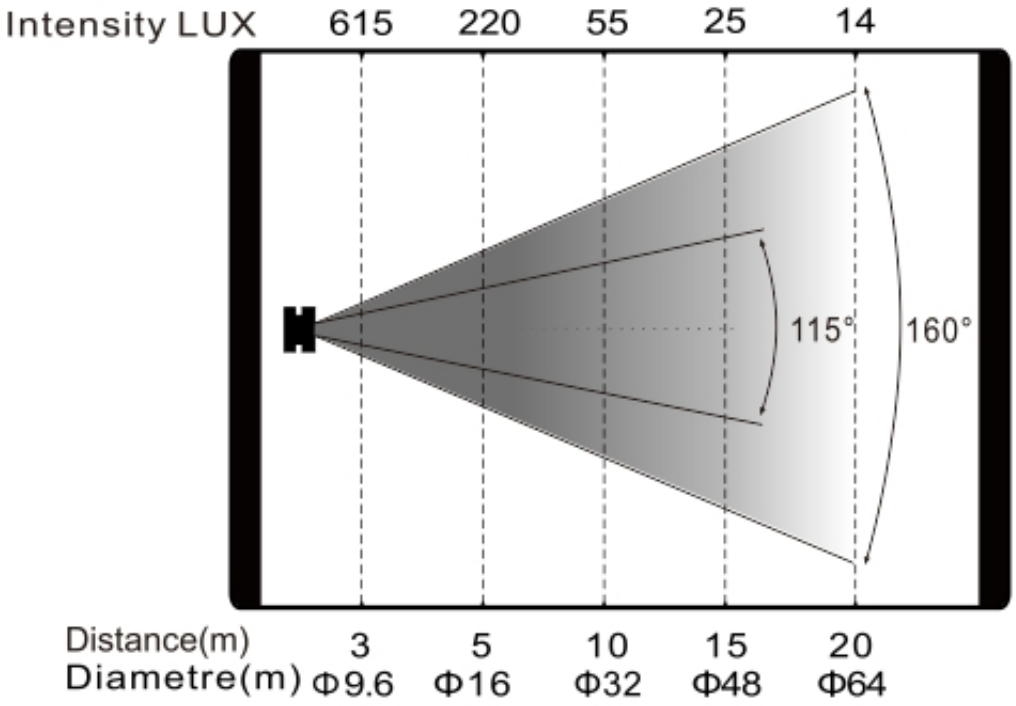

Errors and omissions are possible. All specifications are subject for change without prior notice.