



## PT320S SPOT



### Product parameters

#### OPTICS

Lamp: Philips Platinum 15R

CT:8000 K, Life: 2,000H

#### MOVEMENT

Pan movement: 540 ° /630 ° optional (16 bit )

Tilt movement: 265 ° (16 bit )

Advanced moving system: fast, stable and quiet, auto X-Y repositioning

#### COLORS

CMY color mixing and speed adjustable

1 Color wheel: 6 dichroic filters +open, rainbow effect



---

30 CMY+CTO+Color Macros and random CMY

## GOBOS

1 Rotating gobo wheel: 8 interchangeable, rotating, indexable, gobos+open

1 Static gobo wheel: 14 indexable gobos+open

## FEATURES

3 Control channel modes: 23/21/34 channels

Rotating prism: 3 facets and prism macros

Focus: motorized focus

Shutter: Variable from 1-13 flashes or random strobe

Dimming: 0-100% full range dimming

Iris: motorized linear change from 5%-100%

Frost: 0-100%

Zoom: 6 ° -28 ° linear zoom

## DISPLAY

Friendly touch full color LCD display, with rechargeable battery

locked automatically after 15 seconds from the last button press to

prevent incorrect operation, long press menu button for 3 seconds to activate keys again

Humanized reset detection set: long press menu and enter button to lock pan/tilt reset, can support fixtures do the reset detection in flight case

## SOFTWARE

7 pre-built programs can be selected

Software upgrade: through DMX cable conveniently, quickly upgrade software

Remote DMX addressing, lamp of/off, reset, sound control switch by controller

Display the fixture and lamp running time so customers can get to know the situation about lamp usage

## OTHER SPEC

Signal isolation protection function: guarantee Signal transmission is very stable and without interference



High temperature automatic protection function: lamp off automatically as fixture achieve high temperature until it cool down to gurantee fixture safe usage.

Optional Built in wireless receiver

Advanced RDM function

## POWER

AC100-240V, 50/60HZ

## DIMENSIONS AND WEIGHT

Packing dimension: 76.5 x 50.5 x 46.5 cm

Net Weight: 22.5kgs

Gross Weight: 26.5kgs


## Colours/ Gobos

COLOR WHEEL: 

ROTATING GOBO WHEEL: 

STATIC GOBO WHEEL: 


## Dimensions

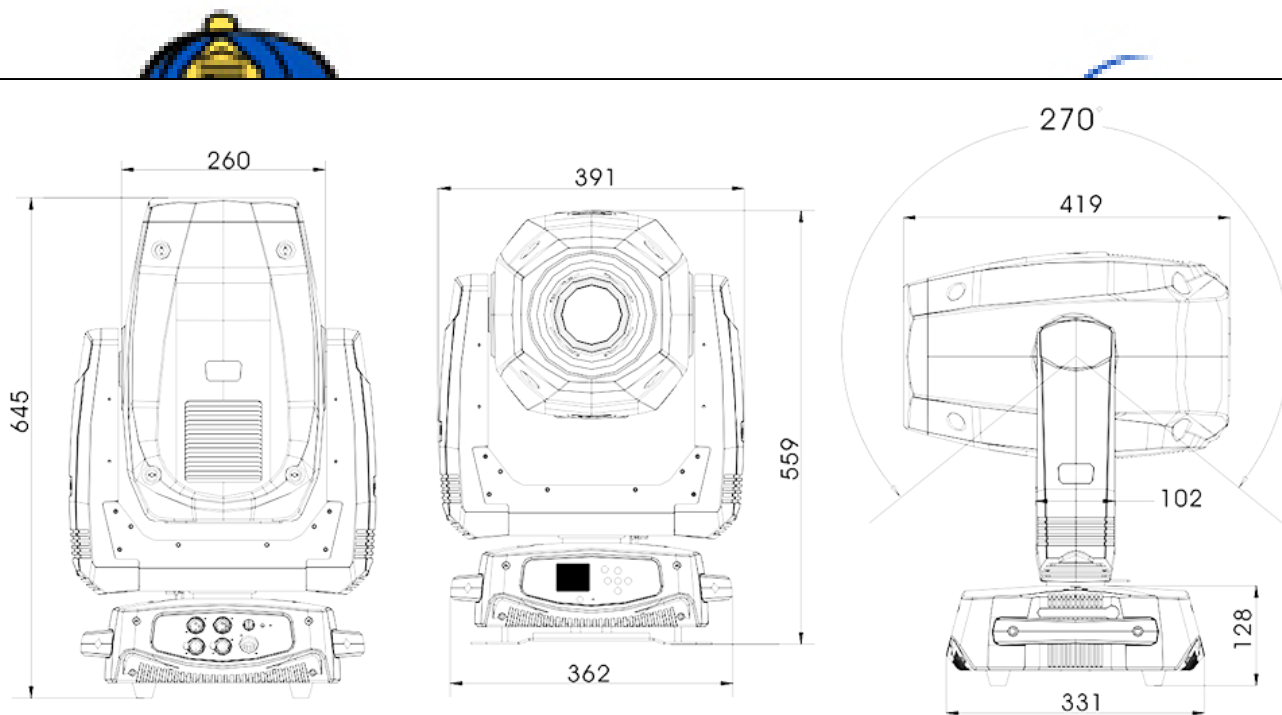

## Photometrics



	8250	2180	950
Intensity LUX	145000	38600	17000

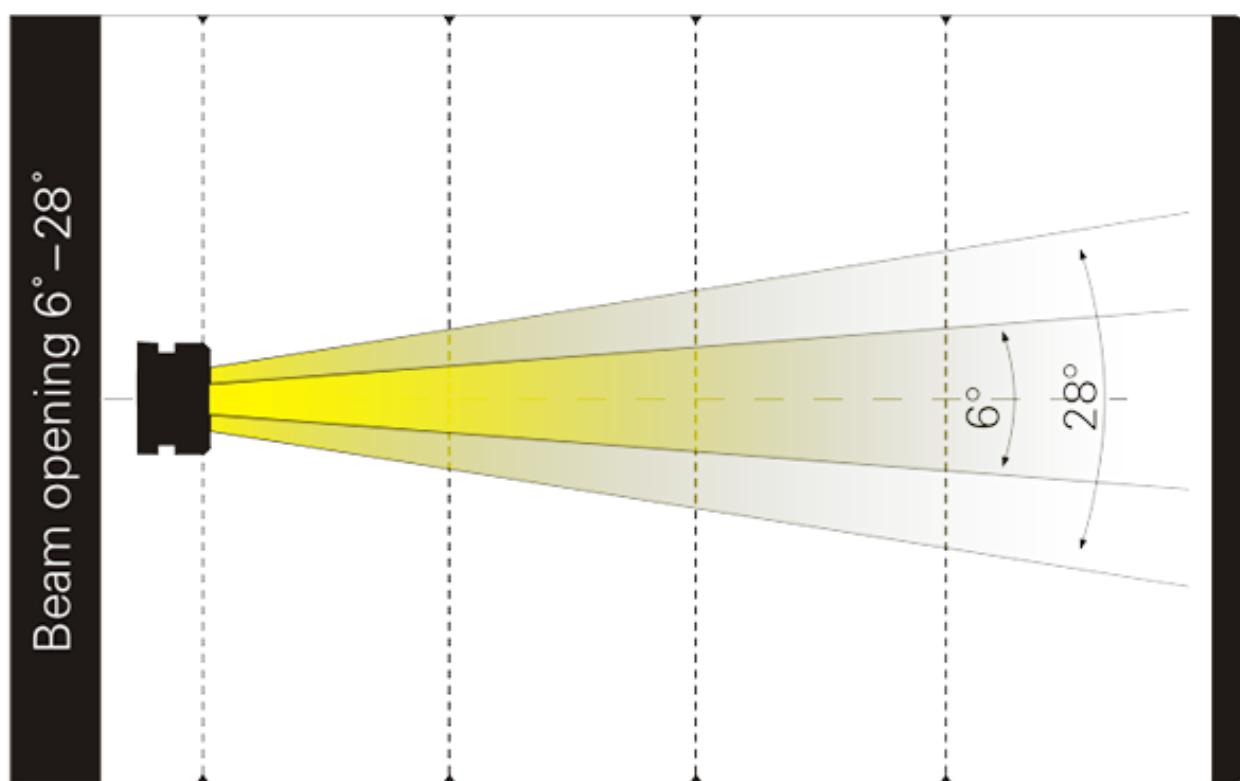

Distance(m)	2.5	5.0	7.5
6° Diameter(m)	Φ0.26	Φ0.52	Φ0.79
28° Diameter(m)	Φ1.25	Φ2.49	Φ3.74

Errors and omissions are possible. All specifications are subject for change without prior notice.