Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

S380B IP BEAM

Product parameters

Optical system

Source: Philips MSD Platinum Flex 300, 380W
Fixture CT: 6500K
Light source life expectancy：6000 hours Average Light Source Life*
*Testing conditions in the lab may differ based on various factors.
Illuminance: 160000lux@20m

Movement

Pan: 540 ° /630 ° optional(16 bit)
Tilt: 270 ° (16 bit)
Auto X/Y repositioning

Color system
CMY color mixing
1 Color wheel: 14 dichroic filters + open

Gobo system
1 Static gobo wheel: 15 gobos + open

Effects
Motorized focus
Beam angle: 2 °
2 Rotating prisms: 4 linear + 16 facet,dynamic prism morph, indexable with macros
Frost
Dimming: 0-100% linear dimming
Shutter: mechanical with various speed

Protection rating
IP66

Display
Battery operated for fast addressing,15 seconds standby auto lock
Pan/tilt disengage (hold Left arrow and Right arrow buttons)

Software
Upgrade with DMX
Remote reset DMX address and fixture by DMX
Run time of fixture and light source
3 Control channel modes: 19/17/27CH
Auto thermal protection circuit

Control
Input signal isolation
RDM protocol

Electric parameter

AC200-240V, 50/60Hz
Power: 550W

Dimension and weight

Product dimension: 468x370x718mm
Packing dimension (carton): 865x560x465mm
Net weight: 37kg
Gross weight (carton): 42kg

Colours/ Gobos

COLOR WHEEL:

STATIC GOBO WHEEL:

:

Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

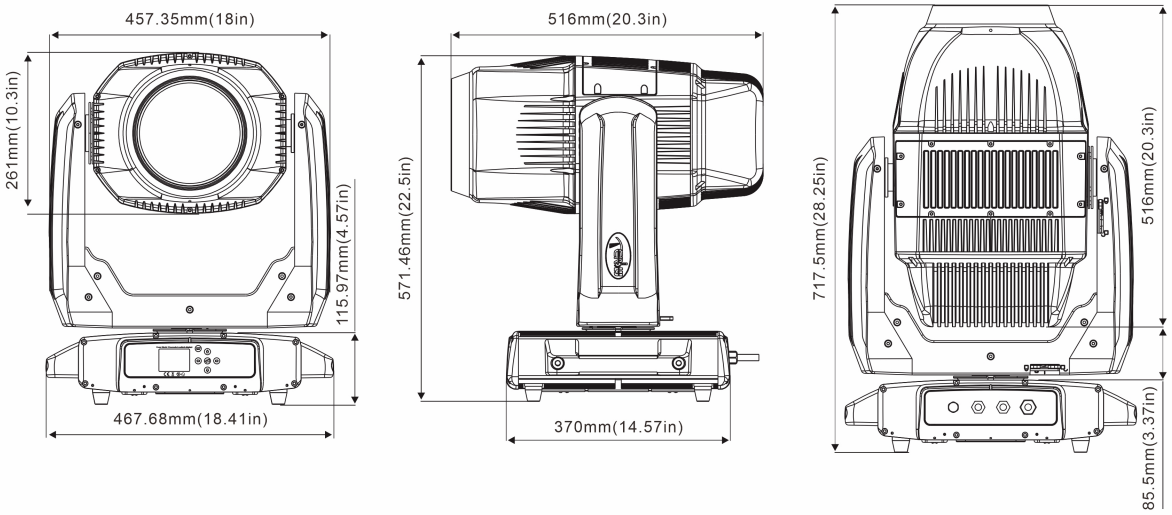

Photometrics

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Intensity LUX (2°)

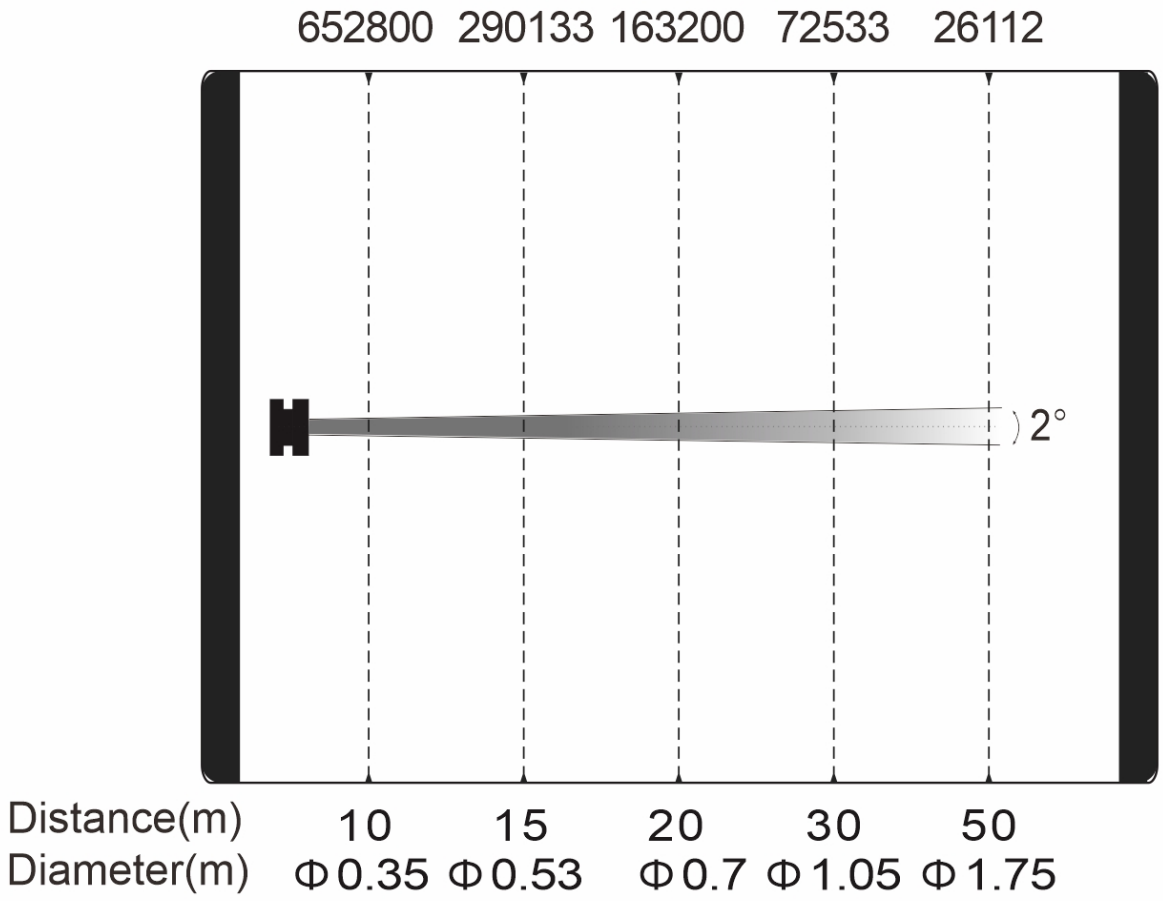

Errors and omissions are possible. All specifications are subject for change without prior notice.