Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

S620H HYBRID



Product parameters

Optical system

Source: Philips MSD Platinum 19 R LL, 420W
Fixture CT：6700K
"Light source life expectancy：5000 hours Average Light Source Life*
*Testing conditions in the lab may differ based on various factors."
Fixture output：17000lm

Movement

Pan: 540 ° /630 ° optional(16 bit)
Tilt: 270 ° (16 bit)
Auto pan/tilt repositioning

Color system
CMY color mixing
1 color wheel：14 dichroic filters + open, color effect, indexable, split color effect, rainbow effect

Gobo system
1 Rotating gobo wheel:8 interchangeable gobos + open. Gobo OD: 16.3mm
1 Static gobo wheel:14 gobos + open

Effect
Motorized focus
Zoom range: beam mode:2.3 ° -28 ° ; spot mode: 5.5 ° -42 ° ; wash mode: 11 ° -40 °
Auto focus
2 Rotating prism: 4-facet linear prism + 8-facet circular prism, indexable, 16 prism Macros
Frost
Dimming: 0-100% linear dimming
Strobe: electronic, variable from 1-25Hz or pulse

Protection rating
IP20

Display
Display: optional with rechargeable battery, locked automatically after standby for 15 seconds
Pan/tilt disengage (hold Left and Right arrow buttons), support to complete the reset detection in the flight case

Software
Upgrade with DMX
Remote reset DMX address and fixture by DMX
Run time of fixture and light source
2 Control channel modes: 25/36 CH

Auto thermal protection circuit

Control

Input signal isolation
RDM protocol

Electric parameter

AC200-240V, 50/60Hz
Power consumption: 600W

Dimension and weight

Product dimension: 395x270x617mm
Packing dimension (carton): 730x475x385mm
Net weight: 20 kg
Gross weight (carton): 25 kg

Colours/ Gobos


COLOR WHEEL: 

ROTATING GOBO WHEEL: 


STATIC GOBO WHEEL: 


Dimensions


Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

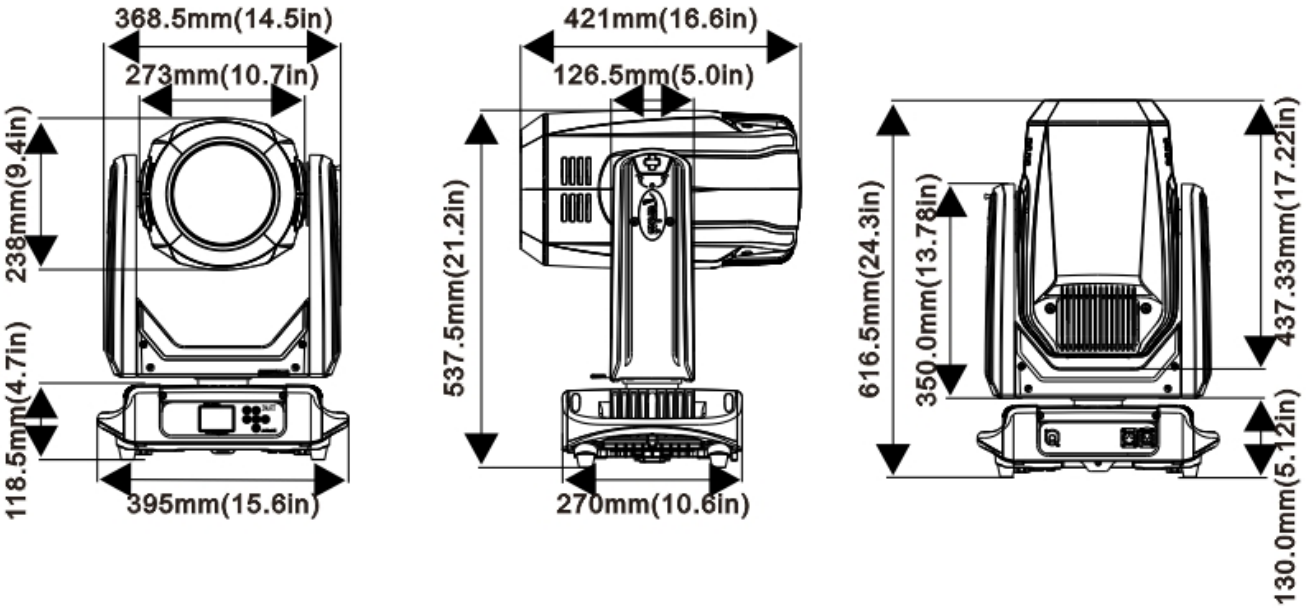



Photometrics

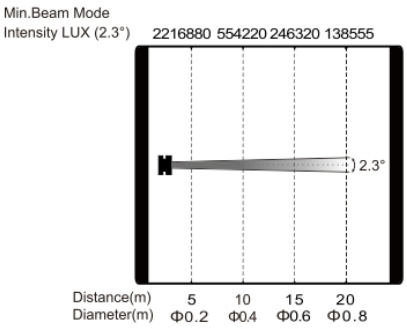


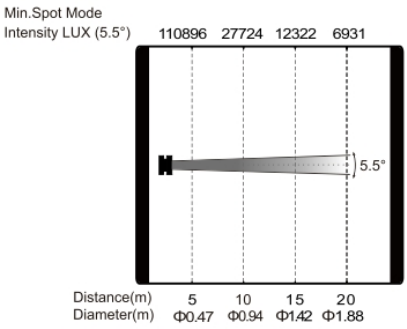

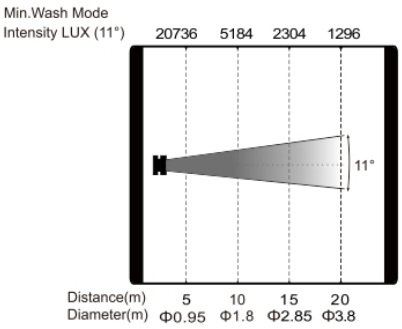

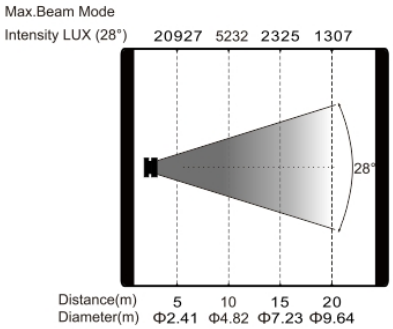

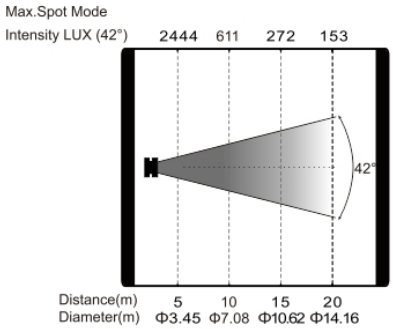

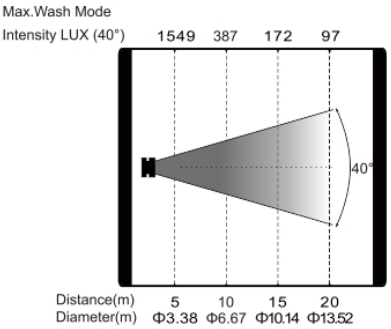

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Errors and omissions are possible. All specifications are subject for change without prior notice.