Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

G10B BEAM



Product parameters

OPTICS
Source: Philips Platinum 17RA, 350W
CT: 7000K
Life: 1,500H

MOVEMENT
Pan movement: 540 ° /630 ° optional (16 bit)
Tilt movement: 270 ° (16 bit)
Advanced motion system: auto repositioning, fast, quiet and smooth

COLORS
1 Color wheel: 10 dichroic filters + open

GOBOS
1 Static gobo wheel: 13 + open

FEATURES
Rotating prism: 8 facet prism
Focus
Shutter: mechanical, variable from 1-25Hz or random
Dimmer: 0%-100% linear dimming
Frost: 0-100%
Beam angle: 3 °

DISPLAY
Battery operated for fast
addressing
15 second standby auto lock
Pan/ Tilt disengage (hold MENU and ENTER button)

SOFTWARE
Upgrades: fast and convenient using uploader over DMX
Remote reset DMX address, lamp control, fixture reset, sound control by DMX
Run time of lamp and fixture
3 Control channel modes: 14/12/18 channels

OTHER SPEC
Input signal isolation
Auto thermal protection circuit
Optional installed wireless receiver
RDM compatible

POWER
AC100-240V, 50/60HZ

DIMENSIONS AND WEIGHT

Packing dimension: 69.5x49.5x42.5cm
Net weight: 27kgs
Gross weight: 33kgs

Colours/ Gobos


COLOR WHEEL: 

STATIC GOBO WHEEL: 

:

Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

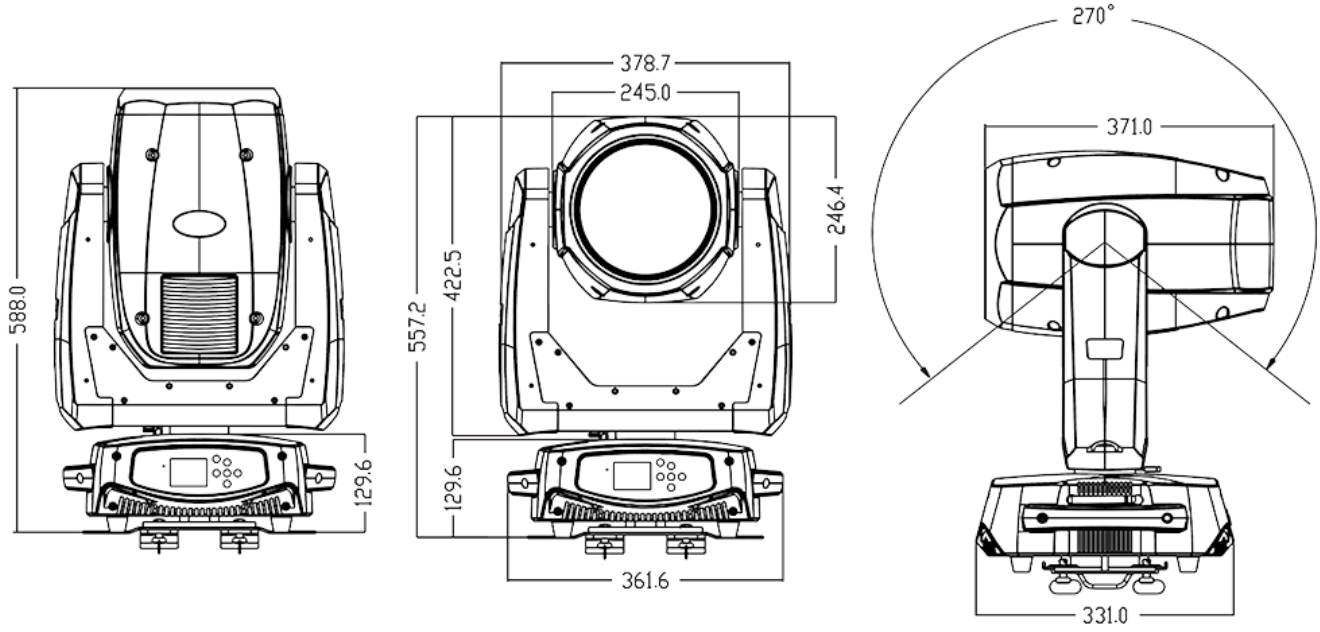


Photometrics

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399 FAX:+86 2039966388/39966399
Email: www.terbly.com Website: sales@teroly.com

Beam angle 3°

Intensity LUX	219400	129400	84680

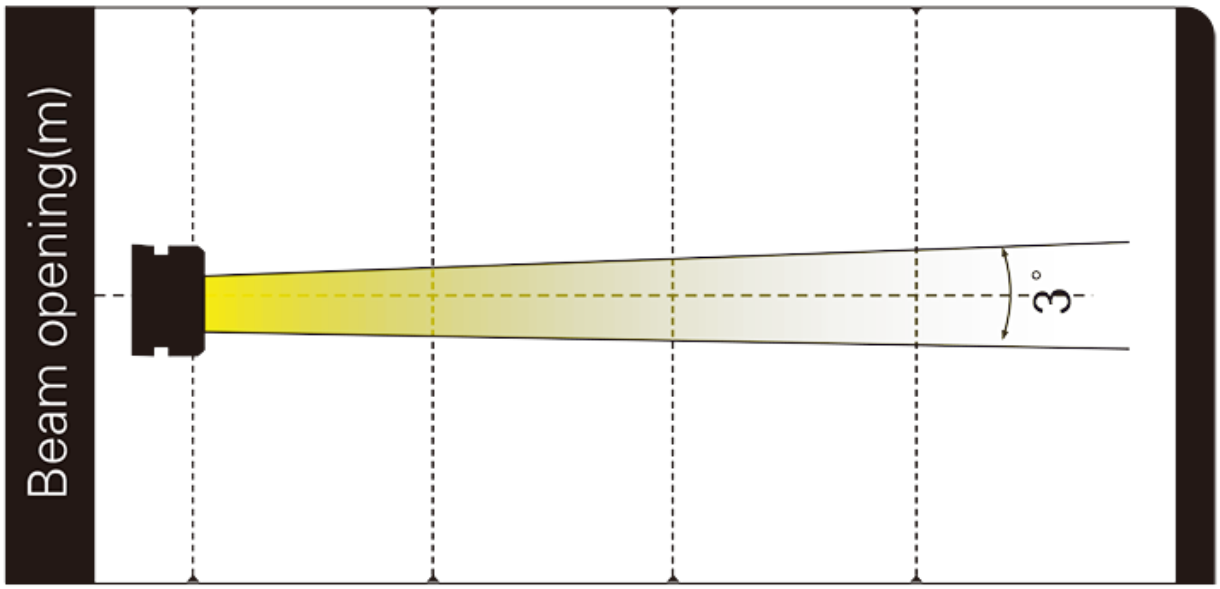

Distance(m)	15	20	25
Diameter(m)	Φ0.64	Φ0.85	Φ1.06

Errors and omissions are possible. All specifications are subject for change without prior notice.