Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399   FAX:+86 2039966388/39966399
Email: www.terbly.com   Website: sales@teroly.com

LED STRIP PB4D-RGBW

Product parameters

OPTICS
4 x 10W high power LEDs
RGBW 4 in 1 LED make extremely even and smooth color mixing effect
Extremely Long Life: 50,000H and low power consumption

COLORS
Excellent color mixing and rainbow effect
Color temperature linear adjust from 2700K to 8000K, preset color temperature scenes with : 2700K,3200K,4300K, 5600K,6500K,8000K options

FEATURES
5 Control channel modes: 4/5/8/10/16 channels

3 operational modes: DMX-512, Master/Slave & Sound Active

Pixel control makes extremely chasing effect

Lens angle: 10° (standard), 25° (optional), 10x40° (optional)

Strobe effect with 1-25 flashes per second and pulse effect

General dimming and blackout for all LEDs

Protection rating: IP65, aluminium die-case

DISPLAY

Friendly touch full color LCD display, with rechangeable battery

locked automatically after 15 seconds from the last button press to prevent incorrect operation, long press menu button for 3 seconds to activate keys again

SOFTWARE

8 pre-built programs can be selected and can be called up via DMX controller

Software upgrade: through DMX cable conveniently, quickly upgrade software

OTHER SPEC

Optional remote controller for simple control of color selection, shutter and dimmer

Optional Kling net signal control

With an easily mounted metal holder enable to fit with optional diffusing film to get different beam angles and effect

Advanced RDM function

POWER

AC 100-240V, 50/60HZ

DIMENSIONS AND WEIGHT

Packing dimension: 51x24x24.5cm

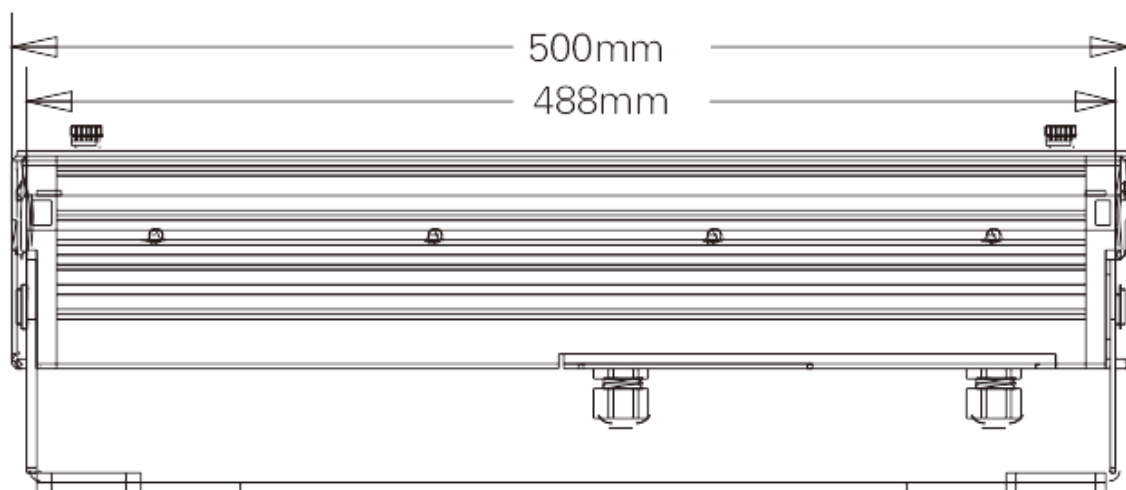Net Weight: 5.5kgs

Gross Weight: 7.5kgs

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399   FAX:+86 2039966388/39966399
Email: www.terbly.com   Website: sales@teroly.com

Colours/Gobos

:

:

:

Dimensions

Guangzhou Haoyang Electronic Co., Ltd.
Address: No. 18, the First Crossroad of Lianyun Road, Shiqi Town, Panyu District, Guangzhou.
TEL:+86 2039966388/39966399   FAX:+86 2039966388/39966399
Email: www.terbly.com   Website: sales@teroly.com

Photometrics

Beam angle 10°
Field angle 21°

Intensity LUX				
Red leds	1810	461	220
Green leds	3220	244	370
Blue leds	430	111	53
White leds	3630	930	414
Full leds	8410	2180	971

Beam opening(m)

10° - 21°

Distance(m)	1	2	3
10°Diameter(m)	Φ0.2	Φ0.4	Φ0.6
21°Diameter(m)	Φ0.37	Φ0.74	Φ1.11
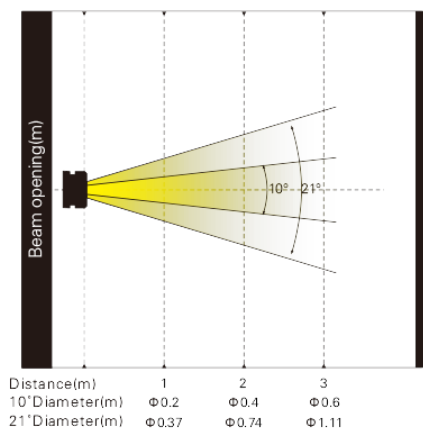
Errors and omissions are possible. All specifications are subject for change without prior notice.